



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp®2006 = 150

SPECfp_base2006 = 143

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

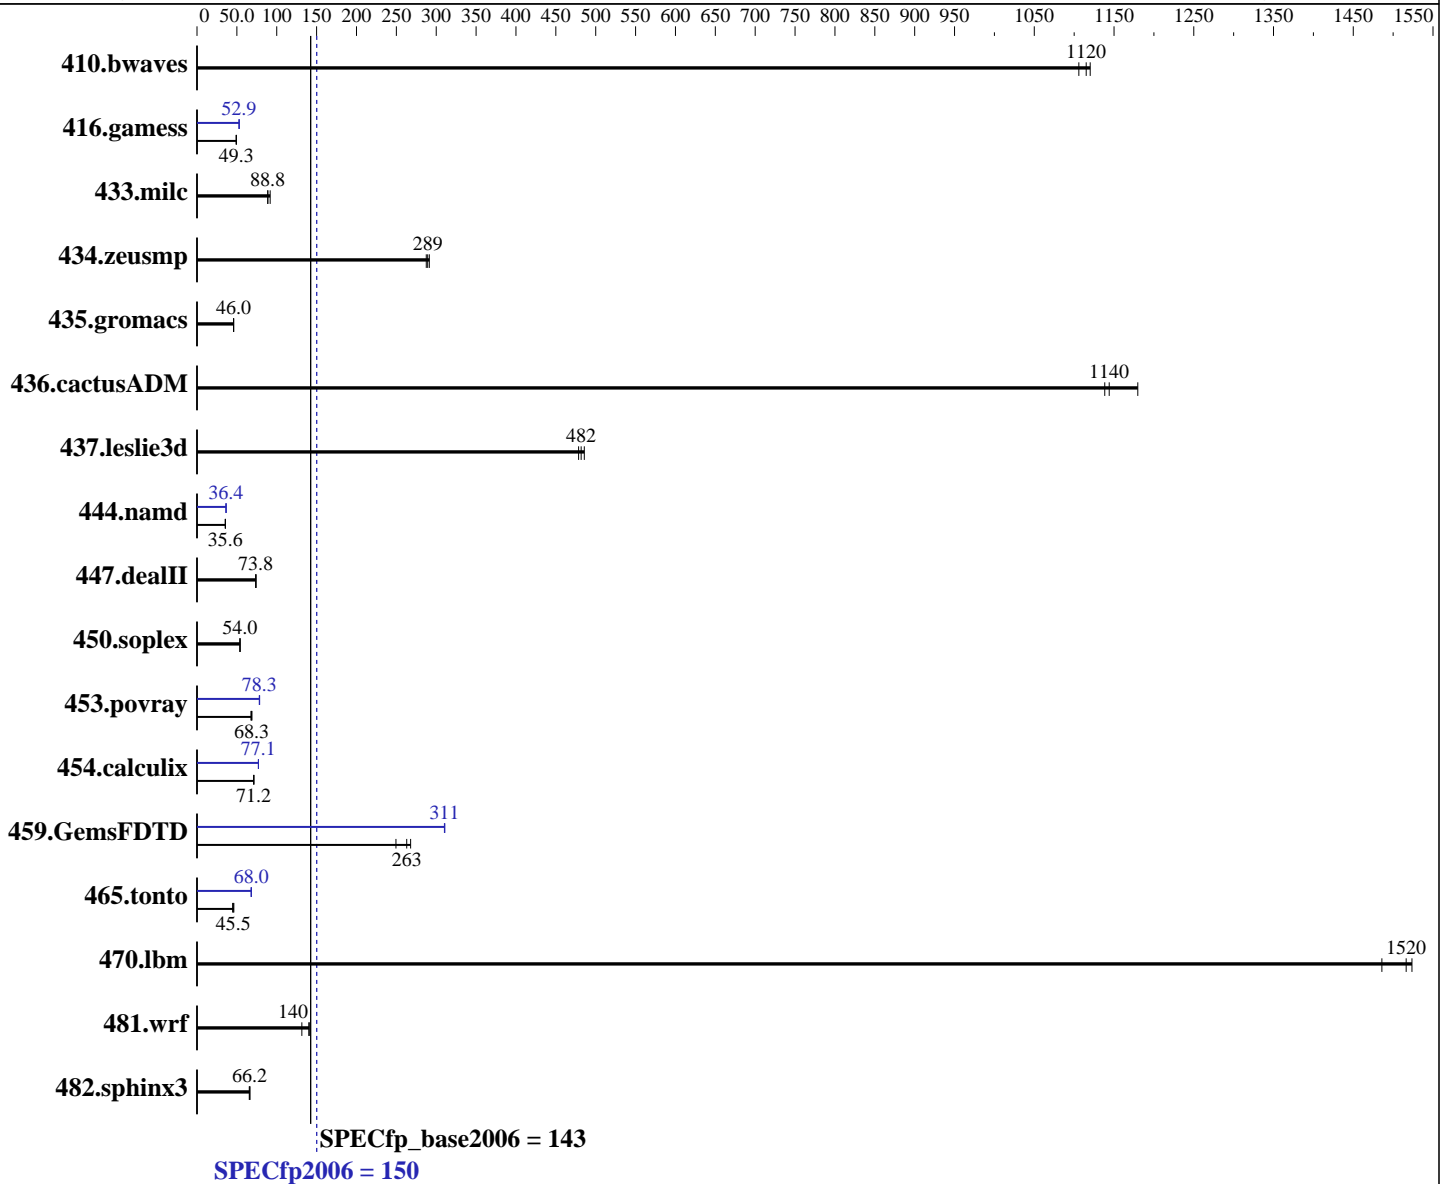

Hardware

CPU Name: Intel Xeon Platinum 8170
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server 7.3 (Maipo),
 Kernel 3.10.0-514.6.1.el7.x86_64
 C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 = 150

SPECfp_base2006 = 143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

L3 Cache: 35.75 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>12.2</u>	<u>1120</u>	12.3	1110	12.1	1120	<u>12.2</u>	<u>1120</u>	12.3	1110	12.1	1120
416.gamess	397	49.3	<u>397</u>	<u>49.3</u>	397	49.3	370	52.9	371	52.8	<u>370</u>	<u>52.9</u>
433.milc	103	88.8	<u>103</u>	<u>88.8</u>	100	91.8	103	88.8	<u>103</u>	<u>88.8</u>	100	91.8
434.zeusmp	<u>31.5</u>	<u>289</u>	31.7	288	31.2	291	<u>31.5</u>	<u>289</u>	31.7	288	31.2	291
435.gromacs	155	46.0	<u>155</u>	<u>46.0</u>	156	45.8	155	46.0	<u>155</u>	<u>46.0</u>	156	45.8
436.cactusADM	10.1	1180	<u>10.4</u>	<u>1140</u>	10.5	1140	10.1	1180	<u>10.4</u>	<u>1140</u>	10.5	1140
437.leslie3d	19.4	486	<u>19.5</u>	<u>482</u>	19.6	479	19.4	486	<u>19.5</u>	<u>482</u>	19.6	479
444.namd	<u>225</u>	<u>35.6</u>	225	35.6	226	35.6	220	36.4	<u>220</u>	<u>36.4</u>	220	36.5
447.dealII	155	73.6	<u>155</u>	<u>73.8</u>	155	74.0	155	73.6	<u>155</u>	<u>73.8</u>	155	74.0
450.soplex	<u>155</u>	<u>54.0</u>	154	54.0	155	53.9	<u>155</u>	<u>54.0</u>	154	54.0	155	53.9
453.povray	<u>77.8</u>	<u>68.3</u>	78.7	67.6	77.2	68.9	<u>68.0</u>	<u>78.2</u>	<u>68.0</u>	<u>78.3</u>	67.7	78.6
454.calculix	116	71.3	116	71.1	<u>116</u>	<u>71.2</u>	107	77.0	<u>107</u>	<u>77.1</u>	107	77.1
459.GemsFDTD	<u>40.3</u>	<u>263</u>	39.6	268	42.5	249	<u>34.2</u>	<u>311</u>	34.2	310	34.2	311
465.tonto	213	46.2	220	44.7	<u>216</u>	<u>45.5</u>	145	68.0	<u>145</u>	<u>68.0</u>	144	68.2
470.lbm	9.02	1520	<u>9.06</u>	<u>1520</u>	9.25	1490	9.02	1520	<u>9.06</u>	<u>1520</u>	9.25	1490
481.wrf	<u>79.6</u>	<u>140</u>	85.0	131	79.3	141	<u>79.6</u>	<u>140</u>	85.0	131	79.3	141
482.sphinx3	<u>294</u>	<u>66.2</u>	294	66.3	297	65.5	<u>294</u>	<u>66.2</u>	294	66.3	297	65.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"

Platform Notes

BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 = 150

SPECfp_base2006 = 143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

Platform Notes (Continued)

LLC Dead Line Allocation set to Disabled
Workload Pofile set to General Peak Frequency Compute
Energy/Performance Bias set to Maximum Performance
Uncore Frequency Scaling set to Auto
Workload Pofile set to Custom
NUMA Group Size Optimization set to Flat

Sysinfo program /cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on DL380-sys2-RHEL73 Thu Sep 28 03:11:58 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
 2 "physical id"s (chips)
 52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 26
  siblings       : 26
  physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
                  26 27 28 29
  physical 1:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
                  26 27 28 29
cache size      : 36608 KB
```

From /proc/meminfo

```
MemTotal:      197569560 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux DL380-sys2-RHEL73 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38
EST 2016 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 = 150

SPECfp_base2006 = 143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

Platform Notes (Continued)

run-level 3 Sep 27 22:46

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	889G	29G	861G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=core,compact"

LD_LIBRARY_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

OMP_NUM_THREADS = "52"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 =

150

SPECfp_base2006 =

143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 =

150

SPECfp_base2006 =

143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECfp2006 =

150

SPECfp_base2006 =

143

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Jul-2017

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Oct 19 11:34:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 October 2017.