



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint®_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

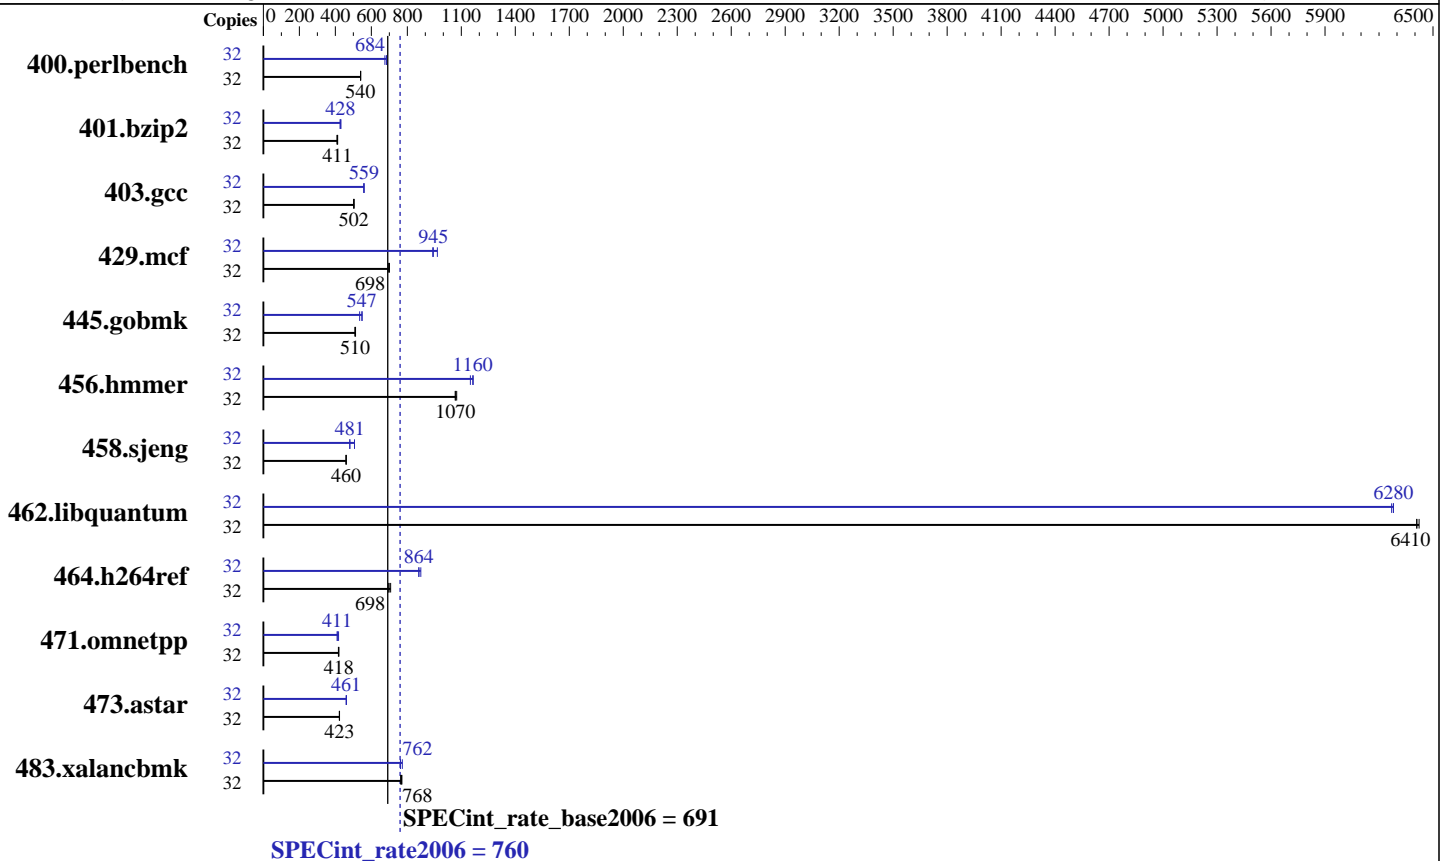

Hardware

CPU Name: AMD EPYC 7351P
 CPU Characteristics: AMD Turbo CORE technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 32 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 2 cores
 Other Cache: None
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)
 Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server 7.4
 Kernel 3.10.0-693.2.2
 Compiler: C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (Multi User)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|-------------|------------|-------------|-------------|------------|--------|------------|-------------|------------|------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 32 | 578 | 541 | 579 | 540 | <u>579</u> | <u>540</u> | 32 | <u>457</u> | <u>684</u> | 463 | 675 | 457 | 685 |
| 401.bzip2 | 32 | 748 | 413 | <u>751</u> | <u>411</u> | 755 | 409 | 32 | 716 | 431 | <u>722</u> | <u>428</u> | 724 | 427 |
| 403.gcc | 32 | 513 | 502 | <u>513</u> | <u>502</u> | 511 | 504 | 32 | <u>461</u> | <u>559</u> | 462 | 558 | 461 | 559 |
| 429.mcf | 32 | 419 | 697 | 417 | 701 | <u>418</u> | <u>698</u> | 32 | <u>309</u> | <u>945</u> | 302 | 967 | 310 | 941 |
| 445.gobmk | 32 | <u>658</u> | <u>510</u> | 655 | 512 | 659 | 509 | 32 | 627 | 535 | <u>613</u> | <u>547</u> | 611 | 549 |
| 456.hammer | 32 | <u>279</u> | <u>1070</u> | 280 | 1070 | 278 | 1070 | 32 | 260 | 1150 | 256 | 1170 | <u>257</u> | <u>1160</u> |
| 458.sjeng | 32 | 841 | 460 | 843 | 459 | <u>842</u> | <u>460</u> | 32 | 765 | 506 | 806 | 480 | <u>806</u> | <u>481</u> |
| 462.libquantum | 32 | 103 | 6420 | <u>103</u> | <u>6410</u> | 103 | 6410 | 32 | <u>106</u> | <u>6280</u> | 106 | 6280 | 106 | 6270 |
| 464.h264ref | 32 | 1001 | 707 | 1015 | 697 | <u>1015</u> | <u>698</u> | 32 | 809 | 875 | <u>820</u> | <u>864</u> | 820 | 864 |
| 471.omnetpp | 32 | 480 | 417 | <u>478</u> | <u>418</u> | 477 | 419 | 32 | 487 | 410 | <u>487</u> | <u>411</u> | 479 | 418 |
| 473.astar | 32 | 531 | 423 | <u>531</u> | <u>423</u> | 532 | 422 | 32 | 488 | 460 | 487 | 462 | <u>487</u> | <u>461</u> |
| 483.xalancbmk | 32 | <u>288</u> | <u>768</u> | 287 | 770 | 290 | 763 | 32 | 290 | 762 | <u>290</u> | <u>762</u> | 286 | 772 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS settings:
Determinism Slider = Power
cTDP Control = Manual

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Platform Notes (Continued)

cTDP = 200

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite, which is only available from AMD at

<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

Binaries were compiled on a system with 2 x AMD Opteron 6378 chips + 128 GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm

C++ benchmarks:

-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Oct-2017

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-mno-fma4 -GRA:aggr_loop_splitting=off
-GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4 -WB, -mno-tbm
-mno-xop

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Peak Optimization Flags (Continued)

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -OPT:unroll_size=256 -OPT:unroll_times_max=8
 -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
 -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
 -HP:bd=2m:heap=2m -march=bdver1 -mno-fma4

456.hmmcr: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -OPT:alias=disjoint
 -OPT:unroll_times_max=16 -OPT:unroll_size=512
 -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
 -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
 -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1
 -mno-fma4

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
 -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1 -mno-fma4

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
 -LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
 -CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
 -IPA:plimit=15000 -IPA:small_pu=100
 -HP:bd=2m:heap=2m,limit=300 -march=bdver2 -mno-fma4

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -OPT:unroll_size=256 -OPT:unroll_times_max=2
 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
 -CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1
 -mno-fma4

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
 -WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
 -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
 -OPT:alias=disjoint -INLINE:aggressive=on
 -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
 -march=bdver1 -mno-fma4

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
 -INLINE:aggressive=on -m32 -CG:cmp_peep=on
 -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
 -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
 -mno-fma4
 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 760

Sugon A320-G30 (AMD EPYC 7351P)

SPECint_rate_base2006 = 691

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:04:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.