



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

**SPECint®2006 = Not Run**

**SPECint\_base2006 = 59.5**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

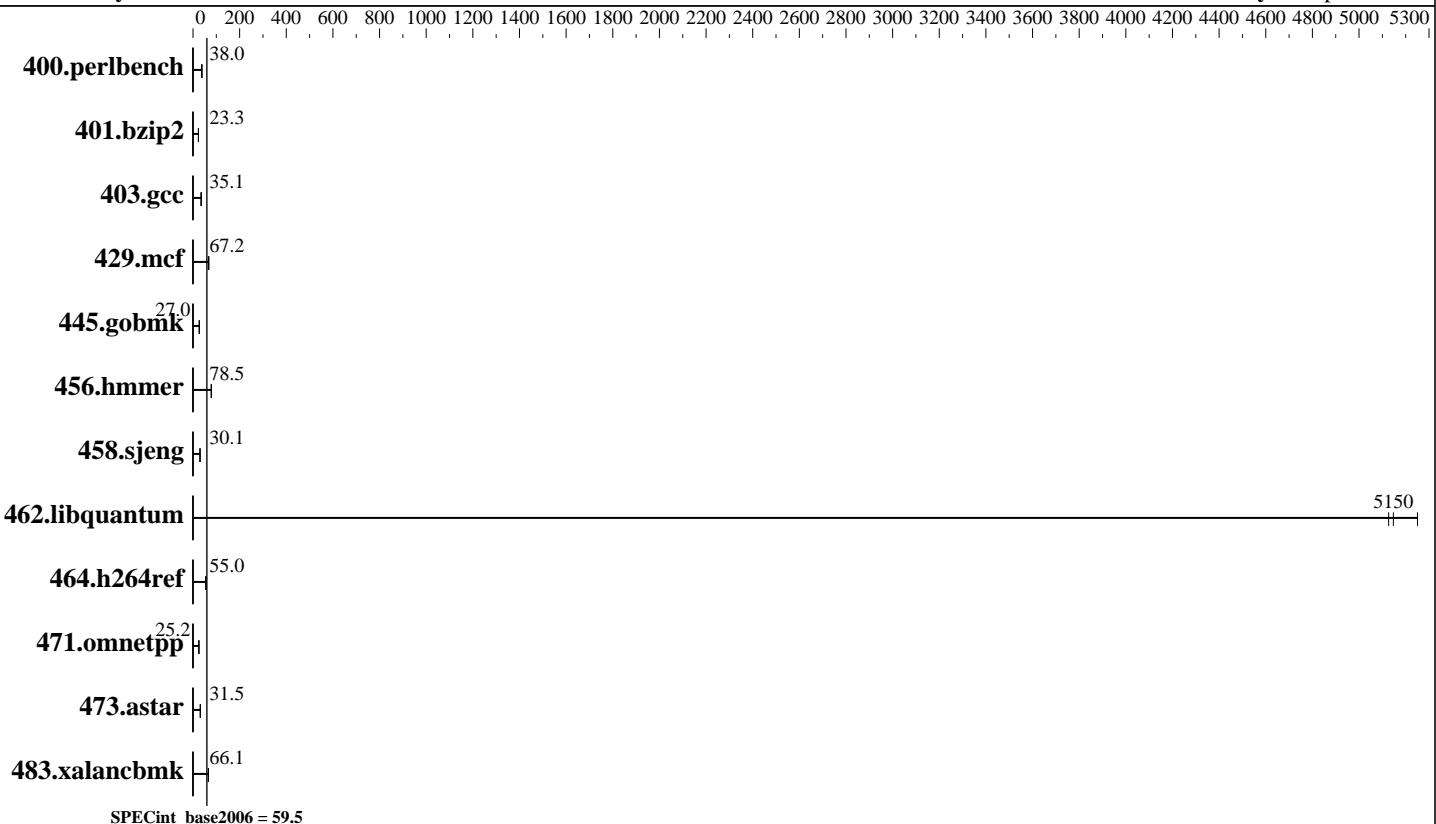

## Hardware

CPU Name: Intel Xeon Silver 4114  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 13.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: Kernel 3.10.0-514.el7.x86\_64  
 C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**59.5**

**CPU2006 license:** 3

**Test date:** Nov-2017

**Test sponsor:** HPE

**Hardware Availability:** Oct-2017

**Tested by:** HPE

**Software Availability:** Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	257	38.0	<b>257</b>	<b>38.0</b>	257	38.0						
401.bzip2	<b>414</b>	<b>23.3</b>	414	23.3	414	23.3						
403.gcc	229	35.1	230	35.0	<b>230</b>	<b>35.1</b>						
429.mcf	139	65.8	134	67.9	<b>136</b>	<b>67.2</b>						
445.gobmk	<b>388</b>	<b>27.0</b>	388	27.0	388	27.0						
456.hmmer	119	78.5	<b>119</b>	<b>78.5</b>	119	78.5						
458.sjeng	402	30.1	<b>402</b>	<b>30.1</b>	402	30.1						
462.libquantum	4.04	5130	<b>4.03</b>	<b>5150</b>	3.95	5250						
464.h264ref	403	55.0	<b>402</b>	<b>55.0</b>	401	55.2						
471.omnetpp	<b>248</b>	<b>25.2</b>	250	25.0	247	25.3						
473.astar	223	31.5	224	31.3	<b>223</b>	<b>31.5</b>						
483.xalancbmk	104	66.1	105	66.0	<b>104</b>	<b>66.1</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

IRQ balance service was stop using "service irqbalance stop"

Tuned-adm profile was set to Throughput-Performance

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Tue Nov 21 00:38:17 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**59.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:**

Oct-2017

**Software Availability:**

Apr-2017

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
        2 "physical id"s (chips)
        20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 10
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 14080 KB
```

```
From /proc/meminfo
MemTotal:      395931980 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 21 00:34
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   392G   34G  359G   9%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2400 MHz

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**59.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**59.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Nov-2017

**Hardware Availability:**

Oct-2017

**Software Availability:**

Apr-2017

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:59 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.