



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2488 V5 (Intel Xeon Gold 6128)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei


SPECrate2017_fp_base = 193

SPECrate2017_fp_peak = 198

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

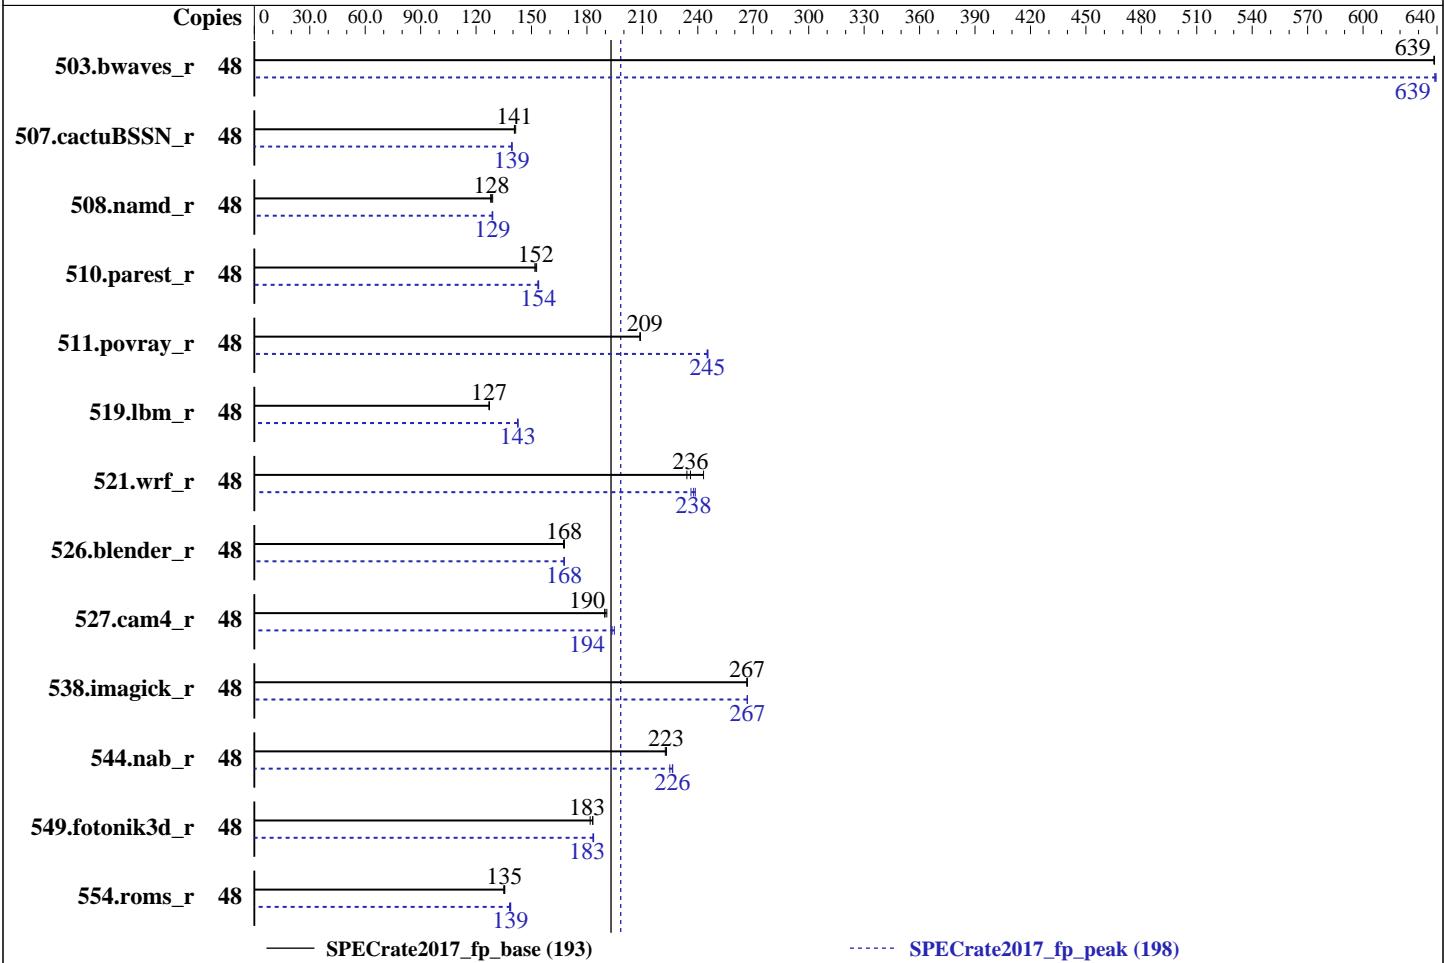

— SPECrate2017_fp_base (193)

----- SPECrate2017_fp_peak (198)

Hardware

CPU Name: Intel Xeon Gold 6128
 Max MHz.: 3700
 Nominal: 3400
 Enabled: 24 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 900 GB SAS HDD 10K RPM, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.120-92.70-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 0.80 released Feb-2018
 File System: btrfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|------------------|--------|------------|------------|-------------|------------|------------|------------|--------|------------|------------|------------|------------|-------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 48 | 754 | 638 | 754 | 639 | 754 | 639 | 48 | 753 | 639 | 753 | 639 | 753 | 640 |
| 507.cactusBSSN_r | 48 | 432 | 141 | 430 | 141 | 432 | 141 | 48 | 436 | 140 | 436 | 139 | 436 | 139 |
| 508.namd_r | 48 | 355 | 128 | 357 | 128 | 354 | 129 | 48 | 353 | 129 | 354 | 129 | 354 | 129 |
| 510.parest_r | 48 | 822 | 153 | 827 | 152 | 824 | 152 | 48 | 816 | 154 | 816 | 154 | 819 | 153 |
| 511.povray_r | 48 | 537 | 209 | 537 | 209 | 536 | 209 | 48 | 457 | 245 | 457 | 245 | 457 | 245 |
| 519.lbm_r | 48 | 398 | 127 | 398 | 127 | 398 | 127 | 48 | 354 | 143 | 355 | 142 | 355 | 143 |
| 521.wrf_r | 48 | 456 | 236 | 459 | 234 | 442 | 243 | 48 | 451 | 239 | 452 | 238 | 455 | 236 |
| 526.blender_r | 48 | 436 | 168 | 436 | 168 | 437 | 167 | 48 | 436 | 168 | 436 | 168 | 436 | 167 |
| 527.cam4_r | 48 | 440 | 191 | 442 | 190 | 443 | 190 | 48 | 434 | 194 | 434 | 193 | 431 | 195 |
| 538.imagick_r | 48 | 448 | 267 | 448 | 267 | 448 | 267 | 48 | 447 | 267 | 448 | 267 | 447 | 267 |
| 544.nab_r | 48 | 363 | 222 | 362 | 223 | 362 | 223 | 48 | 359 | 225 | 357 | 226 | 357 | 226 |
| 549.fotonik3d_r | 48 | 1029 | 182 | 1022 | 183 | 1021 | 183 | 48 | 1019 | 184 | 1021 | 183 | 1020 | 183 |
| 554.roms_r | 48 | 563 | 136 | 565 | 135 | 563 | 135 | 48 | 550 | 139 | 550 | 139 | 552 | 138 |

SPECrate2017_fp_base = 193

SPECrate2017_fp_peak = 198

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Sysinfo program /home/speccpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on guyuxin Thu Aug 9 22:07:40 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
  4 "physical id"s (chips)
  48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings : 12
physical 0: cores 2 3 4 5 10 11
physical 1: cores 0 3 4 9 12 14
physical 2: cores 0 6 9 10 11 13
physical 3: cores 0 6 9 10 11 13
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    6
Socket(s):              4
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
Stepping: 4
CPU MHz: 1400.000
CPU max MHz: 3401.0000
CPU min MHz: 1200.0000
BogoMIPS: 6799.84
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0,1,4,24,25,28
NUMA node1 CPU(s): 2,3,5,26,27,29
NUMA node2 CPU(s): 6,7,9,30,31,33
NUMA node3 CPU(s): 8,10,11,32,34,35
NUMA node4 CPU(s): 12,14,15,36,38,39
NUMA node5 CPU(s): 13,16,17,37,40,41
NUMA node6 CPU(s): 18,20,21,42,44,45
NUMA node7 CPU(s): 19,22,23,43,46,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavedec xgetbv1 cqm_llc cqm_occup_llc

/proc/cpuinfo cache data
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 4 24 25 28
node 0 size: 94798 MB
node 0 free: 89435 MB
node 1 cpus: 2 3 5 26 27 29
node 1 size: 96756 MB
node 1 free: 92738 MB
node 2 cpus: 6 7 9 30 31 33

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 2 size: 96756 MB
node 2 free: 93488 MB
node 3 cpus: 8 10 11 32 34 35
node 3 size: 96756 MB
node 3 free: 93462 MB
node 4 cpus: 12 14 15 36 38 39
node 4 size: 96756 MB
node 4 free: 93540 MB
node 5 cpus: 13 16 17 37 40 41
node 5 size: 96756 MB
node 5 free: 93534 MB
node 6 cpus: 18 20 21 42 44 45
node 6 size: 96756 MB
node 6 free: 93532 MB
node 7 cpus: 19 22 23 43 46 47
node 7 size: 96598 MB
node 7 free: 93409 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  20  20  20  20  20  20
  1: 20  10  20  20  20  20  20  20
  2: 20  20  10  20  20  20  20  20
  3: 20  20  20  10  20  20  20  20
  4: 20  20  20  20  10  20  20  20
  5: 20  20  20  20  20  10  20  20
  6: 20  20  20  20  20  20  10  20
  7: 20  20  20  20  20  20  20  10
```

From /proc/meminfo

```
MemTotal:      790460632 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux guyuxin 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Aug 9 14:26

```
SPEC is set to: /home/speccpu2017
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sda4        btrfs  697G  138G  559G  20%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.80 02/24/2018

Memory:

```
24x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2488 V5 (Intel Xeon Gold 6128)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017_fp_base = 193

SPECrate2017_fp_peak = 198

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2488 V5 (Intel Xeon Gold 6128)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017_fp_base = 193

SPECrate2017_fp_peak = 198

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

554.roms_r (continued):

-align array32byte

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 193

Huawei 2488 V5 (Intel Xeon Gold 6128)

SPECrate2017_fp_peak = 198

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-09 10:07:39-0400.

Report generated on 2018-10-31 18:13:39 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.