



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

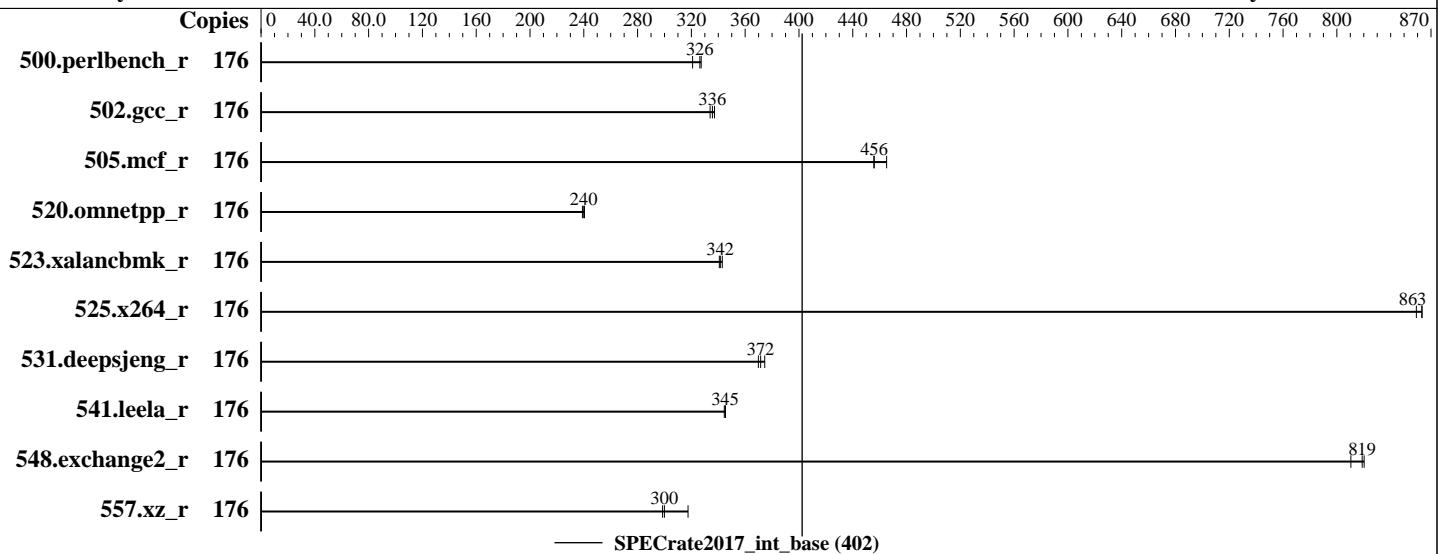

## Hardware

CPU Name: Intel Xeon Gold 6152  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 88 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 30.25 MB I+D on chip per chip  
Other: None  
Memory: 1472 GB (46 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 900 GB SAS HDD 10K RPM, RAID 0  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 0.80 released Feb-2018  
File System: btrfs  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc: jemalloc memory allocator library V5.0.1;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

**SPECrate2017\_int\_base = 402**

**Huawei 2488H V5 (Intel Xeon Gold 6152)**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	856	327	873	321	<b>859</b>	<b>326</b>									
502.gcc_r	176	<b>743</b>	<b>336</b>	739	337	746	334									
505.mcf_r	176	611	465	<b>624</b>	<b>456</b>	624	456									
520.omnetpp_r	176	<b>962</b>	<b>240</b>	966	239	960	240									
523.xalancbmk_r	176	542	343	<b>544</b>	<b>342</b>	545	341									
525.x264_r	176	359	859	357	863	<b>357</b>	<b>863</b>									
531.deepsjeng_r	176	538	375	<b>543</b>	<b>372</b>	545	370									
541.leela_r	176	844	345	<b>845</b>	<b>345</b>	846	344									
548.exchange2_r	176	<b>563</b>	<b>819</b>	569	810	562	820									
557.xz_r	176	599	318	637	299	<b>634</b>	<b>300</b>									

**SPECrate2017\_int\_base = 402**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## General Notes (Continued)

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-oyp8 Fri Jun 1 18:38:05 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz  
4 "physical id"s (chips)  
176 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22  
siblings : 44  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 176  
On-line CPU(s) list: 0-175  
Thread(s) per core: 2

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

**SPECrate2017\_int\_base = 402**

**Huawei 2488H V5 (Intel Xeon Gold 6152)**

**SPECrate2017\_int\_peak = Not Run**

**CPU2017 License:** 3175

**Test Date:** May-2018

**Test Sponsor:** Huawei

**Hardware Availability:** May-2018

**Tested by:** Huawei

**Software Availability:** Mar-2018

## Platform Notes (Continued)

```

Core(s) per socket: 22
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 1100.000
CPU max MHz: 2101.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.01
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
NUMA node1 CPU(s): 3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
NUMA node2 CPU(s): 22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
NUMA node3 CPU(s): 25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
NUMA node4 CPU(s): 44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
NUMA node5 CPU(s): 47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
NUMA node6 CPU(s): 66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
NUMA node7 CPU(s): 69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxtsw spec_ctrl stibp retrpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 30976 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106
node 0 size: 191756 MB
node 0 free: 191390 MB
node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109
node 1 size: 193524 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

```
node 1 free: 193244 MB
node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
128
node 2 size: 193524 MB
node 2 free: 193092 MB
node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
131
node 3 size: 193524 MB
node 3 free: 193287 MB
node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
150
node 4 size: 129012 MB
node 4 free: 128795 MB
node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
153
node 5 size: 193524 MB
node 5 free: 193234 MB
node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
172
node 6 size: 193524 MB
node 6 free: 193260 MB
node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
175
node 7 size: 193367 MB
node 7 free: 193130 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  20  20  20  20  20  20
  1: 20  10  20  20  20  20  20  20
  2: 20  20  10  20  20  20  20  20
  3: 20  20  20  10  20  20  20  20
  4: 20  20  20  20  10  20  20  20
  5: 20  20  20  20  20  10  20  20
  6: 20  20  20  20  20  20  10  20
  7: 20  20  20  20  20  20  20  10
```

From /proc/meminfo

MemTotal: 1517320076 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## Platform Notes (Continued)

```
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-oyf8 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 1 18:24

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        btrfs  736G   14G  721G   2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS INSYDE Corp. 0.80 02/24/2018
Memory:
2x NO DIMM NO DIMM
46x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
=====

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

541.leela\_r(base)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 548.exchange2\_r(base)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 402

Huawei 2488H V5 (Intel Xeon Gold 6152)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-qopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/jet5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-01 06:38:04-0400.

Report generated on 2018-10-31 18:21:02 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.