



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = 119**

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Dec-2018

**Hardware Availability:** Dec-2018

**Software Availability:** Apr-2018

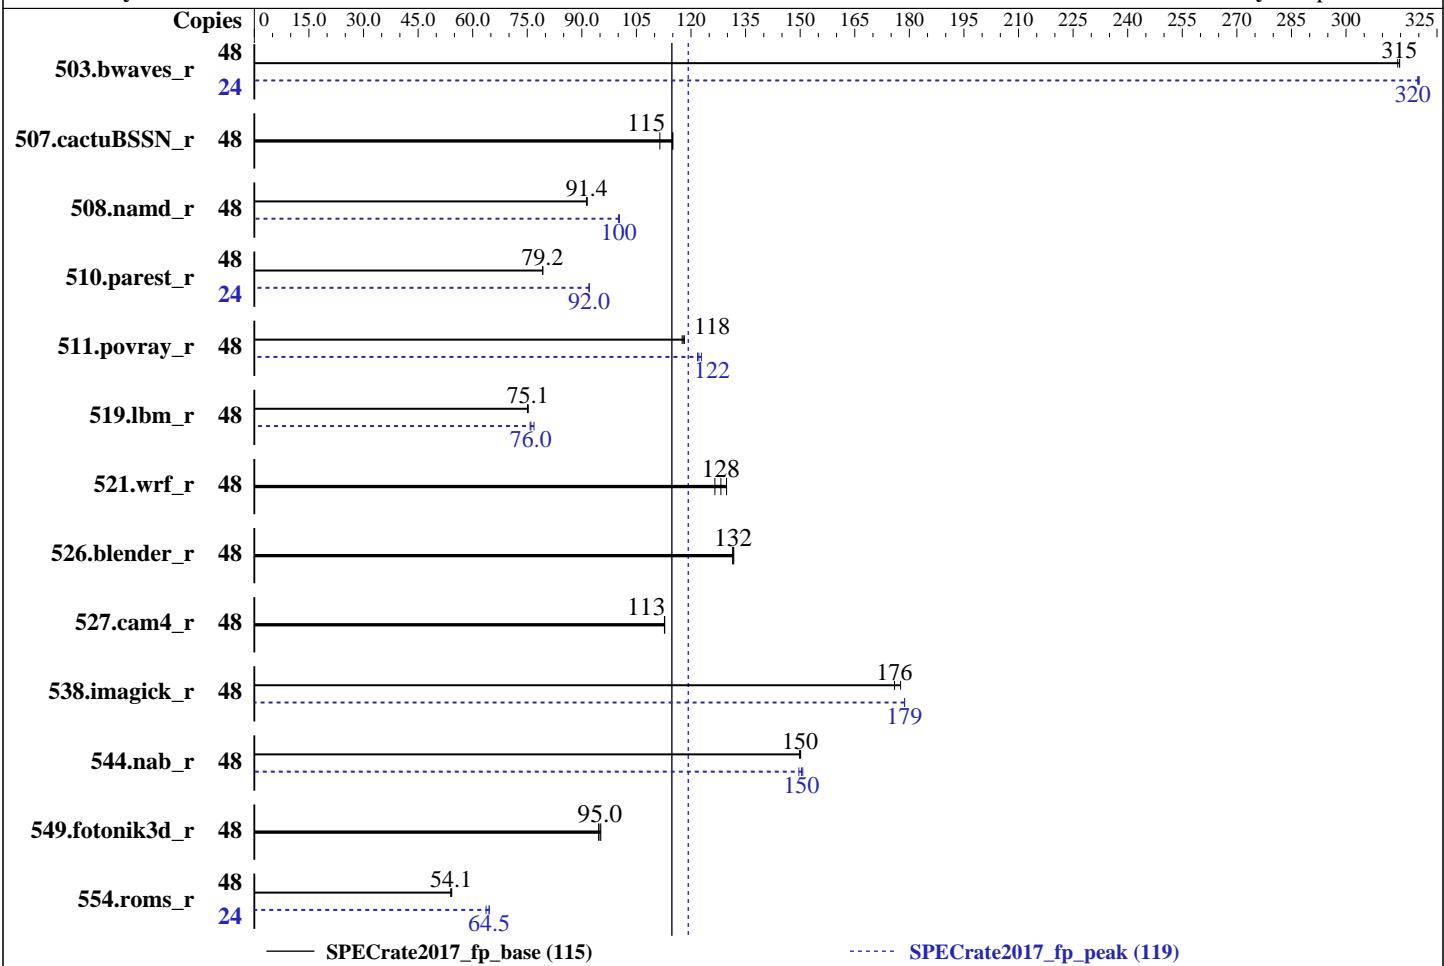

## Hardware

CPU Name: AMD EPYC 7401P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4DRx4 PC4-2667V-L)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
 Compiler: kernel 4.4.126-94.22-default  
 C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.6.7 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = 119**

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	<b>1529</b>	<b>315</b>	1532	314	1529	315	24	<b>752</b>	<b>320</b>	753	320	752	320
507.cactuBSSN_r	48	528	115	<b>529</b>	<b>115</b>	545	111	48	528	115	<b>529</b>	<b>115</b>	545	111
508.namd_r	48	<b>499</b>	<b>91.4</b>	499	91.4	499	91.3	48	<b>455</b>	<b>100</b>	455	100	454	100
510.parest_r	48	1584	79.3	<b>1585</b>	<b>79.2</b>	1586	79.2	24	<b>682</b>	<b>92.0</b>	683	92.0	682	92.1
511.povray_r	48	953	118	<b>951</b>	<b>118</b>	948	118	48	<b>918</b>	<b>122</b>	912	123	920	122
519.lbm_r	48	672	75.3	674	75.1	<b>673</b>	<b>75.1</b>	48	<b>666</b>	<b>76.0</b>	668	75.8	658	76.9
521.wrf_r	48	850	127	<b>839</b>	<b>128</b>	829	130	48	850	127	<b>839</b>	<b>128</b>	829	130
526.blender_r	48	<b>556</b>	<b>132</b>	555	132	556	131	48	<b>556</b>	<b>132</b>	555	132	556	131
527.cam4_r	48	745	113	744	113	<b>745</b>	<b>113</b>	48	745	113	744	113	<b>745</b>	<b>113</b>
538.imagick_r	48	672	178	679	176	<b>679</b>	<b>176</b>	48	668	179	<b>668</b>	<b>179</b>	668	179
544.nab_r	48	538	150	539	150	<b>539</b>	<b>150</b>	48	536	151	<b>537</b>	<b>150</b>	540	150
549.fotonik3d_r	48	<b>1969</b>	<b>95.0</b>	1965	95.2	1977	94.6	48	<b>1969</b>	<b>95.0</b>	1965	95.2	1977	94.6
554.roms_r	48	1406	54.3	<b>1411</b>	<b>54.1</b>	1413	54.0	24	591	64.6	599	63.7	<b>591</b>	<b>64.5</b>

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = 119**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1704-rate-libs-revD/64;/home/cpu2017-1.0.5/amd1704-rate-libs-revD/32;"  
MALLOC_CONF = "lg_chunk:28"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5

in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

jemalloc uses environment variable MALLOC\_CONF

with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to  $2^{21}$  = 2MiB.

## Platform Notes

BIOS settings:

Memory Interleaving set to Channel Interleaving

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 115

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_fp\_peak = 119

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```
C States set to Autonomous  
Memory Patrol Scrub disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management disabled  
Determinism Slider set to Power Determinism  
Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-j270 Wed Dec 12 00:42:48 2018
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7401P 24-Core Processor  
    1 "physical id"s (chips)  
    48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
    cpu cores : 24  
    siblings : 48  
    physical 0: cores 0 1 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Byte Order:            Little Endian  
CPU(s):                48  
On-line CPU(s) list:   0-47  
Thread(s) per core:    2  
Core(s) per socket:    24  
Socket(s):             1  
NUMA node(s):          4  
Vendor ID:             AuthenticAMD  
CPU family:            23  
Model:                 1  
Model name:            AMD EPYC 7401P 24-Core Processor  
Stepping:               2  
CPU MHz:                1996.198  
BogoMIPS:              3992.39  
Virtualization:        AMD-V  
L1d cache:             32K  
L1i cache:             64K  
L2 cache:              512K  
L3 cache:              8192K  
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44  
NUMA node1 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmil avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 128621 MB
node 0 free: 128446 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 129018 MB
node 1 free: 128860 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 129018 MB
node 2 free: 128844 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 129017 MB
node 3 free: 128841 MB
node distances:
node   0   1   2   3
  0: 10 16 16 16
  1: 16 10 16 16
  2: 16 16 10 16
  3: 16 16 16 10
```

```
From /proc/meminfo
MemTotal:      528052476 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 115

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_fp\_peak = 119

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 3  
  # This file is deprecated and will be removed in a future service pack or release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP3"  
  VERSION_ID="12.3"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:  
  Linux linux-j270 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)  
  x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB
```

run-level 3 Dec 11 14:14

```
SPEC is set to: /home/cpu2017-1.0.5  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda4        xfs   405G   16G  389G   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.6.7 10/29/2018

Memory:

```
 8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666  
 8x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

FC 507.cactusBSSN\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base,  
peak)  
=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lso-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs  
-ljemalloc

C++ benchmarks:

-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lso-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-z muldefs -ljemalloc

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -mavx -madx -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -mavx -madx  
-funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -mavx -madx -funroll-loops -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

```
clang gfortran
```

Benchmarks using both Fortran and C:

```
clang gfortran
```

Benchmarks using both C and C++:

```
clang++ clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang gfortran
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx  
-funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = 119

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -fpto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive  
-ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-12 01:42:47-0500.

Report generated on 2019-01-22 16:48:11 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.