



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003


Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

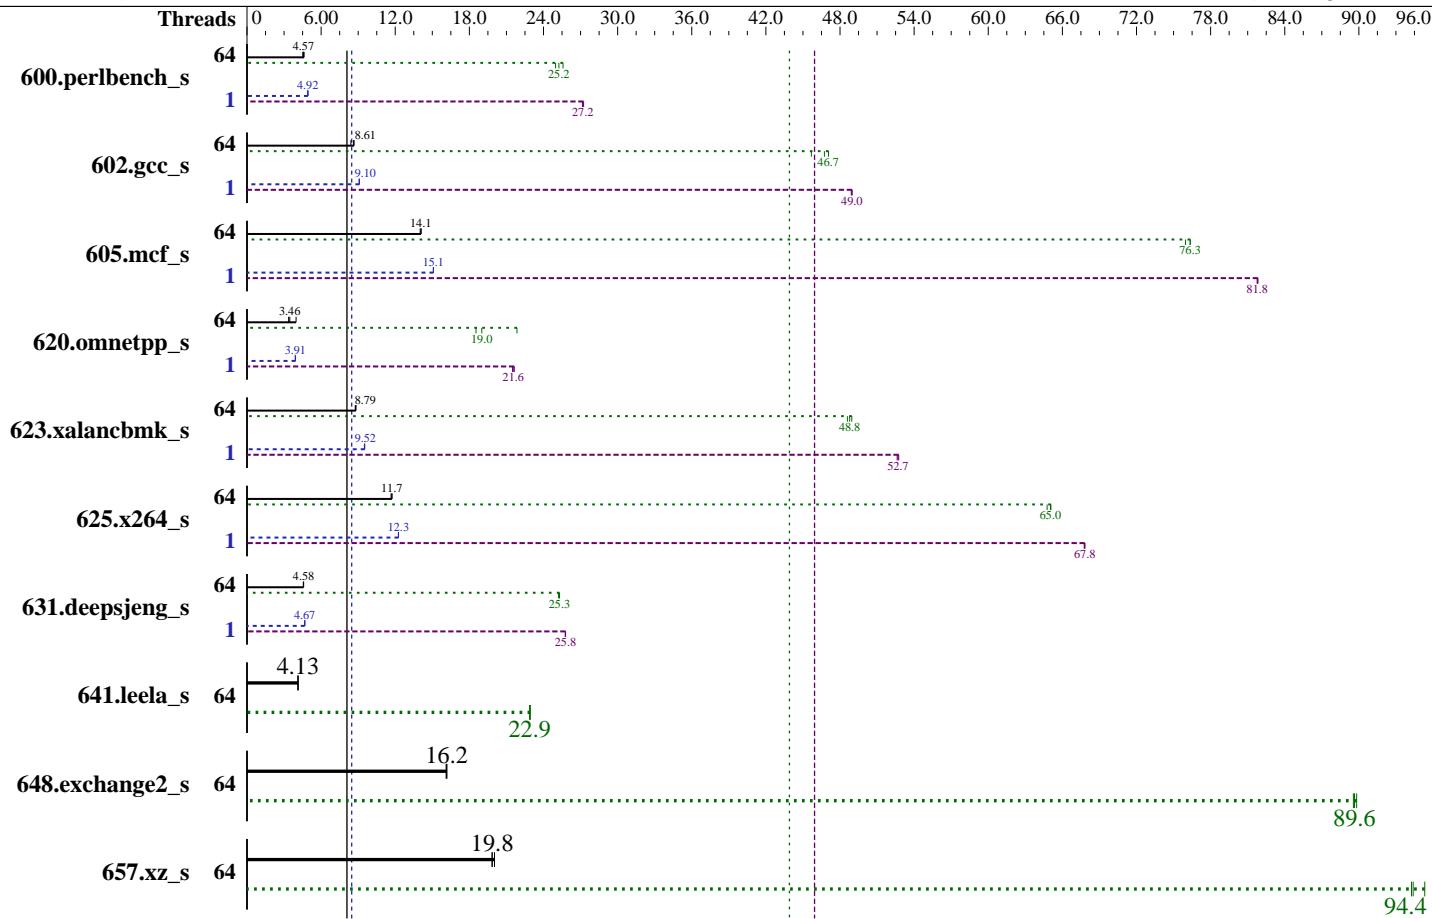

Hardware		Software	
CPU Name:	AMD EPYC 7702P	OS:	SUSE Linux Enterprise Server 15 (x86_64) SP1
Max MHz:	3350	Compiler:	Kernel 4.12.14-195-default
Nominal:	2000	Parallel:	C/C++/Fortran: Version 2.0.0 of AOCC
Enabled:	64 cores, 1 chip	Firmware:	Yes
Orderable:	1 chip	File System:	HPE BIOS Version A41 07/20/2019 released Aug-2019
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	btrfs
L2:	512 KB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores	Peak Pointers:	64-bit
Other:	None	Other:	32/64-bit
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2933Y-L)	Power Management:	jemalloc: jemalloc memory allocator library v5.2.0
Storage:	1 x HPE 480 GB SATA 6G SSD		
Other:	None		



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Power

Max. Power (W): 368.6

Idle Power (W): 189.94

Min. Temperature (C): 20.44

Elevation (m): 132

Line Standard: 208 V / 60 Hz / 1 phase / 2 wires

Provisioning: Line-powered

Power Settings

Management FW: Version 1.43 of iLO5 released May 23 2019

Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 800 W (non-redundant)
 Details: HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (865438-B21)

Backplane: 8 SFF NVMe with optional optical drive
 Other Storage: Embedded SATA Controller
 Storage Model #s: P05976-B21
 NICs Installed: 1 x HPE Ethernet 4-port 331i Adapter @ 1 Gb
 NICs Enabled (FW/OS): 4 / 4
 NICs Connected/Speed: 2 @ 1 Gb
 Other HW Model #s: 7 x High Performance fans

Power Analyzer

Power Analyzer: 10.216.1.15:8888
 Hardware Vendor: Yokogawa
 Model: YokogawaWT210
 Serial Number: 91K308562
 Input Connection: GPIB via NI GIPB-USB-HS
 Metrology Institute: NIST
 Calibration By: TRANSCAT
 Calibration Label: 5-E553M-20-1
 Calibration Date: 21-May-2019
 PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)
 Setup Description: SUT Power Supply 1 via neoXt NXB 20815
 Current Ranges Used: 1A, 2A
 Voltage Range Used: 300V

Temperature Meter

Temperature Meter: 10.216.1.15:8889
 Hardware Vendor: Digi International Inc.
 Model: DigiWATCHPORT_H
 Serial Number: V45297862
 Input Connection: USB
 PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)
 Setup Description: 5 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	64	393	4.51	77.1	25.0	196	204	384	4.62	75.3	25.6	196	204	389	4.57	76.3	25.2	196	203
602.gcc_s	64	459	8.67	92.0	47.1	200	222	462	8.61	92.6	46.7	200	223	473	8.41	94.7	45.7	200	223
605.mcf_s	64	335	14.1	67.5	76.3	201	226	335	14.1	67.5	76.4	201	227	337	14.0	67.8	76.0	201	227
620.omnetpp_s	64	471	3.46	93.4	19.0	198	200	411	3.97	81.2	21.9	198	199	484	3.37	95.7	18.5	198	199
623.xalancbmk_s	64	161	8.82	31.4	49.0	196	197	161	8.79	31.5	48.8	196	197	162	8.76	31.7	48.6	196	198
625.x264_s	64	151	11.7	29.6	64.8	196	197	150	11.7	29.5	65.0	196	198	150	11.7	29.5	65.1	196	197
631.deepsjeng_s	64	314	4.56	61.8	25.2	196	214	313	4.58	61.6	25.3	197	212	313	4.58	61.6	25.3	197	215
641.leela_s	64	413	4.13	80.6	22.9	195	196	413	4.13	80.7	22.9	195	197	413	4.13	80.7	22.9	195	197
648.exchange2_s	64	182	16.2	35.6	89.8	196	197	182	16.1	35.7	89.6	196	197	182	16.2	35.7	89.6	196	197
657.xz_s	64	309	20.0	70.6	95.3	229	369	311	19.8	71.3	94.4	229	367	312	19.8	71.4	94.3	229	367

SPECspeed®2017_int_base = **8.09**

SPECspeed®2017_int_energy_base = **43.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	1	361	4.91	70.9	27.1	196	204	<u>361</u>	<u>4.92</u>	<u>70.8</u>	<u>27.2</u>	<u>196</u>	<u>205</u>	360	4.93	70.7	27.2	196	204
602.gcc_s	1	438	9.10	88.4	49.0	202	223	438	9.08	88.5	48.9	202	223	438	9.10	88.4	49.0	202	223
605.mcf_s	1	313	15.1	63.0	81.8	201	226	313	15.1	62.9	81.8	201	225	<u>313</u>	<u>15.1</u>	<u>63.0</u>	<u>81.8</u>	<u>201</u>	<u>225</u>
620.omnetpp_s	1	417	3.91	82.6	21.5	198	199	415	3.93	82.0	21.6	198	198	417	3.91	82.3	21.6	198	199
623.xalancbmk_s	1	149	9.53	29.2	52.8	196	197	149	9.50	29.2	52.6	196	197	149	9.52	29.2	52.7	196	197
625.x264_s	1	144	12.3	28.3	67.8	197	198	144	12.3	28.3	67.8	197	198	144	12.3	28.3	67.8	197	198
631.deepsjeng_s	1	306	4.68	60.4	25.8	197	220	307	4.67	60.5	25.8	197	216	307	4.67	60.4	25.8	197	222
641.leela_s	64	413	4.13	80.6	22.9	195	196	413	4.13	80.7	22.9	195	197	413	4.13	80.7	22.9	195	197
648.exchange2_s	64	182	16.2	35.6	89.8	196	197	182	16.1	35.7	89.6	196	197	182	16.2	35.7	89.6	196	197
657.xz_s	64	309	20.0	70.6	95.3	229	369	<u>311</u>	<u>19.8</u>	<u>71.3</u>	<u>94.4</u>	<u>229</u>	<u>367</u>	312	19.8	71.4	94.3	229	367

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-63"

LD_LIBRARY_PATH =

 "/cpu2017/amd_speed_aocc200_rome_C_lib/64;/cpu2017/amd_speed_aocc200_rom
 e_C_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

General Notes (Continued)

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 00:02:18 EDT 2019

Submission: cpu2017-20190903-17799.sub

Submitted_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue Sep 17 09:00:11 EDT 2019

Submission: cpu2017-20190903-17799.sub

Platform Notes

BIOS Configuration:

AMD SMT Option set to Disabled

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

NUMA memory domains per socket set to Four memory domains per socket

Workload Profile set to General Peak Frequency Compute

Minimum Processor Idle Power Core C-State set to C6 State

Sysinfo program /cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on dl325gen10 Sat Aug 31 14:01:49 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7702P 64-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Platform Notes (Continued)

53 54 55 56 57 58 59 60 61 62 63

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7702P 64-Core Processor
Stepping: 0
CPU MHz: 2000.000
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3992.33
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
NUMA node2 CPU(s): 32-47
NUMA node3 CPU(s): 48-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperf fm perf pnpi pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavenc xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64290 MB
node 0 free: 64038 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 64507 MB
node 1 free: 64350 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 2 size: 64507 MB
node 2 free: 64245 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
node 3 size: 64465 MB
node 3 free: 64353 MB
node distances:
node   0   1   2   3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      263958144 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux dl325gen10 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling

run-level 3 Aug 31 13:56

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	40G	11G	29G	28%	/

From /sys/devices/virtual/dmi/id

 BIOS: HPE A41 07/20/2019

 Vendor: HPE

 Product: ProLiant DL325 Gen10

 Product Family: ProLiant

 Serial: CN781302PS

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

 8x UNKNOWN NOT AVAILABLE

 8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

Power Settings Notes

PTDaemon to measure power and temperature was run on a ProLiant DL360 Gen9 as a controller with 2x Intel Xeon E5-2660 v3 CPU and 128 GB of memory using Windows Server 2012 R2.

Power management in the OS was disabled by setting Linux CPU governor to performance for all cores: cpupower frequency-set -r -g performance

Power management in the BIOS was default except for any settings mentioned in BIOS Configuration. No power management settings were set in the management firmware.

The optional optical drive was not installed.

The system was configured with 7 HPE Small Form Factor Hard Drive Blanks (666987-B21), 8 DIMM blanks 2 high performance heatsinks and baffles that fit over the high performance

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Power Settings Notes (Continued)

heatsinks in order to produce correct airflow and cooling.

The run was started and observed through the management firmware.

The Embedded SATA controller was the HPE Smart Array S100i SR Gen10 SW RAID.

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 623.xalancbmk_s(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 623.xalancbmk_s(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran | 648.exchange2_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_S: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Base Portability Flags (Continued)

605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-flang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Peak Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-fvl-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-fvl-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc

605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

605.mcf_s (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp  
-lpthread -ldl -ljemalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-lmvec -lamdlibm -ljemalloc -lflang
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECspeed®2017_int_base = 8.09

SPECspeed®2017_int_energy_base = 43.9

SPECspeed®2017_int_peak = 8.47

SPECspeed®2017_int_energy_peak = 45.9

CPU2017 License: 003

Test Date: Aug-2019

Test Sponsor: HPE

Hardware Availability: Oct-2019

Tested by: HPE

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

-ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk_s: -Wno-return-type

-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revF.xml>

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-08-31 15:01:47-0400.

Report generated on 2019-09-17 16:19:32 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.