



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 480

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

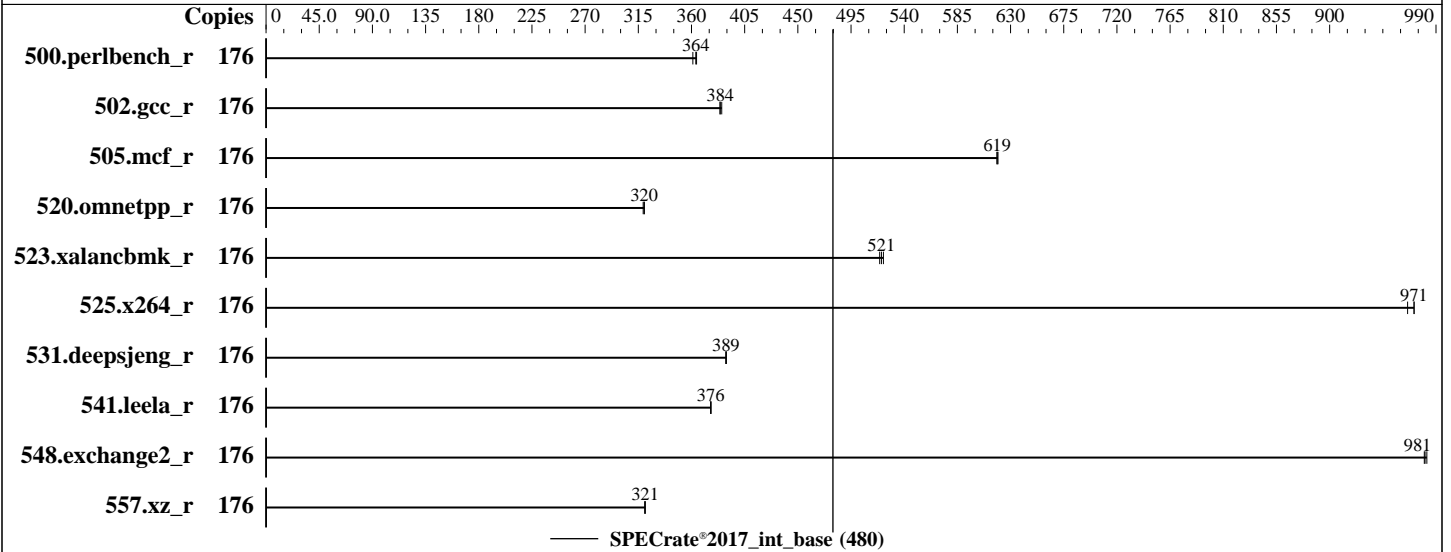

Hardware

CPU Name: Intel Xeon Gold 6238
 Max MHz: 3700
 Nominal: 2100
 Enabled: 88 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 30.25 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version IVE142E 2.30 released Aug-2019
 tested as IVE141E 2.30 Jul-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_base = 480

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	769	364	776	361	<u>771</u>	<u>364</u>							
502.gcc_r	176	649	384	<u>648</u>	<u>384</u>	646	386							
505.mcf_r	176	460	618	459	619	<u>460</u>	<u>619</u>							
520.omnetpp_r	176	<u>722</u>	<u>320</u>	721	320	724	319							
523.xalancbmk_r	176	356	522	358	519	<u>357</u>	<u>521</u>							
525.x264_r	176	<u>317</u>	<u>971</u>	319	966	317	971							
531.deepsjeng_r	176	<u>518</u>	<u>389</u>	518	390	518	389							
541.leela_r	176	<u>774</u>	<u>376</u>	775	376	774	377							
548.exchange2_r	176	469	982	470	980	<u>470</u>	<u>981</u>							
557.xz_r	176	592	321	593	320	<u>593</u>	<u>321</u>							

SPECrate®2017_int_base = 480

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 480

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

- NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
Trusted Execution Technology set to Enable
SNC set to Enable
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-qc6q Sun Sep 8 03:32:28 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
4 "physical id"s (chips)
176 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 480

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Platform Notes (Continued)

```

CPU(s): 176
On-line CPU(s) list: 0-175
Thread(s) per core: 2
Core(s) per socket: 22
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
NUMA node1 CPU(s): 3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
NUMA node2 CPU(s): 22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
NUMA node3 CPU(s): 25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
NUMA node4 CPU(s): 44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
NUMA node5 CPU(s): 47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
NUMA node6 CPU(s): 66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
NUMA node7 CPU(s): 69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_lld arch_capabilities

```

/proc/cpuinfo cache data
cache size : 30976 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 480

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Platform Notes (Continued)

```

node 0 size: 193134 MB
node 0 free: 184240 MB
node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109
node 1 size: 193526 MB
node 1 free: 188787 MB
node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
128
node 2 size: 193526 MB
node 2 free: 193261 MB
node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
131
node 3 size: 193526 MB
node 3 free: 193216 MB
node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
150
node 4 size: 193526 MB
node 4 free: 193283 MB
node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
153
node 5 size: 193526 MB
node 5 free: 193238 MB
node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
172
node 6 size: 193497 MB
node 6 free: 193252 MB
node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
175
node 7 size: 193523 MB
node 7 free: 193257 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 11 21 21 21 21 21 21
1: 11 10 21 21 21 21 21 21
2: 21 21 10 11 21 21 21 21
3: 21 21 11 10 21 21 21 21
4: 21 21 21 21 10 11 21 21
5: 21 21 21 21 11 10 21 21
6: 21 21 21 21 21 21 10 11
7: 21 21 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal: 1584936092 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_base = 480

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Platform Notes (Continued)

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-qcqc6 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Sep 8 03:30
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    800G   8.3G  792G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[IVE141E-2.30]- 07/02/2019
Memory:
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 480

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017_int_base = 480

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-07 15:32:27-0400.

Report generated on 2019-10-01 14:27:01 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.