



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55


Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

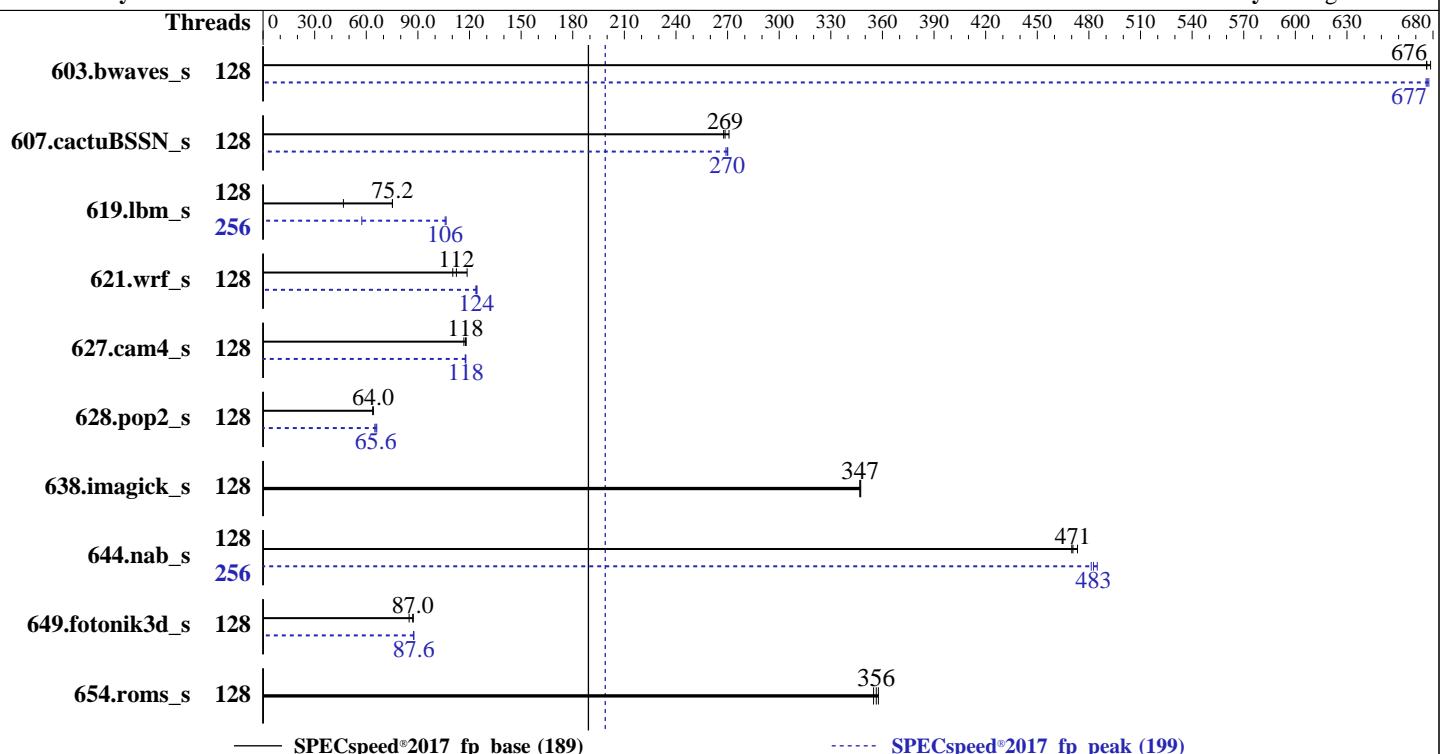

Hardware		Software	
CPU Name:	AMD EPYC 7742	OS:	SUSE Linux Enterprise Server 15 SP1
Max MHz:	3400		kernel 4.12.14-195-default
Nominal:	2250	Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Enabled:	128 cores, 2 chips, 2 threads/core	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Version 0.4.10 released Aug-2019
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	512 KB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)	Other:	jemalloc: jemalloc memory allocator library v5.1.0
Storage:	1 x 960 GB SAS SSD	Power Management:	--
Other:	None		



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2019
Hardware Availability: Oct-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	86.9	679	87.2	676	87.2	676	128	87.2	677	87.3	676	87.1	678
607.cactuBSSN_s	128	62.3	268	61.5	271	62.1	269	128	61.8	270	62.0	269	61.7	270
619.lbm_s	128	69.7	75.2	69.6	75.2	112	46.7	256	91.3	57.4	49.5	106	49.2	106
621.wrf_s	128	120	110	118	112	112	119	128	107	124	106	124	107	124
627.cam4_s	128	75.1	118	75.9	117	75.3	118	128	75.2	118	75.4	117	75.3	118
628.pop2_s	128	186	64.0	186	63.8	185	64.0	128	180	66.1	181	65.6	183	65.0
638.imagick_s	128	41.5	347	41.6	347	41.6	347	128	41.5	347	41.6	347	41.6	347
644.nab_s	128	36.9	473	37.2	470	37.1	471	256	36.3	481	36.2	483	36.0	485
649.fotonik3d_s	128	104	87.3	107	84.9	105	87.0	128	104	87.6	104	87.6	104	87.4
654.roms_s	128	44.4	355	44.2	356	44.0	358	128	44.4	355	44.2	356	44.0	358
SPECSpeed®2017_fp_base = 189							SPECSpeed®2017_fp_peak = 199							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

General Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"  
LD_LIBRARY_PATH = "/root/cpu2017-1.0.5/amd_speed_aocc200_rome_B_lib/64;  
/root/cpu2017-1.0.5/amd_speed_aocc200_rome_B_lib/32;"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "256"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -f1to
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

```
NUMA Nodes Per Socket set to 4  
CCX as NUMA Domain set to Enabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost Enabled  
Cstates set to Enabled  
Memory Patrol Scrub Disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management Disabled  
Determinism Slider set to Power Determinism  
Efficiency Optimized Mode Disabled  
Sysinfo program /root/cpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-g3ob Mon Sep 2 11:08:47 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/cpuinfo

```
model name : AMD EPYC 7742 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          32
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7742 64-Core Processor
Stepping:               0
CPU MHz:                2245.768
BogoMIPS:              4491.53
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):     0-3,128-131
NUMA node1 CPU(s):     4-7,132-135
NUMA node2 CPU(s):     8-11,136-139
NUMA node3 CPU(s):     12-15,140-143
NUMA node4 CPU(s):     16-19,144-147
NUMA node5 CPU(s):     20-23,148-151
NUMA node6 CPU(s):     24-27,152-155
NUMA node7 CPU(s):     28-31,156-159
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node8 CPU(s): 32-35,160-163
NUMA node9 CPU(s): 36-39,164-167
NUMA node10 CPU(s): 40-43,168-171
NUMA node11 CPU(s): 44-47,172-175
NUMA node12 CPU(s): 48-51,176-179
NUMA node13 CPU(s): 52-55,180-183
NUMA node14 CPU(s): 56-59,184-187
NUMA node15 CPU(s): 60-63,188-191
NUMA node16 CPU(s): 64-67,192-195
NUMA node17 CPU(s): 68-71,196-199
NUMA node18 CPU(s): 72-75,200-203
NUMA node19 CPU(s): 76-79,204-207
NUMA node20 CPU(s): 80-83,208-211
NUMA node21 CPU(s): 84-87,212-215
NUMA node22 CPU(s): 88-91,216-219
NUMA node23 CPU(s): 92-95,220-223
NUMA node24 CPU(s): 96-99,224-227
NUMA node25 CPU(s): 100-103,228-231
NUMA node26 CPU(s): 104-107,232-235
NUMA node27 CPU(s): 108-111,236-239
NUMA node28 CPU(s): 112-115,240-243
NUMA node29 CPU(s): 116-119,244-247
NUMA node30 CPU(s): 120-123,248-251
NUMA node31 CPU(s): 124-127,252-255
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtTopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibr skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_13 cdp_13 hw_pstate sme ssbd sev ibrp ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)
node 0 cpus: 0 1 2 3 128 129 130 131
node 0 size: 15691 MB
node 0 free: 15603 MB
node 1 cpus: 4 5 6 7 132 133 134 135

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2019
Hardware Availability: Oct-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
node 1 size: 16126 MB
node 1 free: 16104 MB
node 2 cpus: 8 9 10 11 136 137 138 139
node 2 size: 16126 MB
node 2 free: 16106 MB
node 3 cpus: 12 13 14 15 140 141 142 143
node 3 size: 16125 MB
node 3 free: 16104 MB
node 4 cpus: 16 17 18 19 144 145 146 147
node 4 size: 16126 MB
node 4 free: 16106 MB
node 5 cpus: 20 21 22 23 148 149 150 151
node 5 size: 16126 MB
node 5 free: 16107 MB
node 6 cpus: 24 25 26 27 152 153 154 155
node 6 size: 16126 MB
node 6 free: 16108 MB
node 7 cpus: 28 29 30 31 156 157 158 159
node 7 size: 16125 MB
node 7 free: 16105 MB
node 8 cpus: 32 33 34 35 160 161 162 163
node 8 size: 16126 MB
node 8 free: 16076 MB
node 9 cpus: 36 37 38 39 164 165 166 167
node 9 size: 16126 MB
node 9 free: 16100 MB
node 10 cpus: 40 41 42 43 168 169 170 171
node 10 size: 16126 MB
node 10 free: 16106 MB
node 11 cpus: 44 45 46 47 172 173 174 175
node 11 size: 16125 MB
node 11 free: 16106 MB
node 12 cpus: 48 49 50 51 176 177 178 179
node 12 size: 16126 MB
node 12 free: 16069 MB
node 13 cpus: 52 53 54 55 180 181 182 183
node 13 size: 16126 MB
node 13 free: 16108 MB
node 14 cpus: 56 57 58 59 184 185 186 187
node 14 size: 16126 MB
node 14 free: 16108 MB
node 15 cpus: 60 61 62 63 188 189 190 191
node 15 size: 16113 MB
node 15 free: 16093 MB
node 16 cpus: 64 65 66 67 192 193 194 195
node 16 size: 16126 MB
node 16 free: 16046 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

```
node 17 cpus: 68 69 70 71 196 197 198 199
node 17 size: 16126 MB
node 17 free: 16099 MB
node 18 cpus: 72 73 74 75 200 201 202 203
node 18 size: 16126 MB
node 18 free: 16024 MB
node 19 cpus: 76 77 78 79 204 205 206 207
node 19 size: 16125 MB
node 19 free: 16064 MB
node 20 cpus: 80 81 82 83 208 209 210 211
node 20 size: 16126 MB
node 20 free: 16094 MB
node 21 cpus: 84 85 86 87 212 213 214 215
node 21 size: 16126 MB
node 21 free: 16102 MB
node 22 cpus: 88 89 90 91 216 217 218 219
node 22 size: 16126 MB
node 22 free: 16107 MB
node 23 cpus: 92 93 94 95 220 221 222 223
node 23 size: 16125 MB
node 23 free: 15966 MB
node 24 cpus: 96 97 98 99 224 225 226 227
node 24 size: 16126 MB
node 24 free: 16107 MB
node 25 cpus: 100 101 102 103 228 229 230 231
node 25 size: 16126 MB
node 25 free: 16108 MB
node 26 cpus: 104 105 106 107 232 233 234 235
node 26 size: 16096 MB
node 26 free: 16078 MB
node 27 cpus: 108 109 110 111 236 237 238 239
node 27 size: 16125 MB
node 27 free: 16105 MB
node 28 cpus: 112 113 114 115 240 241 242 243
node 28 size: 16126 MB
node 28 free: 16105 MB
node 29 cpus: 116 117 118 119 244 245 246 247
node 29 size: 16126 MB
node 29 free: 16107 MB
node 30 cpus: 120 121 122 123 248 249 250 251
node 30 size: 16126 MB
node 30 free: 16105 MB
node 31 cpus: 124 125 126 127 252 253 254 255
node 31 size: 16122 MB
node 31 free: 16104 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12	
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
27:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
28:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
29:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	11	10	10	11	11	11	11	11	11	11	11	11	11	11	11	11
30:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	11	11	11	10	10	11	11	11	11	11	11	11	11	11	11	11
31:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	11	11	11	10	10	11	11	11	11	11	11	11	11	11	11	11

From /proc/meminfo

```
MemTotal:      527930320 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Aug 30 10:58

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Platform Notes (Continued)

SPEC is set to: /root/cpu2017-1.0.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	440G	20G	421G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.10 08/28/2019

Memory:

16x 802C869D802C 36ASF4G72PZ-3G2E2	32 GB	2 rank	3200
16x Not Specified	Not Specified		

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
	654.roms_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran, C	621.wrf_s(base, peak) 627.cam4_s(base, peak)
	628.pop2_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-fvl-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-fvl-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_base = 189

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread  
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_fp_base = 189

SPECspeed®2017_fp_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Oct-2019

Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp  
-lpthread -ldl -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: Same as 619.lbm_s

Fortran benchmarks:

```
603.bwaves_s: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver2 -funroll-loops -Mrecursive  
-mllvm -vector-library=LIBMVEC -Kieee  
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

```
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang
```

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee  
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000  
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only  
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread  
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 189

PowerEdge R6525 (AMD EPYC 7742, 2.25 GHz)

SPECSpeed®2017_fp_peak = 199

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE4.2019-10-15.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE4.2019-10-15.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-02 11:08:47-0400.

Report generated on 2019-10-15 14:43:30 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.