



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2020

Hardware Availability: Jan-2020

Software Availability: Nov-2019

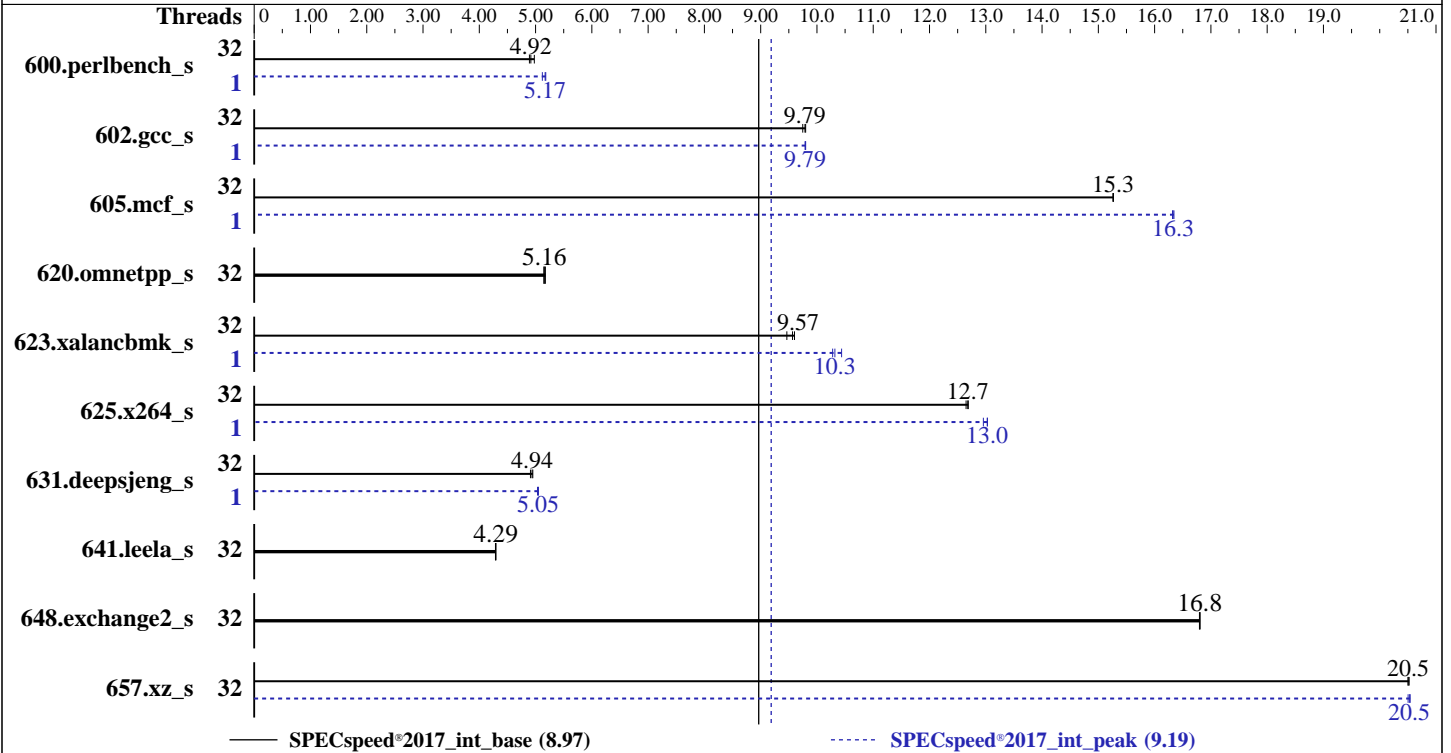

### Hardware

CPU Name: AMD EPYC 7542  
 Max MHz: 3400  
 Nominal: 2900  
 Enabled: 32 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1 (Ootpa)  
 Kernel 4.18.0-147.el8.x86\_64  
 C/C++/Fortran: Version 2.0.0 of AOCC  
 Compiler: Yes  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CFE1070 released Dec-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Feb-2020  
Hardware Availability: Jan-2020  
Software Availability: Nov-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	357	4.98	<b><u>361</u></b>	<b><u>4.92</u></b>	363	4.89	1	<b><u>343</u></b>	<b><u>5.17</u></b>	343	5.18	347	5.12
602.gcc_s	32	409	9.75	<b><u>407</u></b>	<b><u>9.79</u></b>	406	9.80	1	<b><u>407</u></b>	<b><u>9.79</u></b>	406	9.80	407	9.79
605.mcf_s	32	309	15.3	<b><u>309</u></b>	<b><u>15.3</u></b>	309	15.3	1	<b><u>289</u></b>	<b><u>16.3</u></b>	289	16.3	289	16.3
620.omnetpp_s	32	317	5.15	<b><u>316</u></b>	<b><u>5.16</u></b>	315	5.17	32	317	5.15	<b><u>316</u></b>	<b><u>5.16</u></b>	315	5.17
623.xalancbmk_s	32	<b><u>148</u></b>	<b><u>9.57</u></b>	148	9.60	150	9.46	1	138	10.3	<b><u>137</u></b>	<b><u>10.3</u></b>	136	10.4
625.x264_s	32	139	12.6	139	12.7	<b><u>139</u></b>	<b><u>12.7</u></b>	1	<b><u>135</u></b>	<b><u>13.0</u></b>	136	13.0	135	13.0
631.deepsjeng_s	32	289	4.95	292	4.91	<b><u>290</u></b>	<b><u>4.94</u></b>	1	285	5.03	<b><u>284</u></b>	<b><u>5.05</u></b>	284	5.05
641.leela_s	32	<b><u>397</u></b>	<b><u>4.29</u></b>	397	4.29	398	4.29	32	<b><u>397</u></b>	<b><u>4.29</u></b>	397	4.29	398	4.29
648.exchange2_s	32	<b><u>175</u></b>	<b><u>16.8</u></b>	175	16.8	175	16.8	32	<b><u>175</u></b>	<b><u>16.8</u></b>	175	16.8	175	16.8
657.xz_s	32	302	20.5	301	20.5	<b><u>301</u></b>	<b><u>20.5</u></b>	32	301	20.5	<b><u>301</u></b>	<b><u>20.5</u></b>	301	20.5

SPECspeed®2017\_int\_base = **8.97**

SPECspeed®2017\_int\_peak = **9.19**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Nov-2019

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH =  
  "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd\_speed\_aocc200\_rome\_C\_lib/64  
  ;/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd\_speed\_aocc200\_rome\_C\_lib/32  
  :"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"  
OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

- NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Nov-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fltto  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS settings:  
Set Operating Mode set to Maximum Performance  
SMT Mode set to Disabled  
NUMA nodes per socket set to NPS4

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Tue Feb 25 19:49:56 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7542 32-Core Processor  
1 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 1  
Core(s) per socket: 32  
Socket(s): 1  
NUMA node(s): 4  
Vendor ID: AuthenticAMD  
CPU family: 23

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2020

Hardware Availability: Jan-2020

Software Availability: Nov-2019

### Platform Notes (Continued)

```

Model: 49
Model name: AMD EPYC 7542 32-Core Processor
Stepping: 0
CPU MHz: 1937.548
CPU max MHz: 2900.0000
CPU min MHz: 1500.0000
BogoMIPS: 5789.40
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64303 MB
node 0 free: 63976 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 64498 MB
node 1 free: 64316 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 64473 MB
node 2 free: 64184 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 64484 MB
node 3 free: 64312 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

```
From /proc/meminfo
MemTotal:          263947224 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: disabled, RSB
filling
```

run-level 3 Feb 25 19:28

```
SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
Filesystem      Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

```
/dev/sdb2      xfs      838G    20G    818G    3% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo          CFE1070 12/28/2019
Vendor:    Lenovo
Product:   ThinkSystem SR635 -[7Y00000000]-
Product Family: ThinkSystem
Serial:    0123456789
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x Samsung M393A4K40DB2-CWE 32 kB 2 rank 3200  
8x Unknown Unknown

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 623.xalancbmk_s(peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Nov-2019

### Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 623.xalanbmk\_s(peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalanbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2020

Hardware Availability: Jan-2020

Software Availability: Nov-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020

**Hardware Availability:** Jan-2020

**Software Availability:** Nov-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
602.gcc_s: -DSPEC_LP64
```

```
605.mcf_s: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2020

Hardware Availability: Jan-2020

Software Availability: Nov-2019

## Peak Portability Flags (Continued)

```
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

```
602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020

**Hardware Availability:** Jan-2020

**Software Availability:** Nov-2019

## Peak Optimization Flags (Continued)

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 8.97

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_peak = 9.19

CPU2017 License: 9017

Test Date: Feb-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

```
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-ljemalloc
```

```
631.deepsjeng_s: -flt0 -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-lmvec -lamdlibm -ljemalloc -lflang
```

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk\_s: -Wno-return-type

```
-L/spppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-E.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR635  
2.90 GHz, AMD EPYC 7542

SPECspeed®2017\_int\_base = 8.97

SPECspeed®2017\_int\_peak = 9.19

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2020

**Hardware Availability:** Jan-2020

**Software Availability:** Nov-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-E.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-25 06:49:56-0500.

Report generated on 2020-03-31 14:57:13 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-31.