



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECSpeed®2017_int_base = 10.7

SPECSpeed®2017_int_peak = 10.9

CPU2017 License: 55


Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

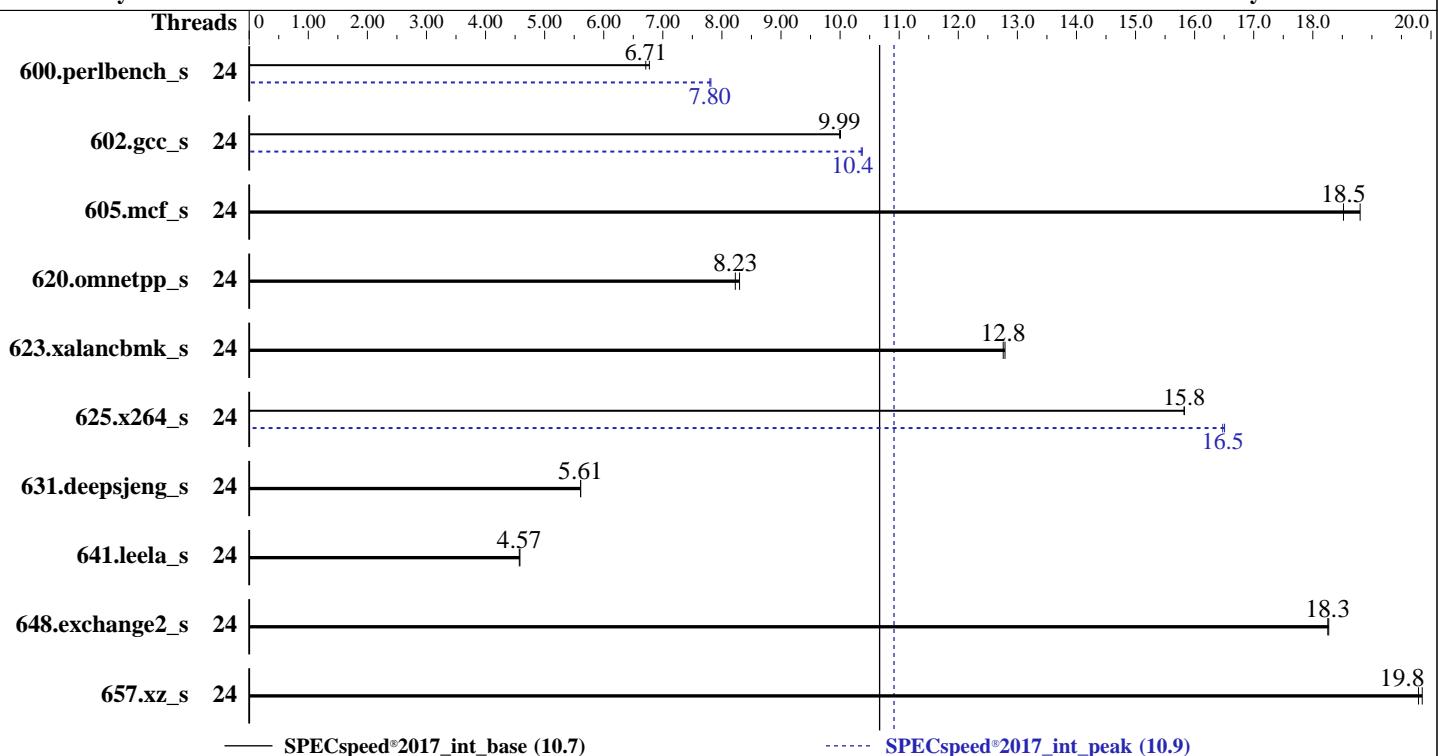

Hardware		Software	
CPU Name:	Intel Xeon Silver 4310	OS:	Red Hat Enterprise Linux 8.2 (Ootpa)
Max MHz:	3300		4.18.0-193.el8.x86_64
Nominal:	2100	Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Enabled:	24 cores, 2 chips		Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Orderable:	1,2 chips		C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Cache L1:	32 KB I + 48 KB D on chip per core	Parallel:	Yes
L2:	1.25 MB I+D on chip per core	Firmware:	Version 1.1.2 released Apr-2021
L3:	18 MB I+D on chip per chip	File System:	tmpfs
Other:	None	System State:	Run level 3 (multi-user)
Memory:	512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)	Base Pointers:	64-bit
Storage:	125 GB on tmpfs	Peak Pointers:	64-bit
Other:	None	Other:	jemalloc memory allocator V5.0.1
		Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	262	6.77	264	6.71			24	227	7.81	228	7.80				
602.gcc_s	24	398	10.0	398	9.99			24	384	10.4	384	10.4				
605.mcf_s	24	251	18.8	255	18.5			24	251	18.8	255	18.5				
620.omnetpp_s	24	197	8.30	198	8.23			24	197	8.30	198	8.23				
623.xalancbmk_s	24	111	12.8	111	12.8			24	111	12.8	111	12.8				
625.x264_s	24	111	15.8	111	15.8			24	107	16.5	107	16.5				
631.deepsjeng_s	24	255	5.61	256	5.61			24	255	5.61	256	5.61				
641.leela_s	24	372	4.58	373	4.57			24	372	4.58	373	4.57				
648.exchange2_s	24	161	18.3	161	18.3			24	161	18.3	161	18.3				
657.xz_s	24	311	19.9	312	19.8			24	311	19.9	312	19.8				
SPECspeed®2017_int_base = 10.7																
SPECspeed®2017_int_peak = 10.9																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
    1.7-ic2021.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled
Virtualization Technology : Disabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
CPU Interconnect Bus Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-ic2021.1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Thu May 6 02:55:32 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 12
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11

From lscpu:
Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 24
On-line CPU(s) list: 0-23
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2343.929
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 18432K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 18432 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22
node 0 size: 257411 MB
node 0 free: 257071 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23
node 1 size: 258042 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Platform Notes (Continued)

```
node 1 free: 248171 MB
node distances:
node   0   1
 0: 10 20
 1: 20 10

From /proc/meminfo
  MemTotal:      527824916 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                              Bypass disabled via prctl and
                                              seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swaps
                                              barriers and __user pointer
                                              sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB:
                                              conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 May 6 02:53

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	4.4G	121G	4%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge MX750c
Product Family:	PowerEdge
Serial:	1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x	002C00B3002C	18ASF4G72PDZ-3G2E1	32 GB	2 rank	3200, configured at 2666
15x	00AD063200AD	HMAA4GR7AJR8N-XN	32 GB	2 rank	3200, configured at 2666
16x	Not Specified	Not Specified			

BIOS:

BIOS Vendor:	Dell Inc.
BIOS Version:	1.1.2
BIOS Date:	04/09/2021
BIOS Revision:	1.1

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
| 625.x264_s(base, peak) 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
| 625.x264_s(base, peak) 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc

Fortran benchmarks:

-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

600.perlbench_s: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -DSPEC_OPENMP -fopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = 10.9

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-05-06 03:55:29-0400.

Report generated on 2021-05-25 16:59:19 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-25.