



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3


**Test Date:** Feb-2022

**Test Sponsor:** HPE

**Hardware Availability:** Mar-2022

**Tested by:** HPE

**Software Availability:** Jan-2022

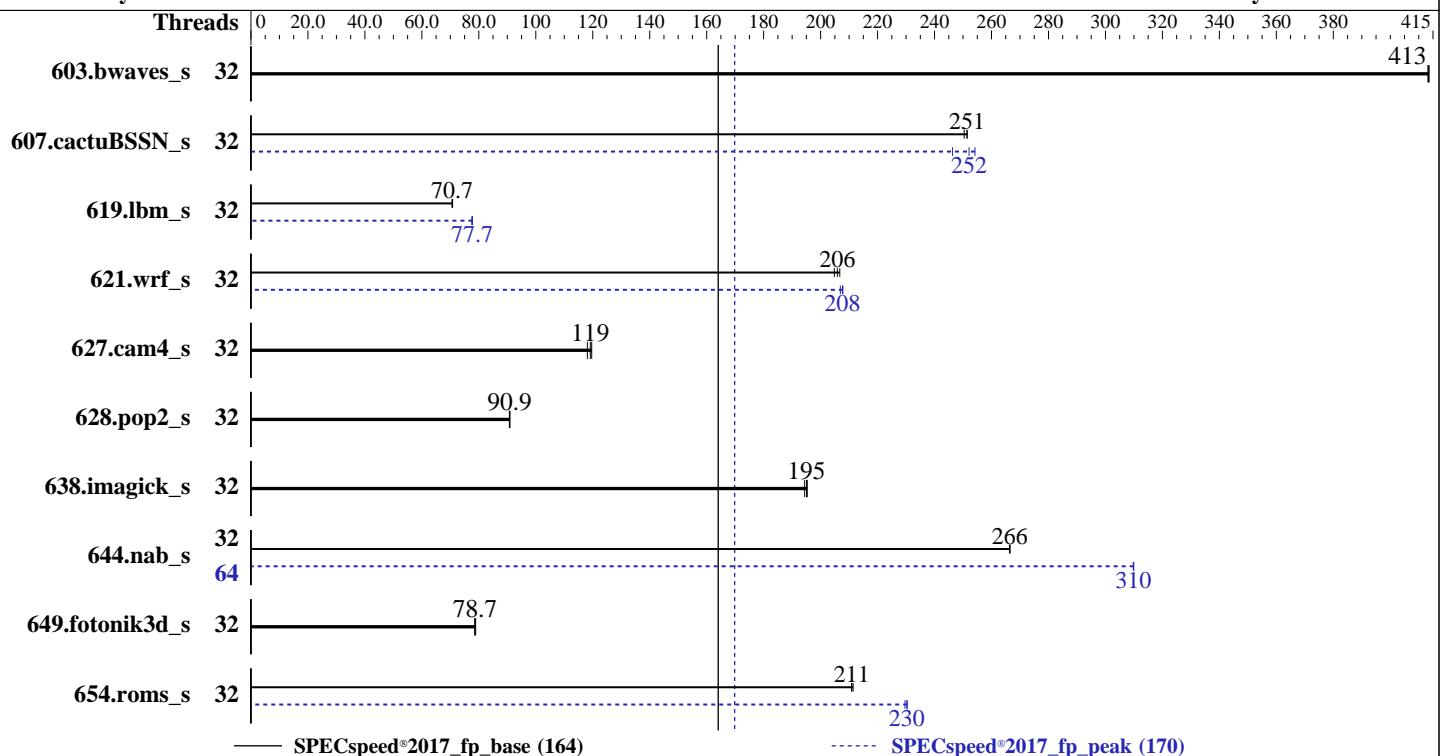

## Hardware

CPU Name: AMD EPYC 7573X  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 768 MB I+D on chip per chip,  
 96 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 480 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: Ubuntu 20.04.3 LTS  
 Compiler: Kernel 5.13.0-28-generic  
 Parallel: C/C++/Fortran: Version 3.2.0 of AOCC  
 Firmware: Yes  
 HPE BIOS Version A43 v2.56 02/10/2022 released  
 Feb-2022  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2022

Tested by: HPE

Software Availability: Jan-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	143	414	<b>143</b>	<b>413</b>	143	413	32	143	414	<b>143</b>	<b>413</b>	143	413
607.cactuBSSN_s	32	66.6	250	66.3	251	<b>66.3</b>	<b>251</b>	32	65.6	254	67.7	246	<b>66.1</b>	<b>252</b>
619.lbm_s	32	<b>74.1</b>	<b>70.7</b>	74.2	70.6	74.0	70.8	32	67.4	77.8	67.5	77.6	<b>67.4</b>	<b>77.7</b>
621.wrf_s	32	<b>64.2</b>	<b>206</b>	64.6	205	64.0	207	32	63.9	207	63.6	208	<b>63.7</b>	<b>208</b>
627.cam4_s	32	<b>74.4</b>	<b>119</b>	74.1	120	75.0	118	32	<b>74.4</b>	<b>119</b>	74.1	120	75.0	118
628.pop2_s	32	131	90.9	131	90.7	<b>131</b>	<b>90.9</b>	32	131	90.9	131	90.7	<b>131</b>	<b>90.9</b>
638.imagick_s	32	73.9	195	<b>74.0</b>	<b>195</b>	74.2	194	32	73.9	195	<b>74.0</b>	<b>195</b>	74.2	194
644.nab_s	32	<b>65.6</b>	<b>266</b>	65.6	266	65.6	266	64	<b>56.4</b>	<b>310</b>	56.4	310	<b>56.4</b>	310
649.fotonik3d_s	32	116	78.6	116	78.9	<b>116</b>	<b>78.7</b>	32	116	78.6	116	78.9	<b>116</b>	<b>78.7</b>
654.roms_s	32	74.5	211	<b>74.6</b>	<b>211</b>	74.7	211	32	68.6	230	<b>68.4</b>	<b>230</b>	68.3	230

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2\_s:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Operating System Notes (Continued)

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"  
LD_LIBRARY_PATH =  
    "/home/oem/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/oem/cpu2017/  
    amd_speed_aocc320_milanx_A_lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 607.cactubSSN\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 644.nab\_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 654.roms\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to One memory domain per socket

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test\_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

```
Sysinfo program /home/oem/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on oem-dl325Gen10Plus Mon Jan 10 15:20:52 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7573X 32-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu from util-linux 2.34:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

**Test Date:** Feb-2022

Test Sponsor: HPE

**Hardware Availability:** Mar-2022

Tested by: HPE

**Software Availability:** Jan-2022

## Platform Notes (Continued)

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	64
On-line CPU(s) list:	0-63
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	1
NUMA node(s):	8
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7573X 32-Core Processor
Stepping:	2
CPU MHz:	2794.995
BogoMIPS:	5589.99
Virtualization:	AMD-V
L1d cache:	1 MiB
L1i cache:	1 MiB
L2 cache:	16 MiB
L3 cache:	768 MiB
NUMA node0 CPU(s):	0-3,32-35
NUMA node1 CPU(s):	4-7,36-39
NUMA node2 CPU(s):	8-11,40-43
NUMA node3 CPU(s):	12-15,44-47
NUMA node4 CPU(s):	16-19,48-51
NUMA node5 CPU(s):	20-23,52-55
NUMA node6 CPU(s):	24-27,56-59
NUMA node7 CPU(s):	28-31,60-63
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf dni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

**Test Date:** Feb-2022

Test Sponsor: HPE

**Hardware Availability:** Mar-2022

Tested by: HPE

**Software Availability:** Jan-2022

## Platform Notes (Continued)

```
misalignsse 3dnowprefetch osw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc
cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold v_vmsave_vmlload vgif v_spec_ctrl umip pku ospke vaes
vpclmulqdq rdpid overflow_recov succor smca
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	512K	16M	8	Unified	2
L3	96M	768M	16	Unified	3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128711 MB
node 0 free: 127739 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129021 MB
node 1 free: 128917 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129021 MB
node 2 free: 128682 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129021 MB
node 3 free: 128890 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 128988 MB
node 4 free: 128747 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129021 MB
node 5 free: 128949 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129021 MB
node 6 free: 128958 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 116905 MB
node 7 free: 116750 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

**Test Date:** Feb-2022

Test Sponsor: HPE

**Hardware Availability:** Mar-2022

Tested by: HPE

**Software Availability:** Jan-2022

## Platform Notes (Continued)

```
node   0   1   2   3   4   5   6   7
 0: 10  11  11  11  11  11  11  11
 1: 11  10  11  11  11  11  11  11
 2: 11  11  10  11  11  11  11  11
 3: 11  11  11  10  11  11  11  11
 4: 11  11  11  11  10  11  11  11
 5: 11  11  11  11  11  10  11  11
 6: 11  11  11  11  11  11  10  11
 7: 11  11  11  11  11  11  11  10
```

From /proc/meminfo

```
MemTotal:      1044187296 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

Current active profile: balanced

/usr/bin/lsb\_release -d

Ubuntu 20.04.3 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bullseye/sid

os-release:

NAME="Ubuntu"

VERSION="20.04.3 LTS (Focal Fossa)"

ID=ubuntu

ID\_LIKE=debian

PRETTY\_NAME="Ubuntu 20.04.3 LTS"

VERSION\_ID="20.04"

HOME\_URL="https://www.ubuntu.com/"

SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

```
Linux oem-dl325Gen10Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed Jan 19 14:08:10
UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

barriers and \_\_user pointer  
sanitization

Mitigation: Full AMD retrpoline,  
IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Jan 10 10:27

SPEC is set to: /home/oem/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	16G	401G	4%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL325 Gen10 Plus v2
Product Family:	ProLiant
Serial:	CN70381LLR

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMABAGL7ABR4N-XN	128 GB	4 rank	3200
8x UNKNOWN	NOT AVAILABLE		

BIOS:

BIOS Vendor:	HPE
BIOS Version:	A43
BIOS Date:	02/10/2022
BIOS Revision:	2.56
Firmware Revision:	2.60

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
   | 644.nab_s(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

---

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange  
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1  
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order  
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

**SPECspeed®2017\_fp\_base = 164**

**SPECspeed®2017\_fp\_peak = 170**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -flang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIB -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIB -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: basepeak = yes
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## Peak Optimization Flags (Continued)

654.roms\_s (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_S: -m64 -Wl,-mllvm -Wl,-enable-x86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017\_fp\_base = 164

SPECspeed®2017\_fp\_peak = 170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>  
<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>  
<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 04:50:51-0500.

Report generated on 2022-03-22 10:11:53 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.