



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3


**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** Jun-2022

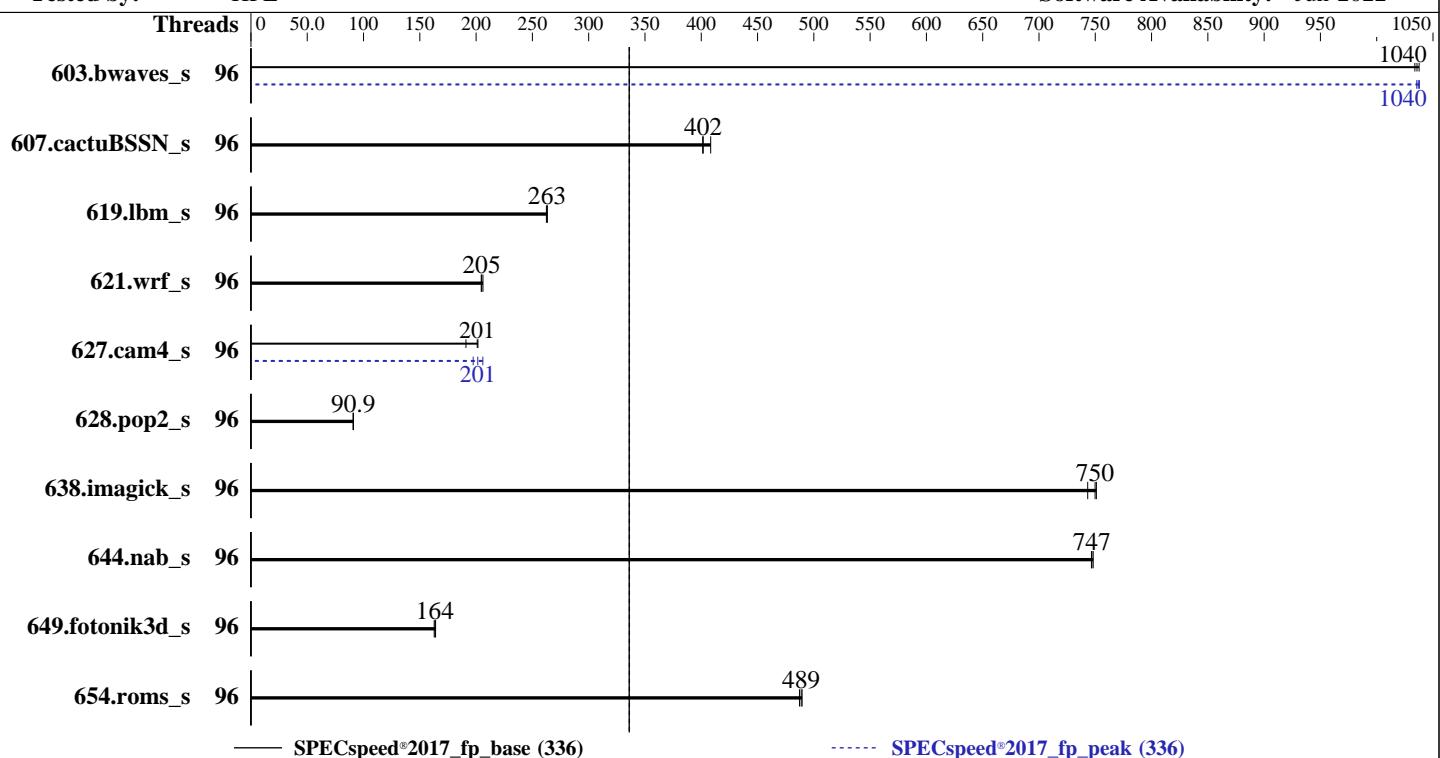

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8468	OS:	SUSE Linux Enterprise Server 15 SP4
Max MHz:	3800	Compiler:	5.14.21-150400.22-default
Nominal:	2100	Parallel:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	96 cores, 2 chips	Firmware:	Fortran: Version 2022.1 of Intel Fortran Compiler for Linux
Orderable:	1, 2 chip(s)	File System:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	System State:	HPE BIOS Version v1.22 01/18/2023 released
L2:	2 MB I+D on chip per core	Base Pointers:	Jan-2023
L3:	105 MB I+D on chip per chip	Peak Pointers:	Run level 5 (multi-user)
Other:	None	Other:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)	Power Management:	64-bit
Storage:	1 x 960 GB SATA SSD		jemalloc memory allocator V5.0.1
Other:	None		BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** Jun-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	56.9	1040	<b>57.0</b>	<b>1040</b>	57.1	1030	96	57.0	1040	<b>56.9</b>	<b>1040</b>	56.8	1040
607.cactuBSSN_s	96	40.8	408	<b>41.5</b>	<b>402</b>	41.5	401	96	40.8	408	<b>41.5</b>	<b>402</b>	41.5	401
619.lbm_s	96	20.0	262	19.9	263	<b>19.9</b>	<b>263</b>	96	20.0	262	19.9	263	<b>19.9</b>	<b>263</b>
621.wrf_s	96	64.7	205	<b>64.5</b>	<b>205</b>	64.2	206	96	64.7	205	<b>64.5</b>	<b>205</b>	64.2	206
627.cam4_s	96	<b>44.1</b>	<b>201</b>	44.0	202	46.4	191	96	<b>44.0</b>	<b>201</b>	44.9	197	43.0	206
628.pop2_s	96	<b>131</b>	<b>90.9</b>	131	90.8	130	91.0	96	<b>131</b>	<b>90.9</b>	131	90.8	<b>130</b>	91.0
638.imagick_s	96	<b>19.2</b>	<b>750</b>	19.4	743	19.2	751	96	<b>19.2</b>	<b>750</b>	19.4	743	<b>19.2</b>	751
644.nab_s	96	23.4	748	23.4	747	<b>23.4</b>	<b>747</b>	96	23.4	748	23.4	747	<b>23.4</b>	<b>747</b>
649.fotonik3d_s	96	55.6	164	<b>55.8</b>	<b>164</b>	56.0	163	96	55.6	164	<b>55.8</b>	<b>164</b>	56.0	163
654.roms_s	96	32.2	490	<b>32.2</b>	<b>489</b>	32.3	487	96	32.2	490	<b>32.2</b>	<b>489</b>	32.3	487

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

IRQ balance service was stopped using "systemctl stop irqbalance.service"

tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8468 processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMI Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Feb 16 20:45:14 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** Jun-2022

## Platform Notes (Continued)

```
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

---

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w
20:45:14 up 15 min, 0 users, load average: 0.00, 0.15, 0.32
USER      TTY      FROM          LOGIN@     IDLE    JCPU    PCPU WHAT
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 4127169
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 4127169
```

---

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=96 --tune base,peak -o all --define drop_caches
    fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=96 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

---

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000161
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 48
siblings         : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

### 7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** Jun-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8468
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	48
Socket(s):	2
Stepping:	8
BogoMIPS:	4200.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnmi avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocndq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities VT-x
Virtualization:	
L1d cache:	4.5 MiB (96 instances)
L1i cache:	3 MiB (96 instances)
L2 cache:	192 MiB (96 instances)
L3 cache:	210 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-23,48-71
NUMA node1 CPU(s):	24-47,72-95
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-23,48-71  
node 0 size: 515796 MB  
node 0 free: 513235 MB  
node 1 cpus: 24-47,72-95  
node 1 size: 516020 MB  
node 1 free: 515229 MB  
node distances:  
node 0 1  
0: 10 20  
1: 20 10

-----  
9. /proc/meminfo

MemTotal: 1056580820 kB

-----  
10. who -r  
run-level 5 Feb 16 20:30

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status  
graphical running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

disabled                         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon  
                                   appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh  
                                   boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed  
                                   debug-shell dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi  
                                   ipmievfd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load lunmask man-db-create  
                                   multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server  
                                   rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd\_generate\_opts smb  
                                   snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures  
                                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2  
                                   upower wpa\_supplicant@  
indirect                         pcscd saned@ wickedd

---

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=8fe32e86-615c-460b-ab75-95f5e406870a  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

---

14. cpupower frequency-info  
analyzing CPU 0:  
    Unable to determine current policy  
    boost state support:  
        Supported: yes  
        Active: yes

---

15. sysctl  
kernel.numa\_balancing             1  
kernel.randomize\_va\_space         2  
vm.compaction\_proactiveness     20  
vm.dirty\_background\_bytes         0  
vm.dirty\_background\_ratio        10  
vm.dirty\_bytes                     0  
vm.dirty\_expire\_centisecs       3000  
vm.dirty\_ratio                     20  
vm.dirty\_writeback\_centisecs    500  
vm.dirtytime\_expire\_seconds     43200  
vm.extfrag\_threshold             500  
vm.min\_unmapped\_ratio            1  
vm.nr\_hugepages                   0  
vm.nr\_hugepages\_mempolicy       0  
vm.nr\_overcommit\_hugepages     0  
vm.swappiness                     60

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
    defrag           always defer defer+madvise [madvise] never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled   always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs  60000  
    defrag                 1  
    max_ptes_none          511  
    max_ptes_shared         256  
    max_ptes_swap           64  
    pages_to_scan           4096  
    scan_sleep_millisecs   10000
```

```
-----  
18. OS release  
    From /etc/*-release /etc/*-version  
    os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3        btrfs  891G  137G  754G  16% /home
```

```
-----  
20. /sys/devices/virtual/dmi/id  
    Vendor:          HPE  
    Product:         ProLiant DL360 Gen11  
    Product Family: ProLiant  
    Serial:          CNX20800PW
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
```

Memory:

16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.22  
BIOS Date: 01/18/2023  
BIOS Revision: 1.22  
Firmware Revision: 1.10

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactubssn\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## Compiler Version Notes (Continued)

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-16 10:15:14-0500.

Report generated on 2023-04-12 12:42:49 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.