



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECrate®2017\_int\_base = 886**

**SPECrate®2017\_int\_peak = 912**

CPU2017 License: 3


**Test Date:** May-2023

**Test Sponsor:** HPE

**Hardware Availability:** May-2023

**Tested by:** HPE

**Software Availability:** Mar-2023

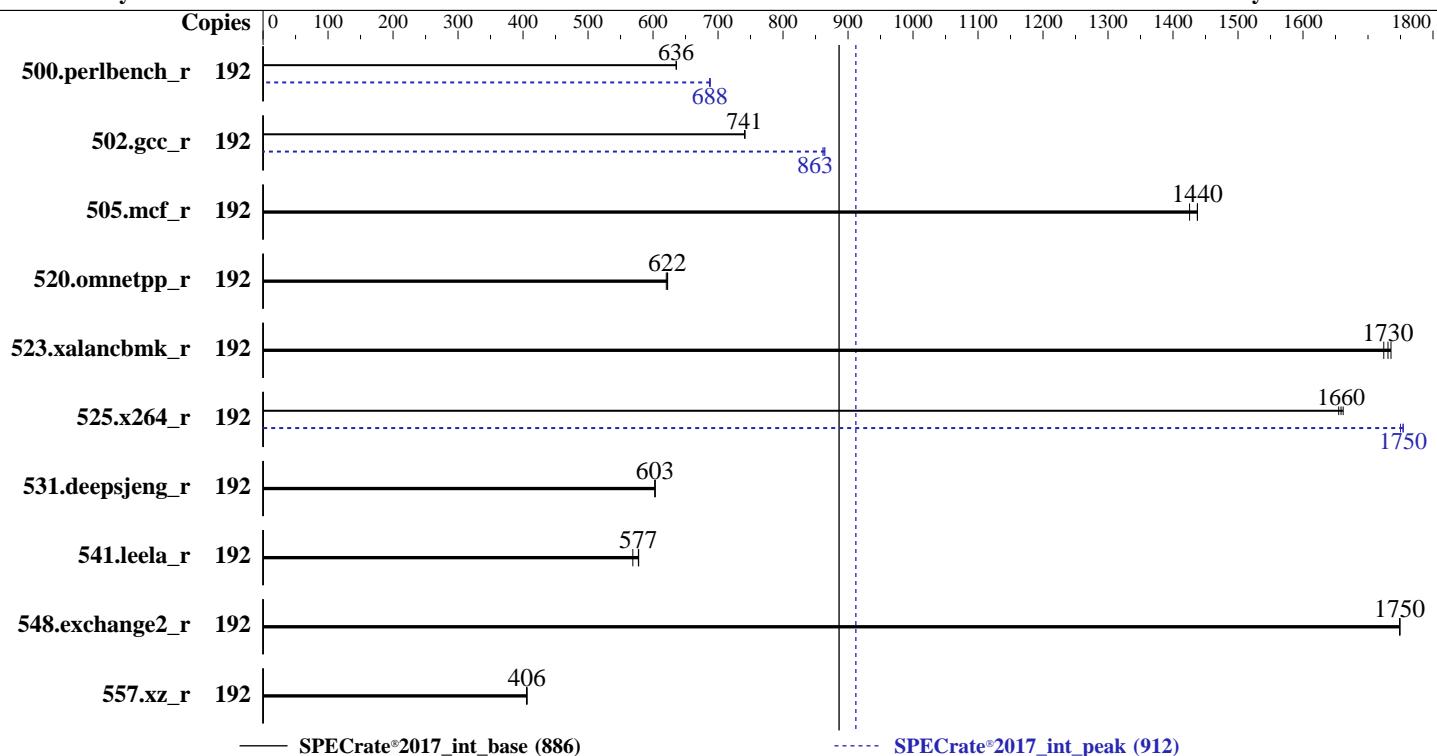

## Hardware

CPU Name: Intel Xeon Gold 6418H  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 22.04.1 LTS  
 Compiler: Kernel 5.15.0-69-generic  
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECrate®2017\_int\_base = 886**

**SPECrate®2017\_int\_peak = 912**

CPU2017 License: 3

Test Date: May-2023

Test Sponsor: HPE

Hardware Availability: May-2023

Tested by: HPE

Software Availability: Mar-2023

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	481	636	<b>481</b>	<b>636</b>	481	636	192	<b>445</b>	<b>688</b>	445	687	444	688		
502.gcc_r	192	367	742	<b>367</b>	<b>741</b>	367	741	192	<b>315</b>	<b>863</b>	314	864	316	861		
505.mcf_r	192	216	1440	<b>216</b>	<b>1440</b>	218	1430	192	216	1440	<b>216</b>	<b>1440</b>	218	1430		
520.omnetpp_r	192	<b>405</b>	<b>622</b>	405	622	406	620	192	<b>405</b>	<b>622</b>	405	622	406	620		
523.xalancbmk_r	192	<b>117</b>	<b>1730</b>	118	1720	117	1740	192	<b>117</b>	<b>1730</b>	118	1720	117	1740		
525.x264_r	192	<b>203</b>	<b>1660</b>	203	1650	202	1660	192	192	1750	<b>192</b>	<b>1750</b>	192	1750		
531.deepsjeng_r	192	<b>365</b>	<b>603</b>	365	603	365	603	192	<b>365</b>	<b>603</b>	365	603	365	603		
541.leela_r	192	<b>551</b>	<b>577</b>	559	569	550	578	192	<b>551</b>	<b>577</b>	559	569	550	578		
548.exchange2_r	192	<b>288</b>	<b>1750</b>	288	1750	288	1750	192	<b>288</b>	<b>1750</b>	288	1750	288	1750		
557.xz_r	192	512	405	510	406	<b>511</b>	<b>406</b>	192	512	405	510	406	<b>511</b>	<b>406</b>		

**SPECrate®2017\_int\_base = 886**

**SPECrate®2017\_int\_peak = 912**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 IRQ balance service was stopped using "systemctl stop irqbalance.service"  
 tuned-adm profile was set to Accelerator-Performance using "tuned-adm profile accelerator-performance"  
 perf-bias for all the CPUs is set using "cpupower set -b 0"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Gold 6418H Processor

BIOS Configuration

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Intel UPI Link Power Management set to Enabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

The reported date by sysinfo is incorrect due to computer clock being not set correctly.

The correct test date is: May-2023

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on admin1 Thu Mar 2 13:05:48 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

13. Services, from systemctl list-unit-files  
14. Linux kernel boot-time arguments, from /proc/cmdline  
15. cpupower frequency-info  
16. tuned-adm active  
17. sysctl  
18. /sys/kernel/mm/transparent\_hugepage  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
20. OS release  
21. Disk information  
22. /sys/devices/virtual/dmi/id  
23. dmidecode  
24. BIOS

---

1. uname -a  
Linux admin1 5.15.0-69-generic #76-Ubuntu SMP Fri Mar 17 17:19:29 UTC 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
13:05:48 up 7 min, 3 users, load average: 0.04, 0.09, 0.06  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
admin1 ttys1 - 13:01 3:48 0.03s 0.01s -bash  
admin1 pts/0 172.16.0.100 13:03 2:44 0.01s 0.01s sshd: admin1 [priv]  
admin1 pts/1 172.16.0.100 13:03 12.00s 1.11s 0.01s sudo -i

3. Username  
From environment variable \$USER: root  
From the command 'logname': admin1

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 132056340  
process 4126305  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. sysinfo process ancestry  
/sbin/init  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: admin1 [priv]  
sshd: admin1@pts/0  
-bash  
sudo -i  
sudo -i  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak -o all intrate

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.026/templogs/preenv.intrate.026.0.log --lognum 026.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
  model name      : Intel(R) Xeon(R) Gold 6418H  
  vendor_id       : GenuineIntel  
  cpu family     : 6  
  model          : 143  
  stepping        : 7  
  microcode       : 0x2b0001b0  
  bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
  cpu cores       : 24  
  siblings         : 48  
  4 physical ids (chips)  
  192 processors (hardware threads)  
  physical id 0: core ids 0-23  
  physical id 1: core ids 0-23  
  physical id 2: core ids 0-23  
  physical id 3: core ids 0-23  
  physical id 0: apicids 0-47  
  physical id 1: apicids 128-175  
  physical id 2: apicids 256-303  
  physical id 3: apicids 384-431
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         46 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                192  
On-line CPU(s) list:   0-191  
Vendor ID:             GenuineIntel  
Model name:            Intel(R) Xeon(R) Gold 6418H  
CPU family:            6  
Model:                 143  
Thread(s) per core:    2  
Core(s) per socket:    24  
Socket(s):             4  
Stepping:              7  
BogoMIPS:              4200.00  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor  
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1  
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand  
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13  
invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow  
vnmi flexpriority ept vpid ept_ad fsfsbase tsc_adjust bmil avx2 smep bm12
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECrate®2017\_int\_base = 886**

**SPECrate®2017\_int\_peak = 912**

CPU2017 License: 3

**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** May-2023

Tested by: HPE

**Software Availability:** Mar-2023

## Platform Notes (Continued)

```
ermis invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsavopt xsavc
xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lll
arch_capabilities
```

Virtualization:

VT-x

L1d cache:

4.5 MiB (96 instances)

L1i cache:

3 MiB (96 instances)

L2 cache:

192 MiB (96 instances)

L3 cache:

240 MiB (4 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-11,96-107

NUMA node1 CPU(s):

12-23,108-119

NUMA node2 CPU(s):

24-35,120-131

NUMA node3 CPU(s):

36-47,132-143

NUMA node4 CPU(s):

48-59,144-155

NUMA node5 CPU(s):

60-71,156-167

NUMA node6 CPU(s):

72-83,168-179

NUMA node7 CPU(s):

84-95,180-191

Vulnerability Itlb multihit:

Not affected

Vulnerability Lltf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-11,96-107

node 0 size: 128604 MB

node 0 free: 128080 MB

node 1 cpus: 12-23,108-119

node 1 size: 129018 MB

node 1 free: 128598 MB

node 2 cpus: 24-35,120-131

node 2 size: 129018 MB

node 2 free: 128560 MB

node 3 cpus: 36-47,132-143

node 3 size: 129018 MB

node 3 free: 128240 MB

node 4 cpus: 48-59,144-155

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

```
node 4 size: 129018 MB
node 4 free: 128672 MB
node 5 cpus: 60-71,156-167
node 5 size: 129018 MB
node 5 free: 128618 MB
node 6 cpus: 72-83,168-179
node 6 size: 128982 MB
node 6 free: 128646 MB
node 7 cpus: 84-95,180-191
node 7 size: 129011 MB
node 7 free: 128646 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  30  30  30  30  30  30
  1: 20  10  30  30  30  30  30  30
  2: 30  30  10  20  30  30  30  30
  3: 30  30  20  10  30  30  30  30
  4: 30  30  30  30  10  20  30  30
  5: 30  30  30  30  20  10  30  30
  6: 30  30  30  30  30  30  10  20
  7: 30  30  30  30  30  30  20  10

-----
9. /proc/meminfo
MemTotal:      1056450748 kB

-----
10. who -r
run-level 5 Mar 2 13:00

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
Default Target      Status
graphical           degraded

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                  LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----
13. Services, from systemctl list-unit-files
STATE    UNIT FILES
enabled   ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
          cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
          grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
          multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
          setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
          systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
          ufw unattended-upgrades vauth
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled    console-getty debug-shell iscsid nftables powertop rsync serial-getty@
            systemd-boot-check-no-failures systemd-network-generator systemd-sysext
            systemd-time-wait-sync upower
generated   apport
indirect    uuid
masked     cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
          x11-common
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/vmlinuz-5.15.0-69-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
    Unable to determine current policy  
    boost state support:  
        Supported: yes  
        Active: yes

-----  
16. tuned-adm active  
Current active profile: accelerator-performance

-----  
17. sysctl  
kernel.numa\_balancing               1  
kernel.randomize\_va\_space           2  
vm.compaction\_proactiveness       20  
vm.dirty\_background\_bytes           0  
vm.dirty\_background\_ratio          10  
vm.dirty\_bytes                      0  
vm.dirty\_expire\_centisecs       3000  
vm.dirty\_ratio                     40  
vm.dirty\_writeback\_centisecs    500  
vm.dirtytime\_expire\_seconds     43200  
vm.extfrag\_threshold             500  
vm.min\_unmapped\_ratio           1  
vm.nr\_hugepages                  0  
vm.nr\_hugepages\_mempolicy      0  
vm.nr\_overcommit\_hugepages     0  
vm.swappiness                     10  
vm.watermark\_boost\_factor     15000  
vm.watermark\_scale\_factor     10  
vm.zone\_reclaim\_mode          0

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag              always defer defer+madvise [madvise] never  
enabled            always [madvise] never  
hpage\_pmd\_size   2097152  
shmem\_enabled     always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs  60000  
defrag                 1  
max\_ptes\_none        511  
max\_ptes\_shared      256  
max\_ptes\_swap        64  
pages\_to\_scan        4096  
scan\_sleep\_millisecs 10000

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.1 LTS

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	349G	69G	84%	/

22. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL560 Gen11
Product Family:	ProLiant
Serial:	CNX2250G5V

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Samsung M321R4GA3BB0-CQKDG	32 GB	2 rank	4800
29x Samsung M321R4GA3BB6-CQKDG	32 GB	2 rank	4800
32x UNKNOWN NOT AVAILABLE			

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	HPE
BIOS Version:	1.30
BIOS Date:	03/01/2023
BIOS Revision:	1.30
Firmware Revision:	1.30

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECrate®2017\_int\_base = 886**

**SPECrate®2017\_int\_peak = 912**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Mar-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

```
502.gcc_r: -m32  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017\_int\_base = 886

SPECrate®2017\_int\_peak = 912

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-02 08:05:47-0500.

Report generated on 2024-01-29 17:43:56 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.