



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_fp_peak = 332

CPU2017 License: 6573


Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

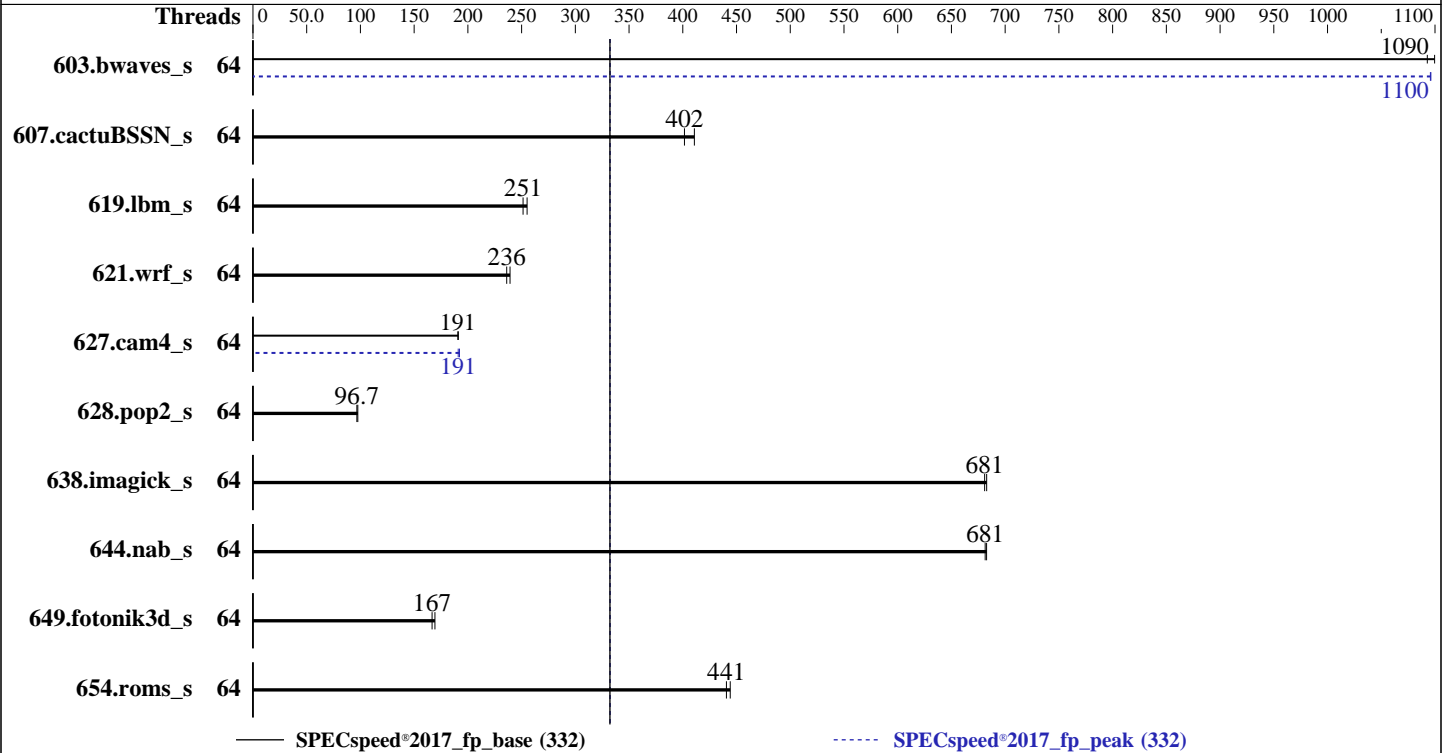

Hardware

CPU Name: Intel Xeon Platinum 8462Y+
 Max MHz: 4100
 Nominal: 2800
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 60 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.19-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 1.0.0 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECSpeed®2017_fp_peak = 332

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	53.7	1100	54.0	1090			64	53.8	1100	53.8	1100		
607.cactuBSSN_s	64	41.5	402	40.6	411			64	41.5	402	40.6	411		
619.lbm_s	64	20.5	255	20.8	251			64	20.5	255	20.8	251		
621.wrf_s	64	56.0	236	55.3	239			64	56.0	236	55.3	239		
627.cam4_s	64	46.4	191	46.5	191			64	46.4	191	46.1	192		
628.pop2_s	64	122	97.6	123	96.7			64	122	97.6	123	96.7		
638.imagick_s	64	21.1	683	21.2	681			64	21.1	683	21.2	681		
644.nab_s	64	25.6	683	25.6	681			64	25.6	683	25.6	681		
649.fotonik3d_s	64	54.7	167	53.8	169			64	54.7	167	53.8	169		
654.roms_s	64	35.4	444	35.7	441			64	35.4	444	35.7	441		

SPECSpeed®2017_fp_base = **332**

SPECSpeed®2017_fp_peak = **332**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_fp_peak = 332

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
Uncorrectable Memory Error : Disabled
      Logical Processor : Disabled
      Virtualization Technology : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      C1E : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 4 12:38:38 2023

```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- ```

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
 Linux localhost 5.14.21-150400.19-default #1 SMP PREEMPT_DYNAMIC Wed Apr 20 08:32:52 UTC 2022 (d6fb753/lp)
 x86_64 x86_64 x86_64 GNU/Linux

2. w

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```
12:38:38 up 2:15, 2 users, load average: 7.08, 6.39, 4.24
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root : : 10:25 ?xdm? 1:10 0.02s gdm-session-worker [pam/gdm-autologin]
root :0 : 10:25 ?xdm? 1:10 0.02s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
```

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126145
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126145
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt --nopower --runmode
speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

### 6. /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8462Y+
vendor_id : GenuineIntel
cpu family : 6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```
model : 143
stepping : 8
microcode : 0x2b0001b0
bugs : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores : 32
siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8462Y+
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
BogoMIPS: 5600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
 lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
 abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
 avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
 avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
 cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
 arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
 vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
 tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECSpeed®2017\_fp\_peak = 332

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node1 CPU(s): 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 3M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 128M     | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 60M      | 120M     | 15   | Unified     | 3     | 65536 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62
node 0 size: 515505 MB
node 0 free: 506686 MB
node 1 cpus: 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63
node 1 size: 516058 MB
node 1 free: 510516 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10

```

9. /proc/meminfo

MemTotal: 1056322052 kB

10. who -r

run-level 5 May 4 10:26

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
graphical degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT LOAD ACTIVE SUB DESCRIPTION
* systemd-udev-settle.service loaded failed failed Wait for udev To Complete Device Initialization

```

13. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd avahi-daemon bluetooth
cron display-manager firewallld getty@ haveged irqbalance iscsi issue-generator kbdsettings
klog libvirtld lvm2-monitor nscd nvme-fc-boot-connections oracle postfix purge-kernels
rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny wpa_supplicant xencommons

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ appstream-sync-cache autofs autofast-initscripts avahi-dnsmasq bgpd
blk-availability bluetooth-mesh boot-sysctl booth-arbitrator booth@ ca-certificates
chrony-wait chronyd clamav-milter clamd cloud-config cloud-final cloud-init
cloud-init-local console-getty containerbuild-regionsrv corosync corosync-notifyd crm_mon
cryptctl-client cryptctl-server ctdb cups cups-browsed ddclient debug-shell dhcpcd dhcpcd6
dhcrelay dhcrelay6 dirsrv@ dlm dmraid-activation dnsmasq docker-img-store-setup
docker-img-store-setup-xfs drbd drbd-lvchange@ drbd-wait-promotable@ ebttables
exchange-bmc-os-info fetchmail freshclam google-guest-agent google-shutdown-scripts
google-startup-scripts gpm grub2-once guestregister haveged-switch-root hawk
hwloc-dump-hwdata ipmi ipmievdev ipvsadm iscsi-init iscsid iscsiui isis issue-add-ssh-keys
kdump kdump-early kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask lvmlockd
lvmlocks man-db-create mariadb mariadb@ multipathd munge named nfs nfs-blkmap nfs-server
nfsserver nm-cloud-setup nmb ntp-wait ntpd nvme-autoconnect openvpn@ ospf6d ospfd
ostree-remount pacemaker pppoe pppoe-server racoon racoon-setkey radvd rarpd@ rdisc ripd
ripngd rootgrow rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion sapconf saprouter
saptune sbd sbd_remote serial-getty@ slurmctld slurmd slurmdbd smartd_generate_opts smb
snmpd snmptrapd spamd spamd speech-dispatcherd squid srp_daemon srp_daemon_port@
strongswan strongswan-starter svnserv sysstat systemd-boot-check-no-failures
systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
systemd-timesyncd tcsh tuned udisks2 upower virtinterfaced virtnetworkd virtnodedev
virtnwfilterd virtproxyd virtqemud virtsecret virtstorage virtxend vsftpd waagent
winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend
xen-watchdog xenconsoled xendomains xenstored xrdp xrdp-sesman ypbind zebra
indirect pcsd saned@ uidd virtlockd virtlogd wickedd

```

```

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.19-default
root=UUID=5dbfa664-5ba7-440a-b916-2ff8d67469f6
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

16. tuned-adm active
No current active profile.

```

```

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 20
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

```

18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

```

20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 4.2G 56G 7% /mnt/ramdisk

```

```

22. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge XE8640
Product Family: PowerEdge
Serial: 1234567

```

```

23. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 10x 00CE00B300CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
 6x 00CE069D00CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

BIOS Version: 1.0.0  
BIOS Date: 03/23/2023  
BIOS Revision: 1.0

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECSpeed®2017\_fp\_peak = 332

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017\_fp\_peak = 332

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-04 00:38:37-0400.

Report generated on 2023-06-06 19:09:47 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.