



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

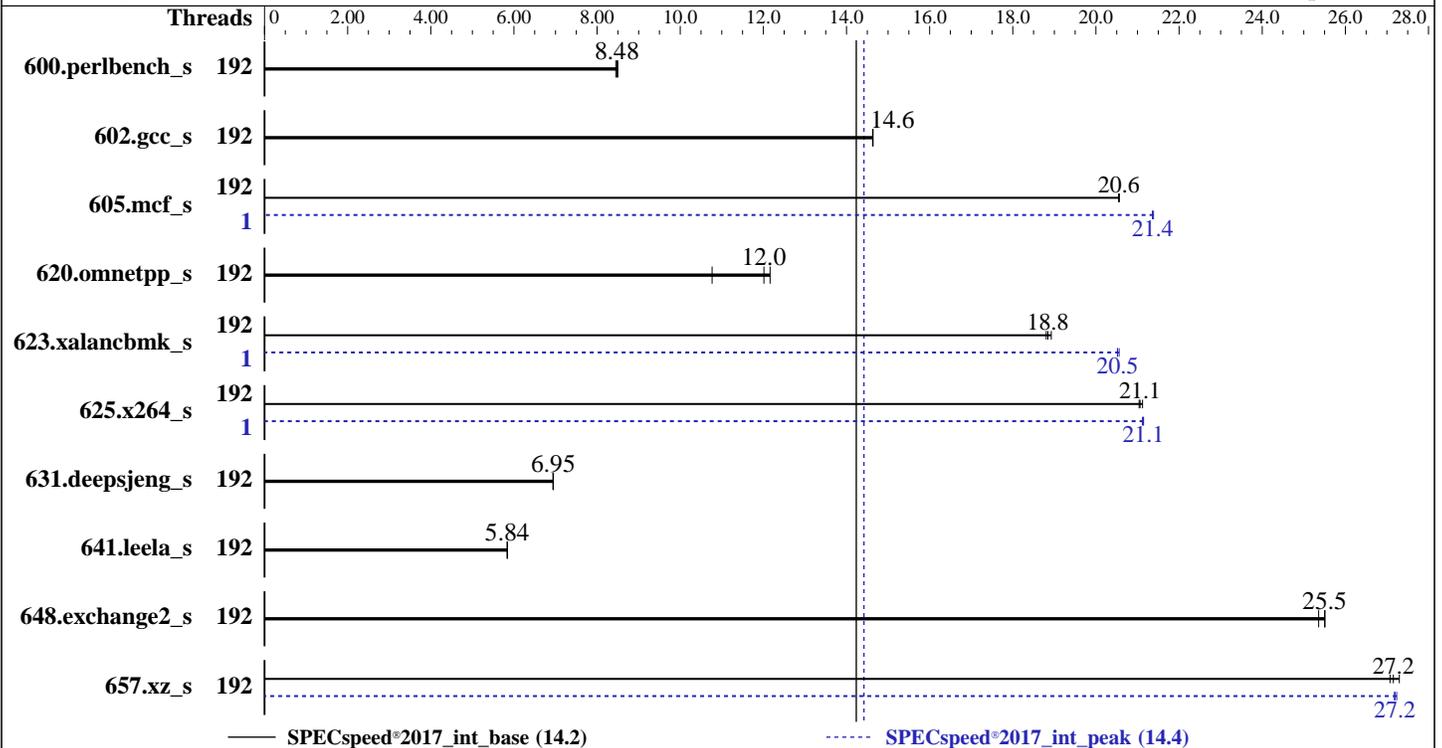

### Hardware

CPU Name: AMD EPYC 9684X  
 Max MHz: 3700  
 Nominal: 2550  
 Enabled: 192 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 1152 MB I+D on chip per chip,  
 96 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.40 07/12/2023 released Jul-2023  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2023  
Hardware Availability: Sep-2023  
Software Availability: Apr-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	209	8.50	210	8.45	<b>209</b>	<b>8.48</b>	192	209	8.50	210	8.45	<b>209</b>	<b>8.48</b>
602.gcc_s	192	<b>272</b>	<b>14.6</b>	272	14.6	272	14.6	192	<b>272</b>	<b>14.6</b>	272	14.6	272	14.6
605.mcf_s	192	<b>230</b>	<b>20.6</b>	230	20.5	230	20.6	1	221	21.4	<b>221</b>	<b>21.4</b>	221	21.4
620.omnetpp_s	192	<b>136</b>	<b>12.0</b>	151	10.8	134	12.2	192	<b>136</b>	<b>12.0</b>	151	10.8	134	12.2
623.xalancbmk_s	192	<b>75.2</b>	<b>18.8</b>	75.4	18.8	74.9	18.9	1	69.1	20.5	68.9	20.6	<b>69.1</b>	<b>20.5</b>
625.x264_s	192	83.8	21.0	83.5	21.1	<b>83.8</b>	<b>21.1</b>	1	<b>83.4</b>	<b>21.1</b>	83.5	21.1	83.4	21.1
631.deepsjeng_s	192	207	6.94	206	6.95	<b>206</b>	<b>6.95</b>	192	207	6.94	206	6.95	<b>206</b>	<b>6.95</b>
641.leela_s	192	292	5.84	<b>292</b>	<b>5.84</b>	292	5.84	192	292	5.84	<b>292</b>	<b>5.84</b>	292	5.84
648.exchange2_s	192	115	25.5	116	25.4	<b>115</b>	<b>25.5</b>	192	115	25.5	116	25.4	<b>115</b>	<b>25.5</b>
657.xz_s	192	228	27.1	<b>228</b>	<b>27.2</b>	226	27.3	192	227	27.2	<b>227</b>	<b>27.2</b>	227	27.2

SPECspeed®2017\_int\_base = **14.2**

SPECspeed®2017\_int\_peak = **14.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

### BIOS Configuration

Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
AMD SMT Option set to Disabled  
Memory Patrol Scrubbing set to Disabled  
NUMA memory domains per socket set to Four memory domains per socket  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
ACPI CST C2 Latency set to 18 microseconds  
Memory PStates set to Disabled  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode  
The system ROM used for this result contains microcode version 0xa10123e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version Genoa-XPI 1.0.0.8

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri Aug 4 11:08:46 2023

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 249 (249.11+suse.124.g2bc0b2c447)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `tuned-adm active`
16. `sysctl`
17. `/sys/kernel/mm/transparent_hugepage`
18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
19. OS release
20. Disk information
21. `/sys/devices/virtual/dmi/id`
22. `dmidecode`
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
11:08:46 up 12 min,  3 users,  load average: 0.10, 0.10, 0.09
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      :        :              10:58      ?xdm?      2:06      0.02s    gdm-session-worker [pam/gdm-password]
root      :1       :1            10:58      ?xdm?      2:06      0.00s    /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root      pts/1    172.16.0.100  10:59      14.00s     1.22s     0.12s    /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094513
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 3094513
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/1
-bash
python3 ./run_intspeed_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeer
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/templogs/preenv.intspeed.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9684X 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 2
microcode      : 0xa10123e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 96
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9684X 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    1
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

**SPECspeed®2017\_int\_base = 14.2**

**SPECspeed®2017\_int\_peak = 14.4**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

Core(s) per socket:          96
Socket(s):                   2
Stepping:                    2
Frequency boost:             enabled
CPU max MHz:                 2550.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    5092.24
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                constant_tsc rep_good noopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:              AMD-V
L1d cache:                   6 MiB (192 instances)
L1i cache:                   6 MiB (192 instances)
L2 cache:                    192 MiB (192 instances)
L3 cache:                    2.3 GiB (24 instances)
NUMA node(s):                24
NUMA node0 CPU(s):          0-7
NUMA node1 CPU(s):          8-15
NUMA node2 CPU(s):          16-23
NUMA node3 CPU(s):          24-31
NUMA node4 CPU(s):          32-39
NUMA node5 CPU(s):          40-47
NUMA node6 CPU(s):          48-55
NUMA node7 CPU(s):          56-63
NUMA node8 CPU(s):          64-71
NUMA node9 CPU(s):          72-79
NUMA node10 CPU(s):         80-87
NUMA node11 CPU(s):         88-95
NUMA node12 CPU(s):         96-103
NUMA node13 CPU(s):         104-111
NUMA node14 CPU(s):         112-119
NUMA node15 CPU(s):         120-127
NUMA node16 CPU(s):         128-135
NUMA node17 CPU(s):         136-143
NUMA node18 CPU(s):         144-151
NUMA node19 CPU(s):         152-159
NUMA node20 CPU(s):         160-167
NUMA node21 CPU(s):         168-175
NUMA node22 CPU(s):         176-183
NUMA node23 CPU(s):         184-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_int\_base = 14.2**

**SPECspeed®2017\_int\_peak = 14.4**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Platform Notes (Continued)

	filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	96M	2.3G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)

```

node 0 cpus: 0-7
node 0 size: 31943 MB
node 0 free: 31354 MB
node 1 cpus: 8-15
node 1 size: 32253 MB
node 1 free: 32117 MB
node 2 cpus: 16-23
node 2 size: 32253 MB
node 2 free: 32118 MB
node 3 cpus: 24-31
node 3 size: 32253 MB
node 3 free: 32011 MB
node 4 cpus: 32-39
node 4 size: 32253 MB
node 4 free: 31771 MB
node 5 cpus: 40-47
node 5 size: 32253 MB
node 5 free: 32032 MB
node 6 cpus: 48-55
node 6 size: 32253 MB
node 6 free: 32043 MB
node 7 cpus: 56-63
node 7 size: 32253 MB
node 7 free: 32063 MB
node 8 cpus: 64-71
node 8 size: 32253 MB
node 8 free: 32144 MB
node 9 cpus: 72-79
node 9 size: 32253 MB
node 9 free: 32144 MB
node 10 cpus: 80-87
node 10 size: 32253 MB
node 10 free: 32131 MB
node 11 cpus: 88-95
node 11 size: 32253 MB
node 11 free: 32216 MB
node 12 cpus: 96-103
node 12 size: 32253 MB
node 12 free: 32194 MB
node 13 cpus: 104-111
node 13 size: 32253 MB
node 13 free: 32182 MB
node 14 cpus: 112-119
node 14 size: 32253 MB
node 14 free: 32185 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_int\_base = 14.2**

**SPECspeed®2017\_int\_peak = 14.4**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```
node 15 cpus: 120-127
node 15 size: 32253 MB
node 15 free: 32208 MB
node 16 cpus: 128-135
node 16 size: 32219 MB
node 16 free: 32137 MB
node 17 cpus: 136-143
node 17 size: 32253 MB
node 17 free: 32177 MB
node 18 cpus: 144-151
node 18 size: 32253 MB
node 18 free: 32184 MB
node 19 cpus: 152-159
node 19 size: 32253 MB
node 19 free: 32188 MB
node 20 cpus: 160-167
node 20 size: 32253 MB
node 20 free: 32128 MB
node 21 cpus: 168-175
node 21 size: 32253 MB
node 21 free: 32023 MB
node 22 cpus: 176-183
node 22 size: 32253 MB
node 22 free: 32177 MB
node 23 cpus: 184-191
node 23 size: 32159 MB
node 23 free: 32050 MB
```

node distances:

```
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
0: 10 11 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
3: 12 12 12 10 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 11 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 11 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 12 12 10 11 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 12 12 11 10 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 11 11 10 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32 32 32 32 32 32 32 32 32
12: 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 12 12 12 12 12 12 12 12 12
13: 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 12 12 12 12 12 12 12 12 12
14: 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 12 12 12 12 12 12 12 12 12
15: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 10 11 11 12 12 12 12 12 12
16: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 11 10 11 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 11 11 10 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11 11 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 10 11 12 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 11 10 12 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10 11 12 12 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 10 11 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 11 10 10
```

```
9. /proc/meminfo
MemTotal: 792220972 kB
```

```
10. who -r
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_int\_base = 14.2**

**SPECspeed®2017\_int\_peak = 14.4**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

run-level 5 Aug 4 10:56

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status  
graphical running

-----  
12. Services, from systemctl list-unit-files

STATE UNIT FILES  
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron  
display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog  
lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa\_supplicant  
enabled-runtime systemd-remount-fs  
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon  
appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh  
boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed  
debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once  
haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio  
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap  
nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpccbind rpmconfigcheck  
rsyncd rtkit-daemon serial-getty@ smartd\_generate\_opts smb snmpd snmptrapd  
speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd tuned udisks2 upower wpa\_supplicant@  
indirect pcsd saned@ wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=e710f57a-f290-46a0-a58f-3ef44a1e3f08  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info

analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.55 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active

Current active profile: latency-performance

-----  
16. sysctl

kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 3  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sdc2   btrfs 445G  99G  347G  23% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     ProLiant DL385 Gen11
Product Family: ProLiant
Serial:      DL385G11-006

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  9x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
 15x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

```

23. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.40  
BIOS Date: 07/12/2023  
BIOS Revision: 1.40  
Firmware Revision: 1.40

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalanbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

```

C++ benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -Ofast -march=znver4

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-fstruct-layout=9 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -finline-aggressive -mllvm -unroll-threshold=100

-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

-mllvm -do-block-reorder=aggressive

-fvirtual-function-elimination -fvisibility=hidden

-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>



# SPEC CPU<sup>®</sup>2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed<sup>®</sup>2017\_int\_base = 14.2

SPECspeed<sup>®</sup>2017\_int\_peak = 14.4

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2023-08-04 01:38:45-0400.

Report generated on 2023-11-06 15:29:04 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-06.