



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 4.83**

**MPI2007 license:** 4


**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Feb-2011

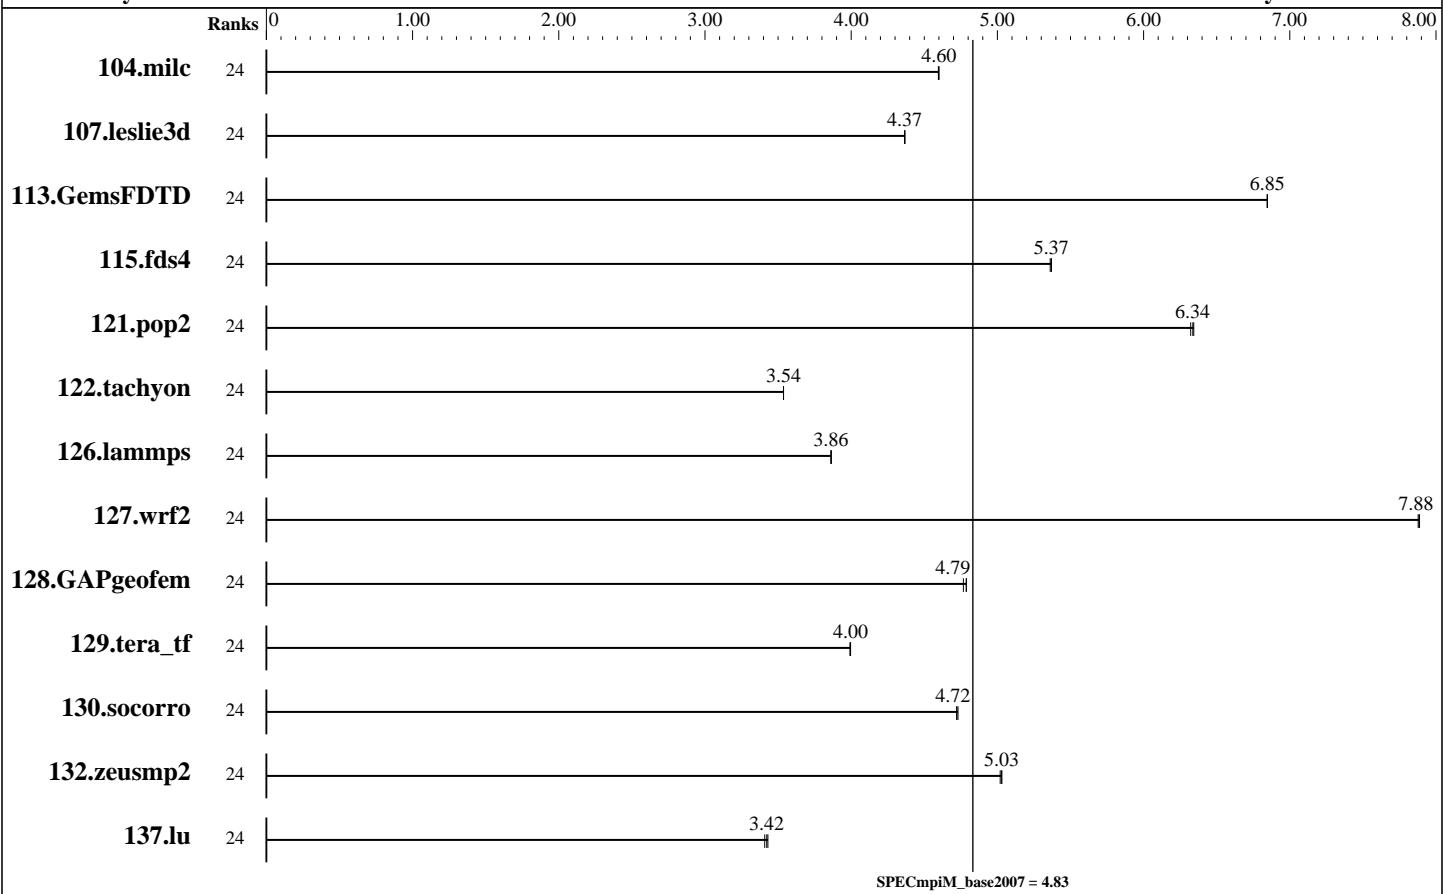

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	24	340	4.60	340	4.60	<b>340</b>	<b>4.60</b>									
107.leslie3d	24	1196	4.37	<b>1196</b>	<b>4.37</b>	1195	4.37									
113.GemsFDTD	24	921	6.85	921	6.85	<b>921</b>	<b>6.85</b>									
115.fds4	24	363	5.37	<b>363</b>	<b>5.37</b>	364	5.36									
121.pop2	24	651	6.34	651	6.34	653	6.32									
122.tachyon	24	791	3.54	791	3.54	791	3.54									
126.lammps	24	<b>755</b>	<b>3.86</b>	755	3.86	755	3.86									
127.wrf2	24	<b>989</b>	<b>7.88</b>	990	7.88	988	7.89									
128.GAPgeomfem	24	433	4.77	<b>431</b>	<b>4.79</b>	431	4.79									
129.tera_tf	24	693	4.00	<b>693</b>	<b>4.00</b>	693	3.99									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpM\_peak2007 = Not Run**

**SPECmpM\_base2007 = 4.83**

**MPI2007 license:** 4

**Test date:** Mar-2011

**Test sponsor:** SGI

**Hardware Availability:** Feb-2011

**Tested by:** SGI

**Software Availability:** Feb-2011

## Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	24	<b>808</b>	<b>4.72</b>	808	4.72	807	4.73									
132.zeusmp2	24	617	5.03	<b>617</b>	<b>5.03</b>	618	5.02									
137.lu	24	1072	3.43	1078	3.41	<b>1074</b>	<b>3.42</b>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Hardware Summary

Type of System: Homogeneous  
Compute Node: SGI Rackable C2112-4TY14 Compute Node  
Interconnect: InfiniBand (MPI and I/O)  
File Server Node: SGI Altix 450 with TP9700  
Total Compute Nodes: 2  
Total Chips: 4  
Total Cores: 24  
Total Threads: 48  
Total Memory: 48 GB  
Base Ranks Run: 24  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C Compiler for Linux Version 11.1, Build 20100806  
C++ Compiler: Intel C++ Compiler for Linux Version 11.1, Build 20100806  
Fortran Compiler: Intel Fortran Compiler for Linux Version 11.1, Build 20100806  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
MPI Library: SGI MPT 2.03  
Other MPI Info: OFED 1.4.2  
Pre-processors: None  
Other Software: None

## Node Description: SGI Rackable C2112-4TY14 Compute Node

### Hardware

Number of nodes: 2  
Uses of the node: compute  
Vendor: SGI  
Model: SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.06GHz)  
CPU Name: Intel Xeon X5675  
CPU(s) orderable: 1-2 chips  
Chips enabled: 2  
Cores enabled: 12  
Cores per chip: 6  
Threads per core: 2  
CPU Characteristics: Six Core, 3.06 GHz, 6.4 GT/s QPI  
Intel Turbo Boost Technology up to 3.46 GHz  
Hyper-Threading Technology enabled  
3067  
32 KB I + 32 KB D on chip per core  
256 KB I+D on chip per core  
12 MB I+D on chip per chip  
None  
24 GB (6 x 4 GB, 2Rx4 PC3-10600R-9, ECC)  
None  
None  
Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
Number of Adapters: 1

### Software

Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
Adapter Driver: OFED-1.4.2  
Adapter Firmware: 2.7.0  
Operating System: SUSE Linux Enterprise Server 11 SP1  
Kernel 2.6.32.27-0.2-default  
Local File System: NFSv3  
Shared File System: NFSv3 IPoIB  
System State: Multi-user, run level 3  
Other Software: SGI Performance Suite 1.0, Build 702r19.sles11-1010072114

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 4.83**

**MPI2007 license:** 4

**Test date:** Mar-2011

**Test sponsor:** SGI

**Hardware Availability:** Feb-2011

**Tested by:** SGI

**Software Availability:** Feb-2011

## Node Description: SGI Rackable C2112-4TY14 Compute Node

Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	1
Interconnect Type:	InfiniBand

## Node Description: SGI Altix 450 with TP9700

### Hardware

Number of nodes:	1
Uses of the node:	fileserver
Vendor:	SGI
Model:	SGI Altix 450 (Intel Itanium 2, 1.6GHz)
CPU Name:	Intel Itanium 2 9030
CPU(s) orderable:	2-38 chips
Chips enabled:	4
Cores enabled:	8
Cores per chip:	2
Threads per core:	1
CPU Characteristics:	1.6GHz/8MB, 533MHz FSB
CPU MHz:	1600
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	4 MB I+D on chip per core
Other Cache:	None
Memory:	24 GB (12 x 2 GB, 2Rx4 PC2-3200-4, ECC)
Disk Subsystem:	8.2 TB RAID 5
Other Hardware:	60 x 146 GB FC (Seagate Cheetah 15K.5)
Adapter:	None
Number of Adapters:	MT25208 InfiniHost III Ex
Slot Type:	(PCIe x8 Gen1 2.5 GT/s)
Data Rate:	PCIe x8 Gen1
Ports Used:	InfiniBand 4x DDR
Interconnect Type:	2

### Software

Adapter:	MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)
Adapter Driver:	OFED-1.4.1
Adapter Firmware:	5.3.0
Operating System:	SUSE Linux Enterprise Server 10 SP3 (ia64) Kernel 2.6.16.60-0.68.1-default
Local File System:	xfs
Shared File System:	--
System State:	Multi-user, run level 3
Other Software:	SGI ProPack 6SP6 for Linux, Build 606rp75.sles10-1009032310

## Interconnect Description: InfiniBand (MPI and I/O)

### Hardware

Vendor:	Mellanox Technologies
Model:	None
Switch Model:	Voltaire Grid Director 4036
Number of Switches:	1
Number of Ports:	36
Data Rate:	InfiniBand 4x QDR
Firmware:	2.0.1 BUILD ID 22

### Software

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpiM\_peak2007 = Not Run**

**SPECmpiM\_base2007 = 4.83**

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Feb-2011

## Interconnect Description: InfiniBand (MPI and I/O)

**Topology:** Fat tree  
**Primary Use:** MPI and I/O traffic

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version 080016
Hyper-Threading Technology enabled (default)
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated in the OS via
/etc/init.d/acpid start
/etc/init.d/powersaved start
powersave -f
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 4.83**

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Feb-2011

## Base Portability Flags (Continued)

127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

## Base Optimization Flags

C benchmarks:

-O3 -xSSE4.2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE4.2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE4.2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE4.2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20100202.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20100202.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20100202.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20100202.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14  
(Intel Xeon X5675, 3.06GHz)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 4.83**

**MPI2007 license:** 4

**Test date:** Mar-2011

**Test sponsor:** SGI

**Hardware Availability:** Feb-2011

**Tested by:** SGI

**Software Availability:** Feb-2011

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.

Report generated on Tue Jul 22 13:42:37 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 4 May 2011.