



# SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28


**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Oct-2020

**Hardware Availability:** Oct-2020

**Software Availability:** Oct-2020

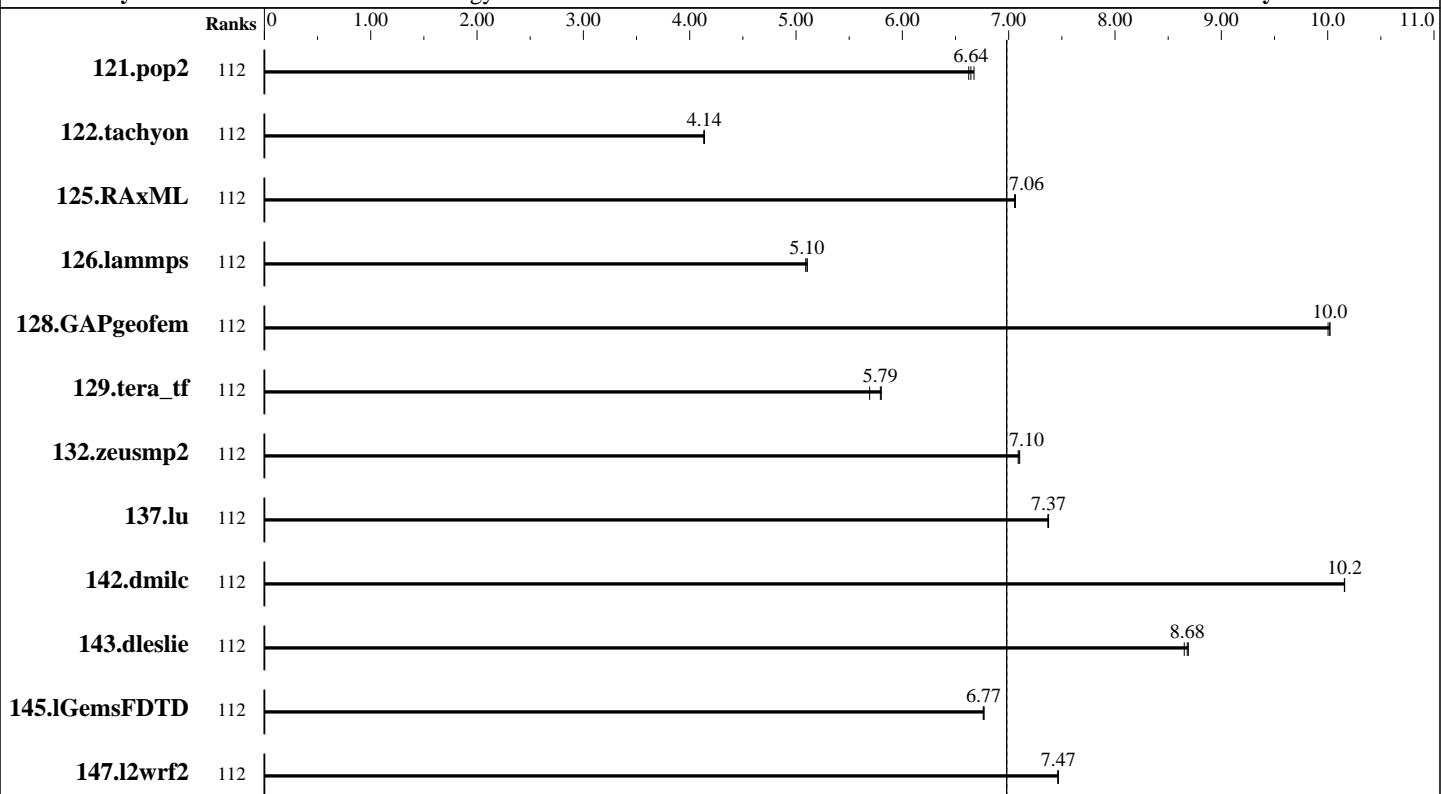

**SPECmpiL\_base2007 = 6.98**

**SPECmpiL\_peak2007 = 6.98**

## Results Table

Benchmark	Base						Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio		
121.pop2	112	583	6.67	<b>586</b>	<b>6.64</b>	587	6.62	112	583	6.67	<b>586</b>	<b>6.64</b>	587	6.62
122.tachyon	112	<b>470</b>	<b>4.14</b>	470	4.14	470	4.13	112	<b>470</b>	<b>4.14</b>	470	4.14	470	4.13
125.RAxML	112	<b>414</b>	<b>7.06</b>	413	7.06	414	7.06	112	<b>414</b>	<b>7.06</b>	413	7.06	414	7.06
126.lammps	112	<b>482</b>	<b>5.10</b>	482	5.11	483	5.09	112	<b>482</b>	<b>5.10</b>	482	5.11	483	5.09
128.GAPgeomfem	112	593	10.0	<b>592</b>	<b>10.0</b>	592	10.0	112	593	10.0	<b>592</b>	<b>10.0</b>	592	10.0
129.tera_tf	112	<b>190</b>	<b>5.79</b>	193	5.69	189	5.80	112	<b>190</b>	<b>5.79</b>	193	5.69	189	5.80
132.zeusmp2	112	298	7.10	<b>299</b>	<b>7.10</b>	299	7.09	112	298	7.10	<b>299</b>	<b>7.10</b>	299	7.09
137.lu	112	570	7.38	570	7.37	<b>570</b>	<b>7.37</b>	112	570	7.38	570	7.37	<b>570</b>	<b>7.37</b>
142.dmilc	112	<b>363</b>	<b>10.2</b>	363	10.2	363	10.2	112	<b>363</b>	<b>10.2</b>	363	10.2	<b>363</b>	10.2
143.dleslie	112	358	8.65	<b>357</b>	<b>8.68</b>	357	8.69	112	358	8.65	<b>357</b>	<b>8.68</b>	357	8.69
145.lGemsFDTD	112	652	6.77	652	6.76	<b>652</b>	<b>6.77</b>	112	652	6.77	652	6.76	<b>652</b>	<b>6.77</b>
147.l2wrf2	112	1099	7.47	<b>1099</b>	<b>7.47</b>	1099	7.46	112	1099	7.47	<b>1099</b>	<b>7.47</b>	1099	7.46

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28

**Test date:** Oct-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

### Hardware Summary

Type of System:	Homogeneous
Compute Node:	ThinkSystem SR860 V2
Interconnect:	Nvidia Mellanox ConnectX-6 HDR Infiniband
File Server Node:	NFS
Total Compute Nodes:	1
Total Chips:	4
Total Cores:	112
Total Threads:	112
Total Memory:	1536 GB
Base Ranks Run:	112
Minimum Peak Ranks:	112
Maximum Peak Ranks:	112

### Software Summary

C Compiler:	Intel Parallel Studio C Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
C++ Compiler:	Intel Parallel Studio C++ Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
Fortran Compiler:	Intel Parallel Studio Fortran Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
MPI Library:	Intel Parallel Studio MPI Library for Linux* OS Version 2020 Update 2 Build 20200624
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

## Node Description: ThinkSystem SR860 V2

### Hardware

Number of nodes:	1
Uses of the node:	compute
Vendor:	Lenovo Global Technology
Model:	ThinkSystem SR860 V2
CPU Name:	Intel Xeon Platinum 8380H
CPU(s) orderable:	2,4 chips
Chips enabled:	4
Cores enabled:	112
Cores per chip:	28
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 4.3 GHz 2900
CPU MHz:	32 KB I + 32 KB D on chip per core
Primary Cache:	1 MB I+D on chip per core
Secondary Cache:	39424 KB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem:	1 x 1 TB SATA 2.5" SSD
Other Hardware:	N/A
Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Number of Adapters:	1
Slot Type:	PCI-Express 3.0 x16
Data Rate:	200 Gb/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-6 HDR Infiniband

### Software

Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Adapter Driver:	5.1-0.6.6
Adapter Firmware:	20.25.2006
Operating System:	SUSE Linux Enterprise Server 15 SP2
Local File System:	5.3.18-22-default
Shared File System:	xfs
System State:	None
Other Software:	Multi-user, run level 3
	None



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28

**Test date:** Oct-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

## Node Description: NFS

<b>Hardware</b>		<b>Software</b>
Number of nodes:	1	Adapter: Nvidia Mellanox ConnectX-6 HDR Infiniband
Uses of the node:	Fileserver	Adapter Driver: 5.1-0.6.6
Vendor:	Lenovo Global Technology	Adapter Firmware: 20.25.2006
Model:	ThinkSystem SR860 V2	Operating System: SUSE Linux Enterprise Server 15 SP2
CPU Name:	Intel Xeon Platinum 8380H	Local File System: None
CPU(s) orderable:	2,4 chips	Shared File System: NFS
Chips enabled:	4	System State: Multi-User, run level 3
Cores enabled:	112	Other Software: None
Cores per chip:	28	
Threads per core:	1	
CPU Characteristics:	Intel Turbo Boost Technology up to 4.3 GHz	
CPU MHz:	2900	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	1 MB I+D on chip per core	
L3 Cache:	39424 KB I+D on chip per chip	
Other Cache:	None	
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)	
Disk Subsystem:	1 x 1 TB SATA 2.5" SSD	
Other Hardware:	None	
Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband	
Number of Adapters:	1	
Slot Type:	PCI-Express 3.0 x16	
Data Rate:	200 Gb/s	
Ports Used:	1	
Interconnect Type:	Nvidia Mellanox ConnectX-6 HDR Infiniband	

## Interconnect Description: Nvidia Mellanox ConnectX-6 HDR Infiniband

<b>Hardware</b>		<b>Software</b>
Vendor:	Nvidia	
Model:	Nvidia Mellanox ConnectX-6 HDR Infiniband	
Switch Model:	Nvidia Mellanox QM8700	
Number of Switches:	1	
Number of Ports:	40	
Data Rate:	200 Gb/s	
Firmware:	3.9.0606	
Topology:	Mesh	
Primary Use:	MPI and I/O traffic	

## Submit Notes

The config file option 'submit' was used.



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28

**Test date:** Oct-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

## General Notes

**MPI startup command:**

mpixec command was used to start MPI jobs.

**RAM configuration:**

Compute nodes have 2 x 32 GB RDIMM on each memory channel.

**BIOS settings:**

Operating Mode : Maximum Performance Mode

Intel Hyper-Threading Technology (SMT): Disabled

SNC (Sub-NUMA Cluster): Enable

Yes: The test sponsor attests, as of date of publication,  
that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,  
that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,  
that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Benchmarks using both Fortran and C:  
mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

## Base Optimization Flags

C benchmarks:  
-O3 -ipo -xCORE-AVX512 -no-prec-div

Continued on next page



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28

**Test date:** Oct-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

## Base Optimization Flags (Continued)

C++ benchmarks:

126.lammps: -O3 -ipo -xCORE-AVX512 -no-prec-div

Fortran benchmarks:

-O3 -ipo -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -ipo -xCORE-AVX512 -no-prec-div

## Peak Optimization Flags

C benchmarks:

122.tachyon: basepeak = yes

125.RAxML: basepeak = yes

142.dmilc: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

129.tera\_tf: basepeak = yes

137.lu: basepeak = yes

143.dleslie: basepeak = yes

145.lGemsFDTD: basepeak = yes

Benchmarks using both Fortran and C:

121.pop2: basepeak = yes

128.GAPgeofem: basepeak = yes

132.zeusmp2: basepeak = yes

147.l2wrf2: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel1121\\_flags.20201007.html](http://www.spec.org/mpi2007/flags/EM64T_Intel1121_flags.20201007.html)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.html](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.html)



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiL\_peak2007 = 6.98**

**SPECmpiL\_base2007 = 6.98**

**MPI2007 license:** 28

**Test date:** Oct-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20201007.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.xml)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.xml](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Nov 4 16:31:46 2020 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 4 November 2020.