



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DA8

SPECint®_rate2006 = 80.2

SPECint_rate_base2006 = 77.6

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

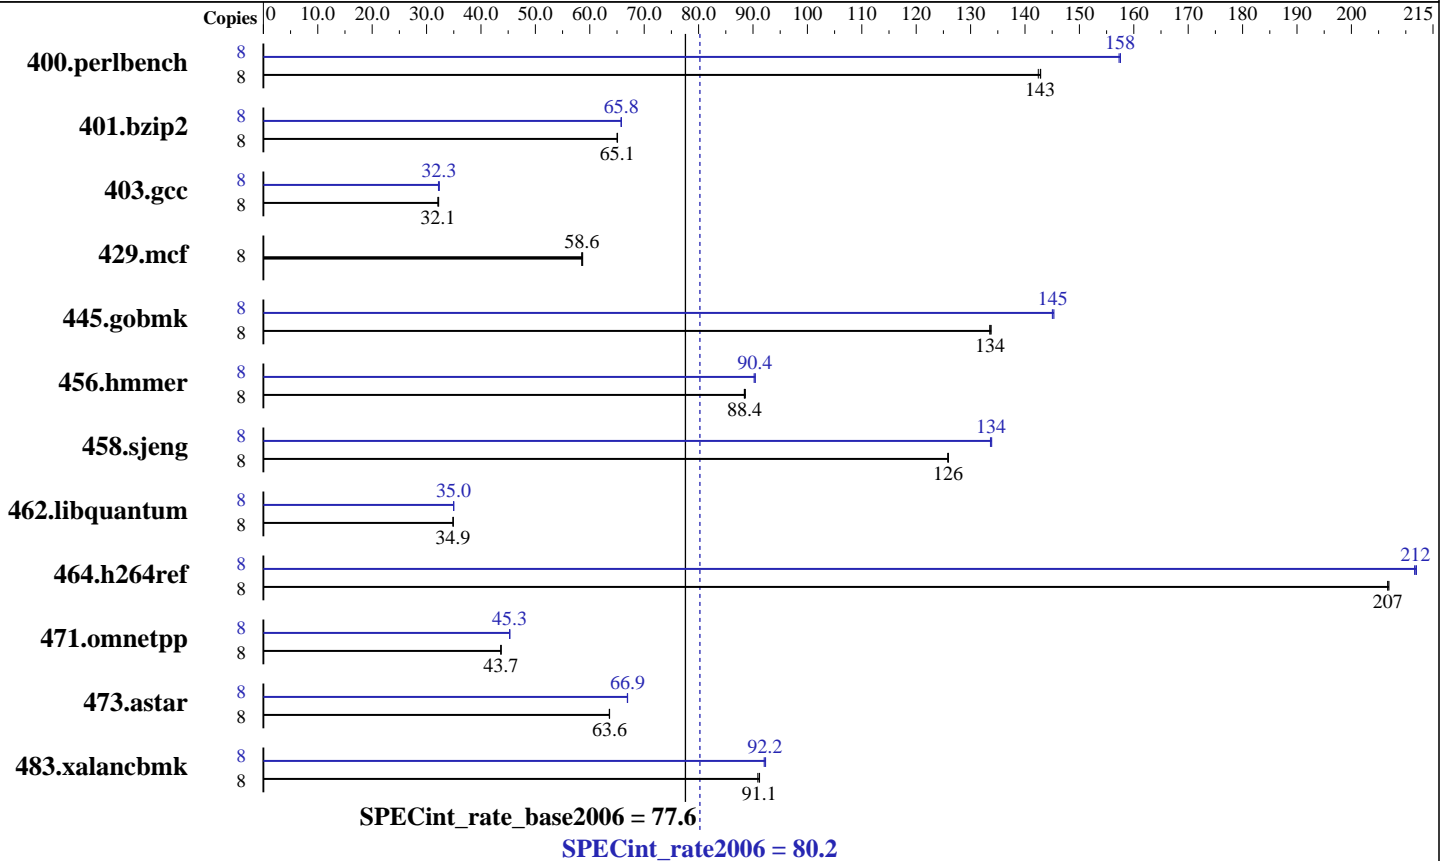

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 2.66GHz, 1333 MHz Bus
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 X 2GB ECC PC2-5300, CL5, FBDIMM)
 Disk Subsystem: 750GB IDE, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Build no 20070322Z
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DA8

SPECint_rate2006 = 80.2

SPECint_rate_base2006 = 77.6

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	547	143	547	143	549	142	8	496	158	497	157	496	158
401.bzip2	8	1187	65.1	1186	65.1	1187	65.0	8	1173	65.8	1174	65.7	1173	65.8
403.gcc	8	1999	32.2	2005	32.1	2006	32.1	8	2001	32.2	1995	32.3	1991	32.3
429.mcf	8	1247	58.5	1245	58.6	1243	58.7	8	1247	58.5	1245	58.6	1243	58.7
445.gobmk	8	627	134	628	134	629	134	8	577	145	578	145	579	145
456.hammer	8	842	88.6	844	88.4	844	88.4	8	826	90.4	826	90.4	827	90.2
458.sjeng	8	769	126	769	126	770	126	8	724	134	723	134	724	134
462.libquantum	8	4752	34.9	4751	34.9	4752	34.9	8	4738	35.0	4737	35.0	4743	35.0
464.h264ref	8	856	207	856	207	857	207	8	837	212	836	212	835	212
471.omnetpp	8	1144	43.7	1145	43.7	1146	43.6	8	1104	45.3	1104	45.3	1105	45.2
473.astar	8	883	63.6	882	63.6	883	63.6	8	839	66.9	839	67.0	839	66.9
483.xalancbmk	8	607	90.9	605	91.2	606	91.1	8	600	92.1	598	92.3	599	92.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with SC816S-R700 case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of <http://www.supermicro.com/products/motherboard/Xeon1333/5000X/X7DA8.cfm>
The system bus runs at 1333 MHz

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DA8

SPECint_rate2006 = 80.2
SPECint_rate_base2006 = 77.6

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Base Optimization Flags (Continued)

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99
C++ benchmarks:
icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE
401.bzip2: Same as 400.perlbench
403.gcc: Same as 400.perlbench
429.mcf: basepeak = yes
445.gobmk: Same as 400.perlbench
456.hmmmer: Same as 400.perlbench
458.sjeng: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro
Motherboard X7DA8**

SPECint_rate2006 = 80.2

SPECint_rate_base2006 = 77.6

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

473.astar: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -QxP -O2 -Qipo
-Qprec-div- -Qunroll14 -Ob2 -Qsfa16 -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

483.xalancbmk: Same as 471.omnetpp

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:26:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 June 2007.