



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55


Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

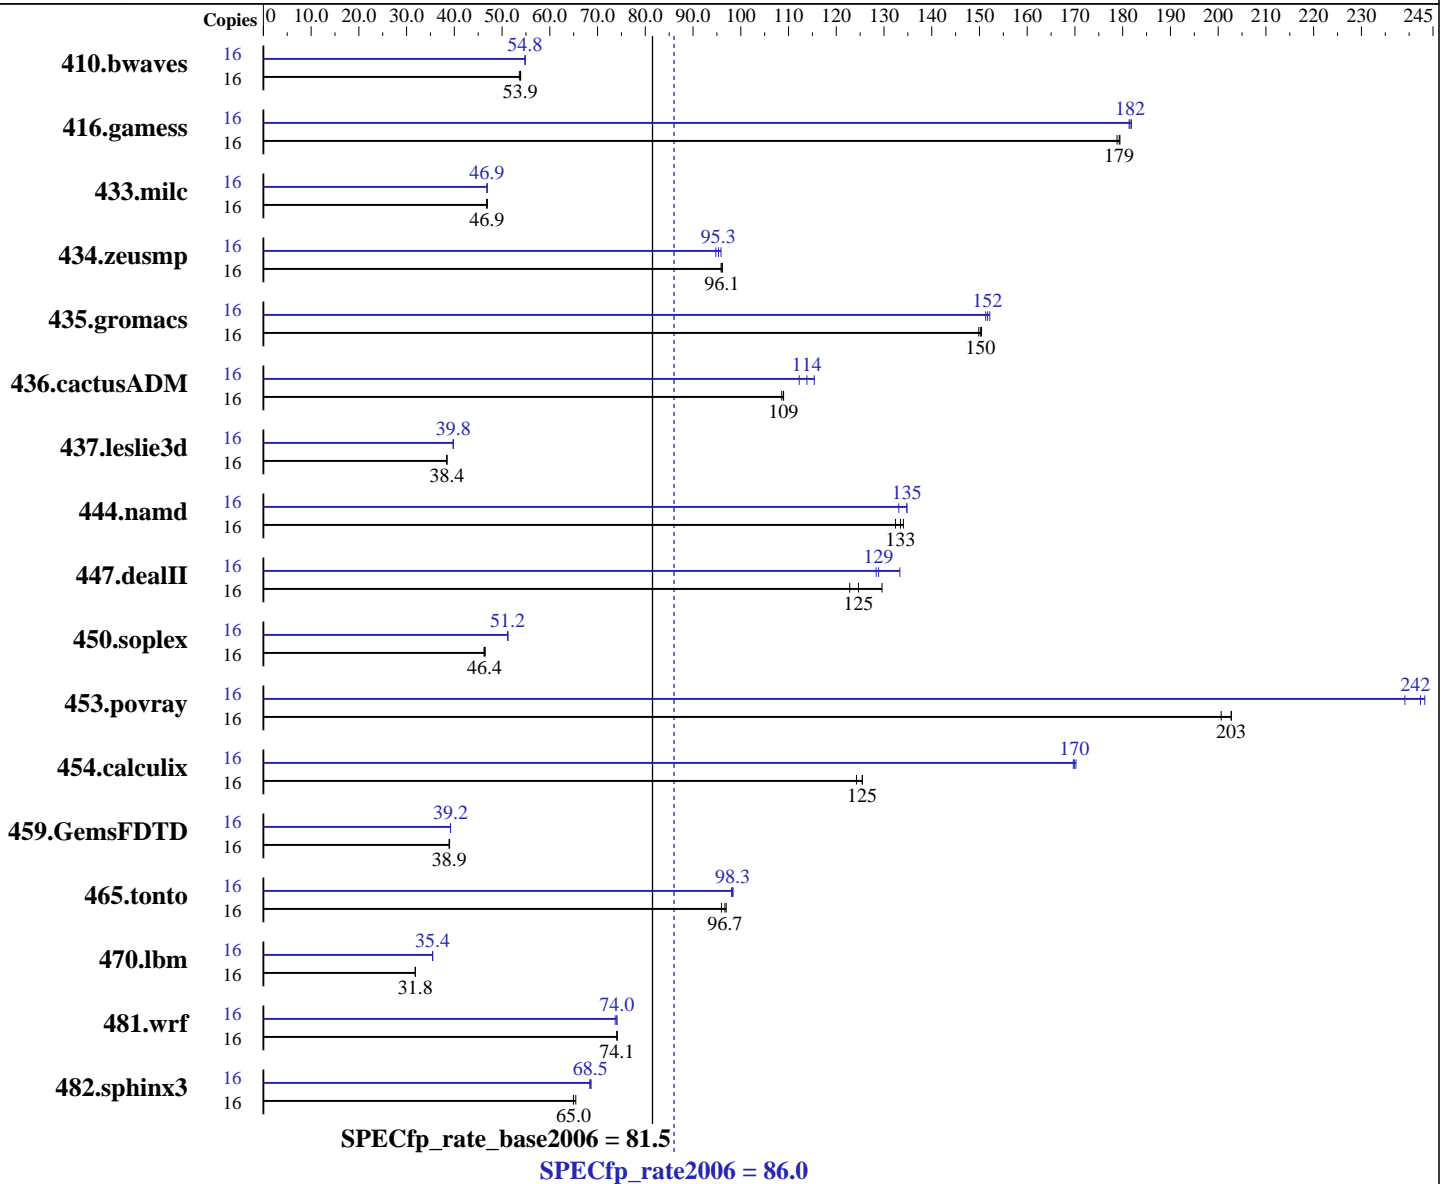

### Hardware

CPU Name: Intel Xeon E7310  
 CPU Characteristics: 1066 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (16 x 1GB 667 MHz ECC CL5 FB-DIMM)  
Disk Subsystem: 1 x 73 GB SAS 15K RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	4055	53.6	<b>4038</b>	<b>53.9</b>	4035	53.9	16	<b>3966</b>	<b>54.8</b>	3966	54.8	3966	54.8		
416.gamess	16	1746	179	1752	179	<b>1748</b>	<b>179</b>	16	1723	182	<b>1726</b>	<b>182</b>	1728	181		
433.milc	16	3142	46.8	3132	46.9	<b>3135</b>	<b>46.9</b>	16	<b>3134</b>	<b>46.9</b>	3133	46.9	3136	46.8		
434.zeusmp	16	1514	96.2	<b>1516</b>	<b>96.1</b>	1519	95.9	16	1519	95.9	<b>1527</b>	<b>95.3</b>	1536	94.8		
435.gromacs	16	<b>760</b>	<b>150</b>	759	150	762	150	16	755	151	751	152	<b>753</b>	<b>152</b>		
436.cactusADM	16	1761	109	1755	109	<b>1755</b>	<b>109</b>	16	1657	115	<b>1679</b>	<b>114</b>	1703	112		
437.leslie3d	16	3916	38.4	3912	38.4	<b>3912</b>	<b>38.4</b>	16	<b>3781</b>	<b>39.8</b>	3781	39.8	3778	39.8		
444.namd	16	957	134	<b>962</b>	<b>133</b>	969	132	16	<b>952</b>	<b>135</b>	952	135	964	133		
447.dealII	16	1490	123	<b>1468</b>	<b>125</b>	1412	130	16	1426	128	<b>1420</b>	<b>129</b>	1373	133		
450.soplex	16	2872	46.5	<b>2879</b>	<b>46.4</b>	2887	46.2	16	2609	51.2	<b>2608</b>	<b>51.2</b>	2604	51.2		
453.povray	16	424	201	<b>420</b>	<b>203</b>	420	203	16	350	243	<b>351</b>	<b>242</b>	356	239		
454.calculix	16	1063	124	<b>1052</b>	<b>125</b>	1052	125	16	<b>777</b>	<b>170</b>	776	170	778	170		
459.GemsFDTD	16	<b>4360</b>	<b>38.9</b>	4361	38.9	4352	39.0	16	<b>4331</b>	<b>39.2</b>	4332	39.2	4329	39.2		
465.tonto	16	<b>1629</b>	<b>96.7</b>	1641	96.0	1624	96.9	16	1606	98.1	<b>1601</b>	<b>98.3</b>	1600	98.4		
470.lbm	16	6911	31.8	<b>6907</b>	<b>31.8</b>	6901	31.9	16	<b>6201</b>	<b>35.4</b>	6203	35.4	6200	35.5		
481.wrf	16	<b>2412</b>	<b>74.1</b>	2413	74.1	2412	74.1	16	2425	73.7	2413	74.1	<b>2414</b>	<b>74.0</b>		
482.sphinx3	16	4800	65.0	4765	65.4	<b>4799</b>	<b>65.0</b>	16	4542	68.7	4560	68.4	<b>4555</b>	<b>68.5</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled (default Enabled)  
Hardware Prefetcher = Disabled (default Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 86.0

PowerEdge R900 (Intel Xeon E7310, 1.60 GHz)

SPECfp\_rate\_base2006 = 81.5

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:44:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 November 2007.