



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5440,2.83GHz)

SPECint®2006 = 25.5

SPECint\_base2006 = 22.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

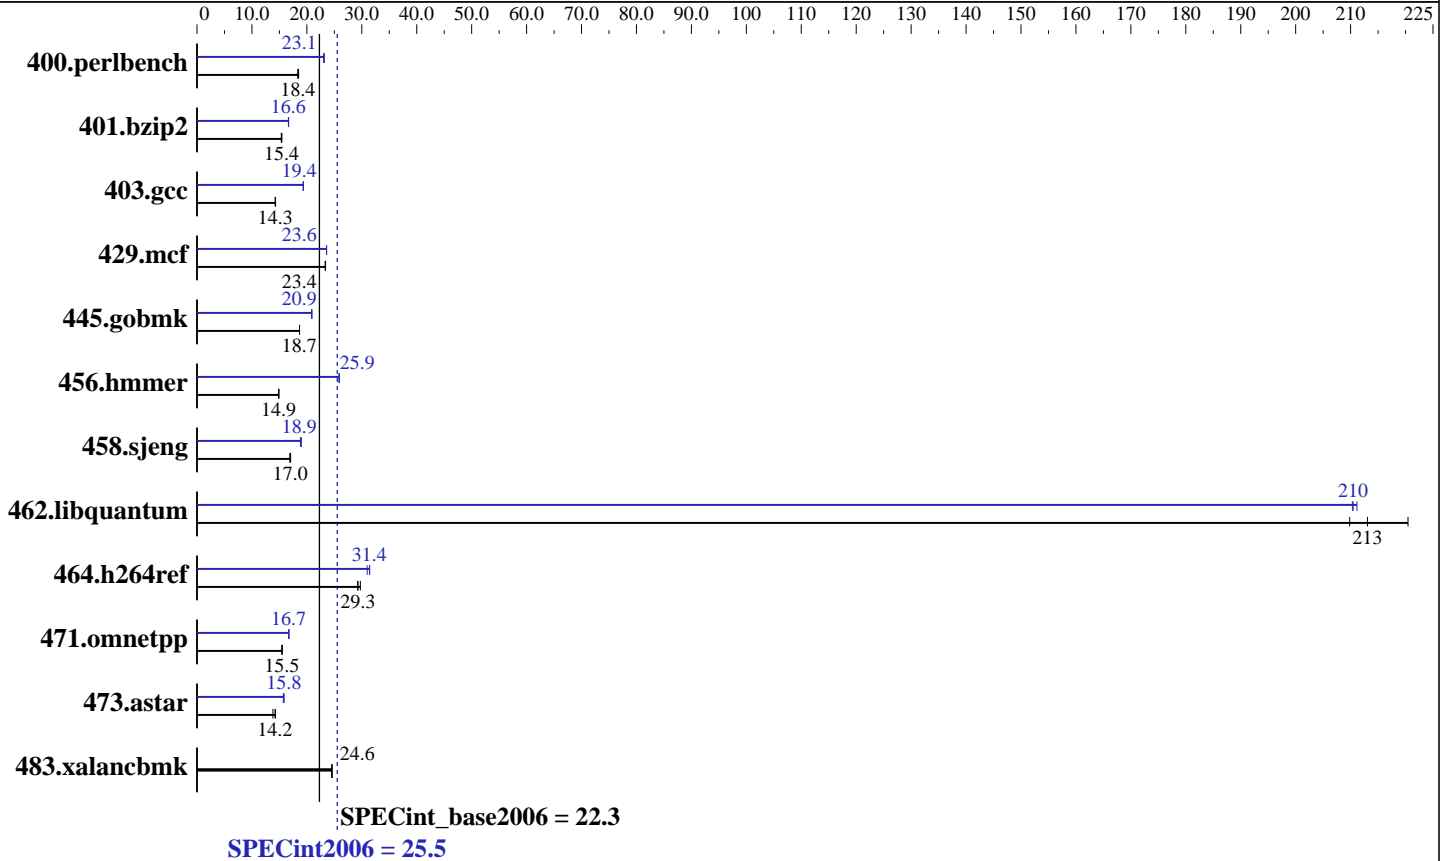

### Hardware

CPU Name: Intel Xeon E5440  
 CPU Characteristics: 2.83 GHz, 12 MB L2, 1333 MHz system bus  
 CPU MHz: 2833  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5  
 Disk Subsystem: 1x73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 SP1  
 Kernel 2.6.16.46-0.12-smp for x86\_64  
 Compiler: Intel C++ Compiler 10.1 for Linux  
 Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15  
 SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5440,2.83GHz)

SPECint2006 = 25.5

SPECint\_base2006 = 22.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	528	18.5	<u>531</u>	<u>18.4</u>	532	18.4	424	23.1	<u>423</u>	<u>23.1</u>	422	23.2
401.bzip2	629	15.3	625	15.4	<u>627</u>	<u>15.4</u>	578	16.7	<u>580</u>	<u>16.6</u>	580	16.6
403.gcc	565	14.3	563	14.3	<u>565</u>	<u>14.3</u>	416	19.4	416	19.3	<u>416</u>	<u>19.4</u>
429.mcf	<u>390</u>	<u>23.4</u>	391	23.4	390	23.4	387	23.6	387	23.6	<u>387</u>	<u>23.6</u>
445.gobmk	<u>562</u>	<u>18.7</u>	562	18.7	562	18.7	502	20.9	503	20.9	<u>502</u>	<u>20.9</u>
456.hmmer	<u>627</u>	<u>14.9</u>	627	14.9	627	14.9	360	25.9	360	25.9	<u>360</u>	<u>25.9</u>
458.sjeng	715	16.9	<u>713</u>	<u>17.0</u>	710	17.0	642	18.8	637	19.0	<u>640</u>	<u>18.9</u>
462.libquantum	<u>97.2</u>	<u>213</u>	98.7	210	94.0	220	98.5	210	98.1	211	<u>98.5</u>	<u>210</u>
464.h264ref	756	29.3	744	29.7	<u>755</u>	<u>29.3</u>	704	31.4	<u>705</u>	<u>31.4</u>	714	31.0
471.omnetpp	<u>403</u>	<u>15.5</u>	405	15.5	403	15.5	374	16.7	374	16.7	<u>374</u>	<u>16.7</u>
473.astar	<u>494</u>	<u>14.2</u>	492	14.3	508	13.8	<u>444</u>	<u>15.8</u>	447	15.7	444	15.8
483.xalancbmk	281	24.5	<u>281</u>	<u>24.6</u>	281	24.6	281	24.5	<u>281</u>	<u>24.6</u>	281	24.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores (default)

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode  
The taskset utility was used to bind processes to cores

The Bull NovaScale R440 E1 (Intel Xeon E5440,2.83GHz) and the Bull NovaScale R460 E1 (Intel Xeon E5440,2.83GHz) models are electronically equivalent. The results have been measured on a Bull NovaScale R460 E1 (Intel Xeon E5440,2.83GHz) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5440,2.83GHz)

SPECint2006 = 25.5

SPECint\_base2006 = 22.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -vec-guard-write -parallel -par-runtime-control  
C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include  
456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include  
C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5440,2.83GHz)

SPECint2006 = 25.5

SPECint\_base2006 = 22.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5440,2.83GHz)

SPECint2006 = 25.5

SPECint\_base2006 = 22.3

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Mar-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:04:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 April 2008.