SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M5000

SPECint®_rate2006 = 264

SPECint_rate_base2006 = 232

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

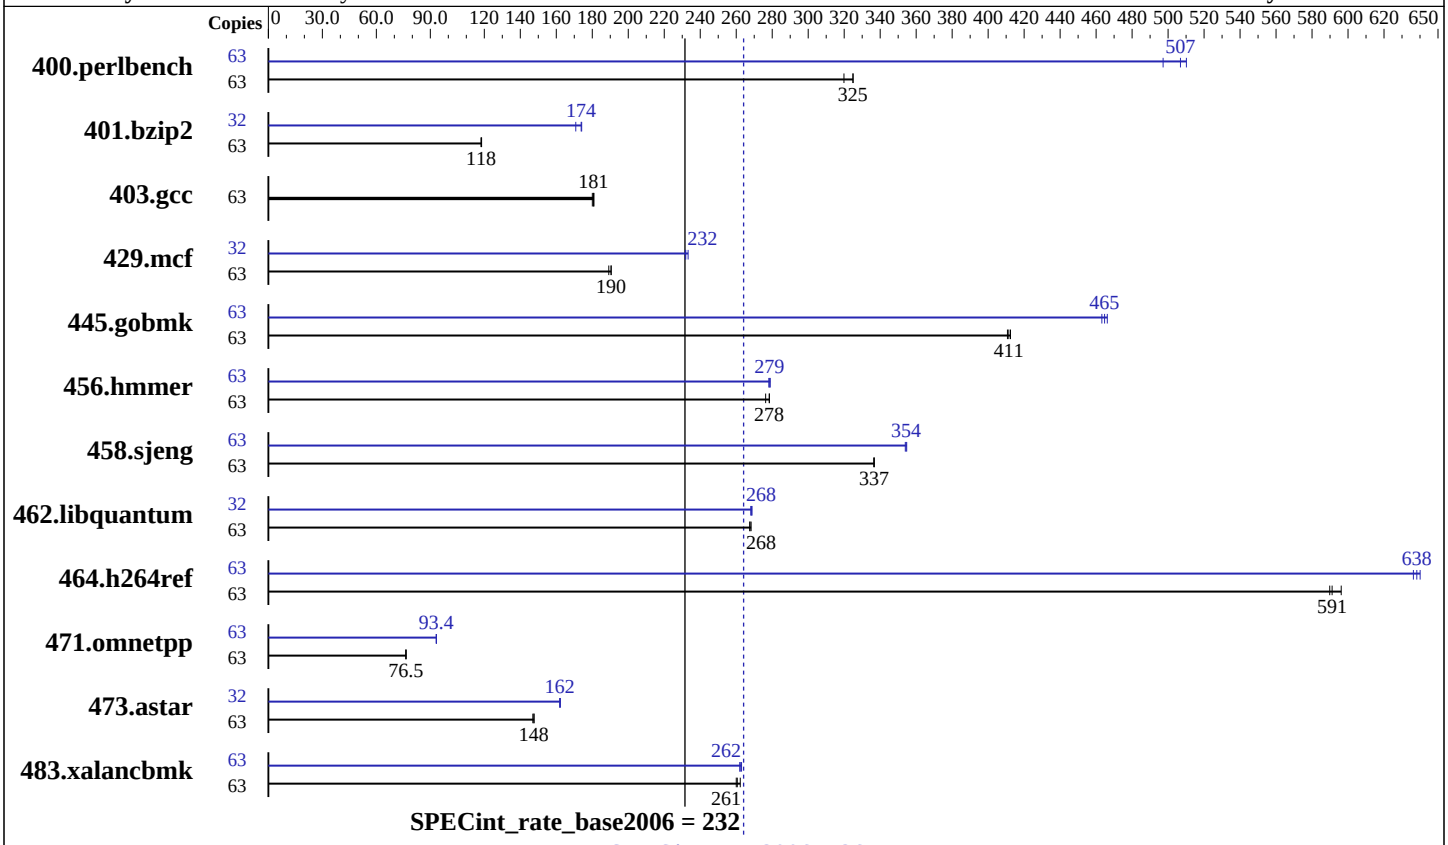

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	32 cores, 8 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 4 CMU; each CMU contains 2 CPU chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	128 GB (64 x 2 GB)
Disk Subsystem:	158 GB RAID 0 Solaris Volume 3 x Seagate 73 GB 10000 RPM Stripe interlace 512 Kbytes
Other Hardware:	None

Software

Operating System:	Solaris 10 5/08 with patch 137111-03
Compiler:	Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	63	**1895**	**325**	1894	325	1924	320	63	1238	497	**1214**	**507**	1206	510
401.bzip2	63	**5141**	**118**	5131	118	5141	118	32	1808	171	1774	174	**1777**	**174**
403.gcc	63	2817	180	2803	181	**2807**	**181**	63	2817	180	2803	181	**2807**	**181**
429.mcf	63	3016	190	3037	189	**3017**	**190**	32	**1258**	**232**	1251	233	1259	232
445.gobmk	63	1602	412	**1606**	**411**	1609	411	63	1427	463	**1422**	**465**	1418	466
456.hmmer	63	**2112**	**278**	2127	276	2111	278	63	2114	278	2108	279	**2110**	**279**
458.sjeng	63	**2264**	**337**	2265	336	2264	337	63	2149	355	2154	354	**2151**	**354**
462.libquantum	63	**4877**	**268**	4880	267	4866	268	32	**2470**	**268**	2467	269	2473	268
464.h264ref	63	**2358**	**591**	2338	596	2364	590	63	**2184**	**638**	2191	636	2178	640
471.omnetpp	63	**5150**	**76.5**	5156	76.4	5143	76.6	63	4224	93.2	**4216**	**93.4**	4214	93.4
473.astar	63	3009	147	2995	148	**2997**	**148**	32	**1387**	**162**	1387	162	1384	162
483.xalancbmk	63	**1668**	**261**	1672	260	1658	262	63	1653	263	1659	262	**1658**	**262**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Sun Studio compiler patches are available at
    http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.  The
config file option 'submit' was used, along with a list of processors in the
'BIND' variable, to generate the pbind commands.  (For details, please see
the config file.)
```

Operating System Notes

```
Environment Variable Settings:

ulimit -s 131072 was used to limit the space consumed
    by the stack (making more space available for the heap)

System Tunables (/etc/system parameters):

tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=600
    Causes pages older than the listed number of seconds to
```

Continued on next page

Operating System Notes (Continued)

```
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache
lpg_alloc_prefer=1
    Set lgroup page allocation to strongly prefer local pages

Other System Settings:

The webconsole service was turned off using
    svcadm disable webconsole
```

Platform Notes

```
Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M5000 Server.
Note that the Sun SPARC Enterprise M5000 and Fujitsu SPARC Enterprise
M5000 are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_SOLARIS_SPARC`
403.gcc: `-DSPEC_CPU_SOLARIS`
462.libquantum: `-DSPEC_CPU_SOLARIS`
483.xalancbmk: `-DSPEC_CPU_SOLARIS`

Base Optimization Flags

C benchmarks:
`-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1 -xalias_level=std -ll2amm`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:
-xjobs=16 -V -#

C++ benchmarks:
-xjobs=16 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xipo=2 -xrestrict -fma=fused -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=strong -fma=fused

403.gcc: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: -fast -xpagesize=4M -xipo=2 -xprefetch=no -xrestrict
-xalias_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xrestrict -fma=fused -ll2amm

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -fma=fused

458.sjeng: Same as 456.hmmer

462.libquantum: -fast -xpagesize=4M -xipo=2 -xprefetch=no -fma=fused
-lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std -xprefetch=no -ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-Qoption cg -Qlp-av=0 -fma=fused -lfast

473.astar: -xdepend -library=stlport4 -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fma=fused -lfast

483.xalancbmk: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch=no -fma=fused
-lfast

Peak Other Flags

C benchmarks:
-xjobs=16 -V -#

C++ benchmarks:
-xjobs=16 -verbose=diags,version

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.00.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.00.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:51:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.