



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 74.8

ACTINA SOLAR 442 S3 (Intel Xeon E7220, 2.93 GHz)

SPECint_rate_base2006 = 62.6

CPU2006 license: 3388


Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

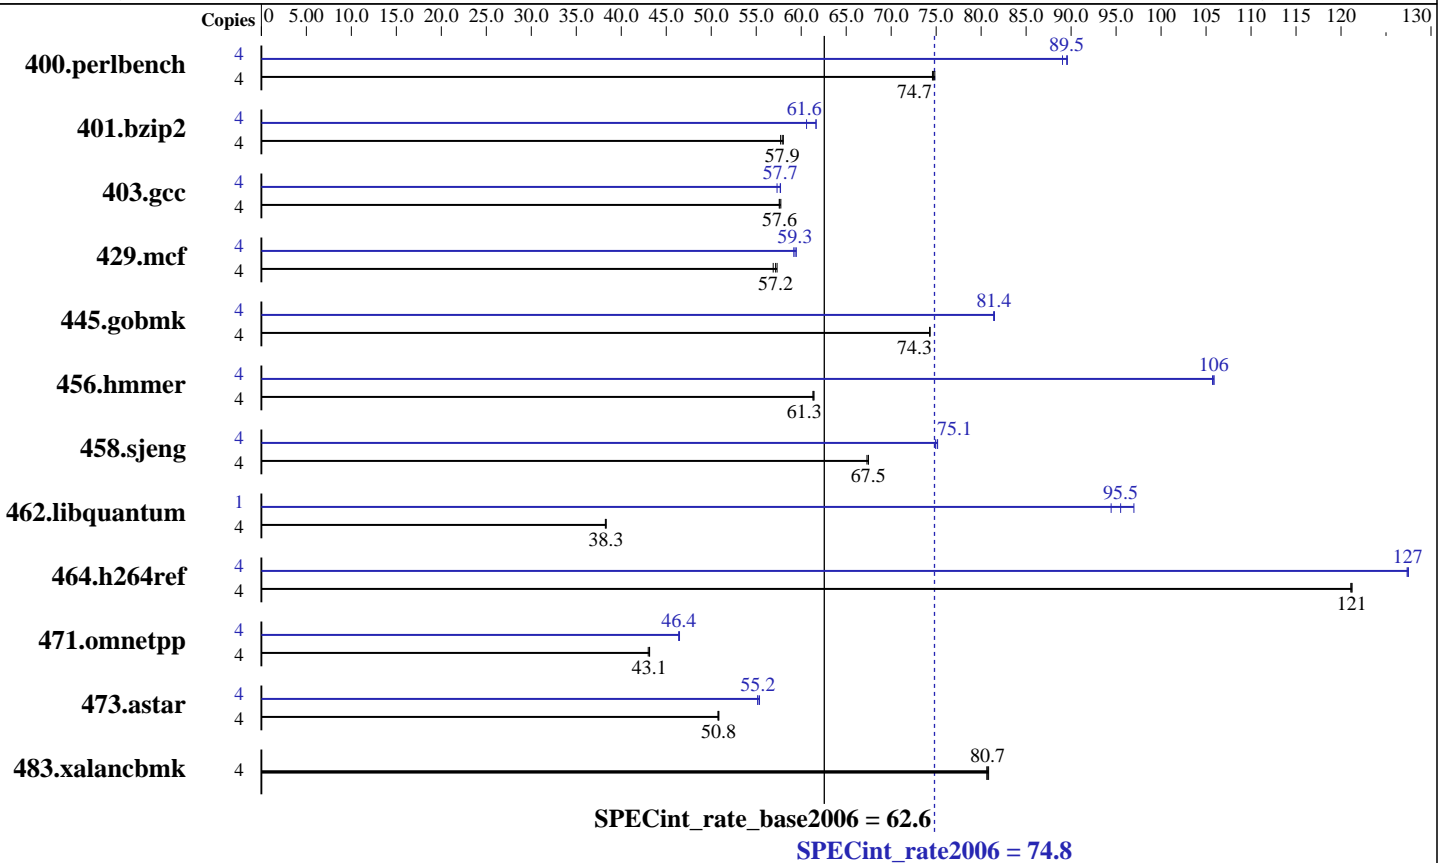

Hardware

CPU Name: Intel Xeon E7220
 CPU Characteristics: 1066 MHz bus
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x 2 GB PC2-5300 ECC FBDIMM)
 Disk Subsystem: 1x 250 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 74.8

ACTINA SOLAR 442 S3 (Intel Xeon E7220, 2.93 GHz)

SPECint_rate_base2006 = 62.6

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	524	74.6	<u>523</u>	<u>74.7</u>	522	74.9	4	<u>437</u>	<u>89.5</u>	436	89.6	439	89.0
401.bzip2	4	669	57.7	665	58.0	<u>667</u>	<u>57.9</u>	4	637	60.6	<u>626</u>	<u>61.6</u>	626	61.7
403.gcc	4	558	57.7	<u>559</u>	<u>57.6</u>	559	57.6	4	558	57.7	562	57.3	<u>558</u>	<u>57.7</u>
429.mcf	4	<u>638</u>	<u>57.2</u>	636	57.3	641	56.9	4	<u>615</u>	<u>59.3</u>	614	59.5	616	59.2
445.gobmk	4	<u>565</u>	<u>74.3</u>	565	74.3	565	74.3	4	<u>515</u>	<u>81.4</u>	515	81.4	515	81.5
456.hammer	4	609	61.3	608	61.4	<u>608</u>	<u>61.3</u>	4	352	106	353	106	<u>353</u>	<u>106</u>
458.sjeng	4	<u>717</u>	<u>67.5</u>	719	67.3	717	67.5	4	646	74.9	<u>644</u>	<u>75.1</u>	644	75.2
462.libquantum	4	<u>2164</u>	<u>38.3</u>	2168	38.2	2163	38.3	1	214	97.0	219	94.4	<u>217</u>	<u>95.5</u>
464.h264ref	4	730	121	731	121	<u>730</u>	<u>121</u>	4	694	127	<u>695</u>	<u>127</u>	695	127
471.omnetpp	4	581	43.0	<u>580</u>	<u>43.1</u>	579	43.2	4	539	46.4	538	46.5	<u>539</u>	<u>46.4</u>
473.astar	4	552	50.8	553	50.7	<u>553</u>	<u>50.8</u>	4	507	55.4	509	55.2	<u>509</u>	<u>55.2</u>
483.xalancbmk	4	341	80.8	<u>342</u>	<u>80.7</u>	342	80.6	4	341	80.8	<u>342</u>	<u>80.7</u>	342	80.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode.
Taskset command was used to bind processes to CPUs.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 74.8

ACTINA SOLAR 442 S3 (Intel Xeon E7220, 2.93 GHz)

SPECint_rate_base2006 = 62.6

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

```
456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:

icpc

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 74.8

ACTINA SOLAR 442 S3 (Intel Xeon E7220, 2.93 GHz)

SPECint_rate_base2006 = 62.6

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 74.8

ACTINA SOLAR 442 S3 (Intel Xeon E7220, 2.93 GHz)

SPECint_rate_base2006 = 62.6

CPU2006 license: 3388

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Aug-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:03:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.