



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Solo ULV SU3500)

SPECfp_rate_base2006 = 10.3

CPU2006 license: 13


Test date: May-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

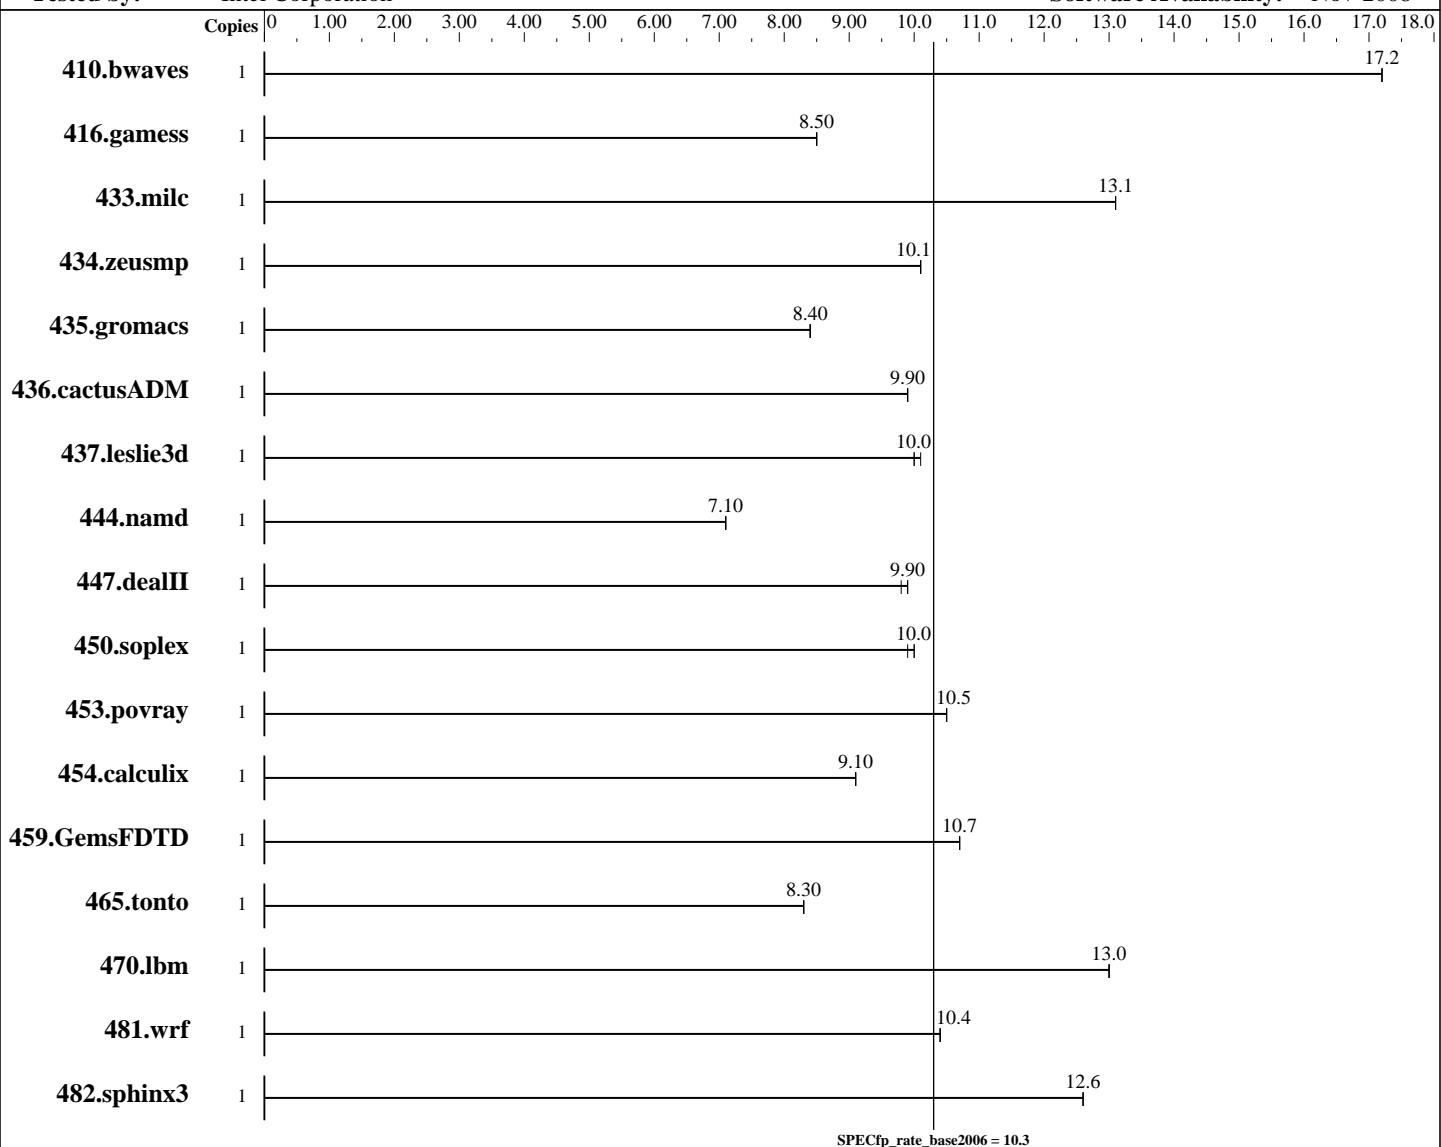

Hardware

CPU Name: Intel Core 2 Solo ULV SU3500
 CPU Characteristics:
 CPU MHz: 1400
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per chip
 Secondary Cache: 3 MB I+D on chip per chip

Software

Operating System: Windows Vista Home Premium w/ SP1 (32-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0
 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: No
 File System: NTFS

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Solo ULV SU3500)

SPECfp_rate_base2006 = 10.3

CPU2006 license: 13

Test date: May-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2x1GB DDR3-1066 CL7; bios sets it to DDR2-800 CL5)
 Disk Subsystem: ST9250315AS 250 GB SATA, 5400RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1	788	17.2	789	17.2	<u>789</u>	<u>17.2</u>							
416.gamess	1	2290	8.50	2292	8.50	<u>2291</u>	<u>8.50</u>							
433.milc	1	701	13.1	700	13.1	<u>700</u>	<u>13.1</u>							
434.zeusmp	1	901	10.1	<u>901</u>	<u>10.1</u>	900	10.1							
435.gromacs	1	848	8.40	<u>847</u>	<u>8.40</u>	847	8.40							
436.cactusADM	1	<u>1203</u>	<u>9.90</u>	1203	9.90	1202	9.90							
437.leslie3d	1	<u>935</u>	<u>10.0</u>	937	10.0	935	10.1							
444.namd	1	<u>1130</u>	<u>7.10</u>	1130	7.10	1129	7.10							
447.dealII	1	<u>1161</u>	<u>9.90</u>	1162	9.80	1159	9.90							
450.soplex	1	839	9.90	837	10.0	<u>838</u>	<u>10.0</u>							
453.povray	1	506	10.5	<u>506</u>	<u>10.5</u>	508	10.5							
454.calculix	1	906	9.10	<u>907</u>	<u>9.10</u>	908	9.10							
459.GemsFDTD	1	988	10.7	990	10.7	<u>989</u>	<u>10.7</u>							
465.tonto	1	1182	8.30	1181	8.30	<u>1181</u>	<u>8.30</u>							
470.lbm	1	<u>1059</u>	<u>13.0</u>	1060	13.0	1059	13.0							
481.wrf	1	<u>1071</u>	<u>10.4</u>	1072	10.4	1071	10.4							
482.sphinx3	1	1545	12.6	<u>1544</u>	<u>12.6</u>	1542	12.6							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

The system bus runs at 800 MHz
 Binaries were built on Windows Vista Ultimate (32-bit)

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation Acer Aspire 3810T (Intel Core 2 Solo ULV SU3500)	SPECfp_rate2006 = Not Run SPECfp_rate_base2006 = 10.3
CPU2006 license: 13 Test sponsor: Intel Corporation Tested by: Intel Corporation	Test date: May-2009 Hardware Availability: May-2009 Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks: *icl -Ovc9*

Fortran benchmarks: ifort

Benchmarks using both Fortran and C:
 `icl -Ovc9 -Oc99 ifort`

Base Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore  
        444.namd: -TP  
        447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG  
        453.povray: -DSPEC_CPU_WINDOWS_ICL  
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase  
        481.wrf: -DSPEC_CPU_WINDOWS_ICL
```

Base Optimization Flags

C benchmarks:

-QxsSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

C++ benchmarks:

Fortran benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:

-QxsSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F10000000000

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Solo ULV SU3500)

SPECfp_rate_base2006 = 10.3

CPU2006 license: 13

Test date: May-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:13:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.