



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp<sup>®</sup>\_rate2006 = 129

A+ Server 1021M-UR+B, AMD Opteron 2425 HE

SPECfp\_rate\_base2006 = 117

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

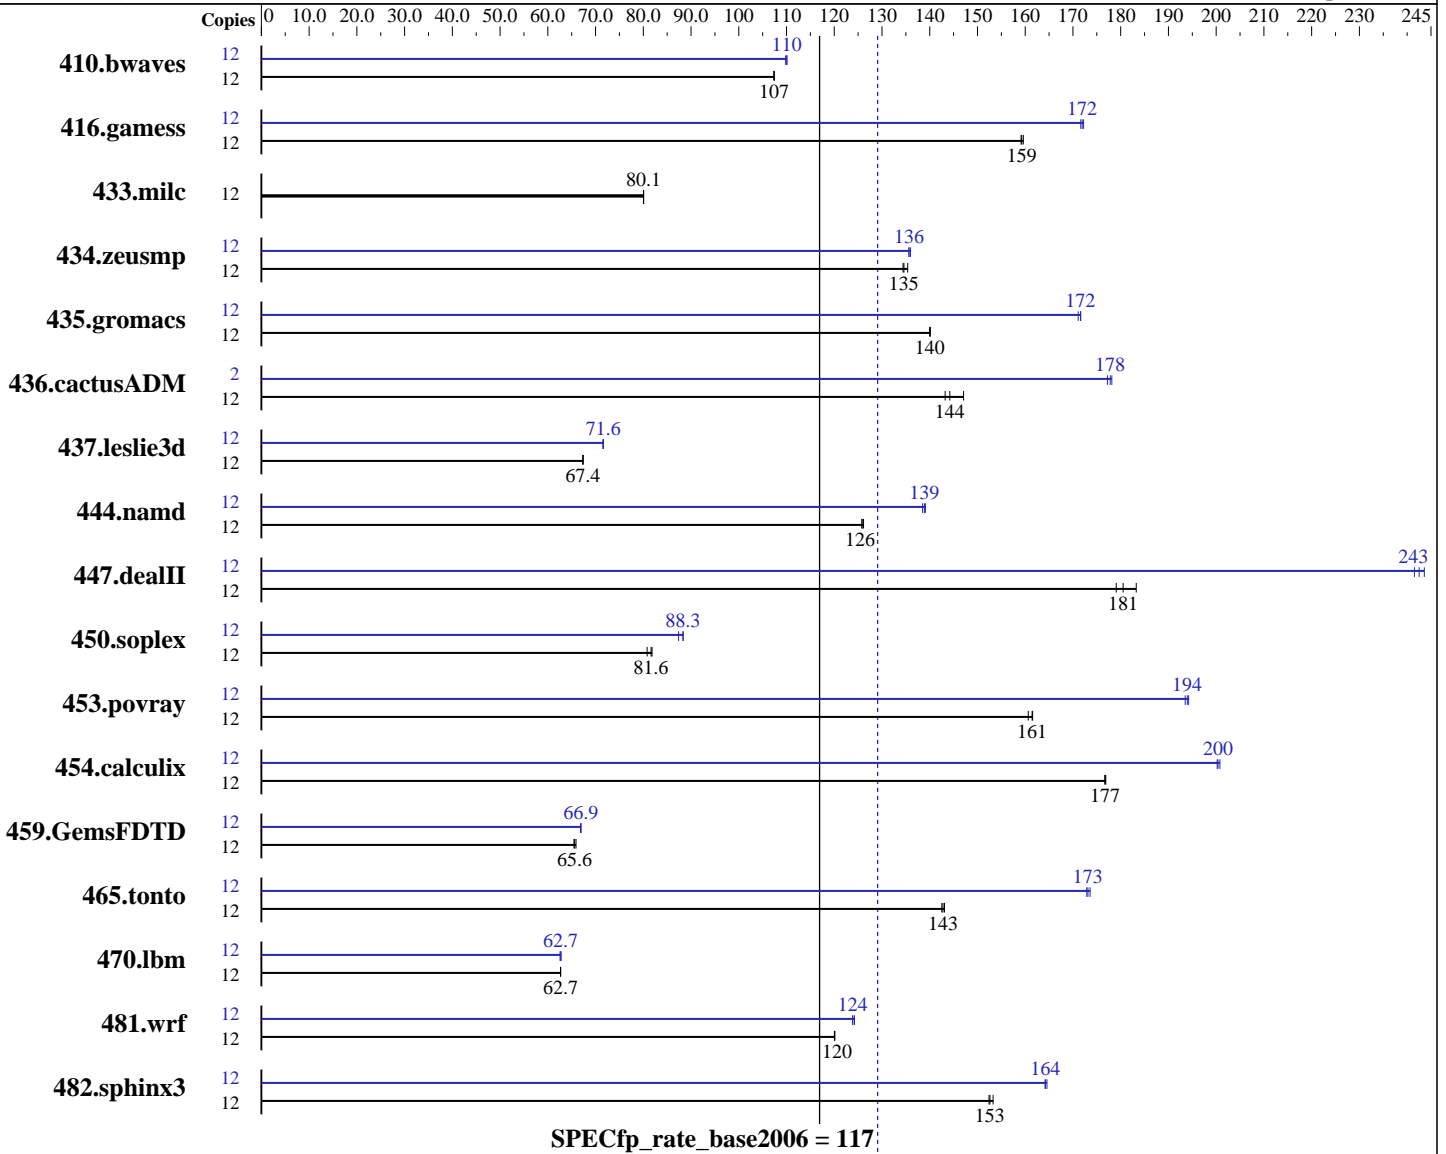

### Hardware

CPU Name: AMD Opteron 2425 HE  
 CPU Characteristics:  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 129

A+ Server 1021M-UR+B, AMD Opteron 2425 HE

SPECfp\_rate\_base2006 = 117

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1518	107	1519	107	<b>1518</b>	<b>107</b>	12	1485	110	1481	110	<b>1482</b>	<b>110</b>
416.gamess	12	<b>1475</b>	<b>159</b>	1476	159	1472	160	12	<b>1367</b>	<b>172</b>	1364	172	1369	172
433.milc	12	1376	80.1	<b>1376</b>	<b>80.1</b>	1376	80.0	12	1376	80.1	<b>1376</b>	<b>80.1</b>	1376	80.0
434.zeusmp	12	812	134	807	135	<b>811</b>	<b>135</b>	12	<b>805</b>	<b>136</b>	803	136	805	136
435.gromacs	12	<b>612</b>	<b>140</b>	612	140	612	140	12	501	171	<b>499</b>	<b>172</b>	499	172
436.cactusADM	12	1001	143	975	147	<b>994</b>	<b>144</b>	2	134	178	<b>134</b>	<b>178</b>	135	177
437.leslie3d	12	1675	67.3	1674	67.4	<b>1674</b>	<b>67.4</b>	12	1575	71.6	1576	71.6	<b>1576</b>	<b>71.6</b>
444.namd	12	763	126	<b>765</b>	<b>126</b>	765	126	12	695	139	<b>693</b>	<b>139</b>	692	139
447.dealII	12	767	179	<b>761</b>	<b>181</b>	749	183	12	568	242	564	244	<b>566</b>	<b>243</b>
450.soplex	12	1239	80.8	<b>1226</b>	<b>81.6</b>	1223	81.8	12	1145	87.4	<b>1134</b>	<b>88.3</b>	1133	88.4
453.povray	12	395	162	<b>395</b>	<b>161</b>	397	161	12	330	194	329	194	<b>329</b>	<b>194</b>
454.calculix	12	<b>560</b>	<b>177</b>	560	177	560	177	12	493	201	494	200	<b>494</b>	<b>200</b>
459.GemsFDTD	12	1945	65.5	1932	65.9	<b>1940</b>	<b>65.6</b>	12	1904	66.9	1902	66.9	<b>1903</b>	<b>66.9</b>
465.tonto	12	<b>827</b>	<b>143</b>	828	143	825	143	12	680	174	<b>682</b>	<b>173</b>	683	173
470.lbm	12	<b>2631</b>	<b>62.7</b>	2630	62.7	2631	62.7	12	2635	62.6	2627	62.8	<b>2629</b>	<b>62.7</b>
481.wrf	12	1117	120	<b>1116</b>	<b>120</b>	1116	120	12	1082	124	1079	124	<b>1082</b>	<b>124</b>
482.sphinx3	12	<b>1533</b>	<b>153</b>	1526	153	1534	152	12	1421	165	1425	164	<b>1424</b>	<b>164</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 129**

**A+ Server 1021M-UR+B, AMD Opteron 2425 HE**

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** May-2009

**Hardware Availability:** Jul-2009

**Software Availability:** Apr-2009

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.1/amd0905is-libs/64:/root/work/cpu2006v1.1/amd0905is-libs/32"

NCPUS = "6"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 129

A+ Server 1021M-UR+B, AMD Opteron 2425 HE

SPECfp\_rate\_base2006 = 117

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

## Base Optimization Flags

### C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

### C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

### Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

### Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

### C benchmarks:

-Mipa=jobs:4

### C++ benchmarks:

-Mipa=jobs:4

### Fortran benchmarks:

-Mipa=jobs:4

### Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

### C benchmarks:

pgcc

### C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

### Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 129

A+ Server 1021M-UR+B, AMD Opteron 2425 HE

SPECfp\_rate\_base2006 = 117

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
-tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 129**

**A+ Server 1021M-UR+B, AMD Opteron 2425 HE**

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** May-2009

**Hardware Availability:** Jul-2009

**Software Availability:** Apr-2009

## Peak Optimization Flags (Continued)

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
-GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 129

A+ Server 1021M-UR+B, AMD Opteron 2425 HE

SPECfp\_rate\_base2006 = 117

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 129**

**A+ Server 1021M-UR+B, AMD Opteron 2425 HE**

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** May-2009

**Hardware Availability:** Jul-2009

**Software Availability:** Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:04:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 July 2009.