



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]_rate2006 = 208

IBM System x3550 M2 (Intel Xeon L5530)

SPECint_rate_base2006 = 194

CPU2006 license: 11


Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Sep-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

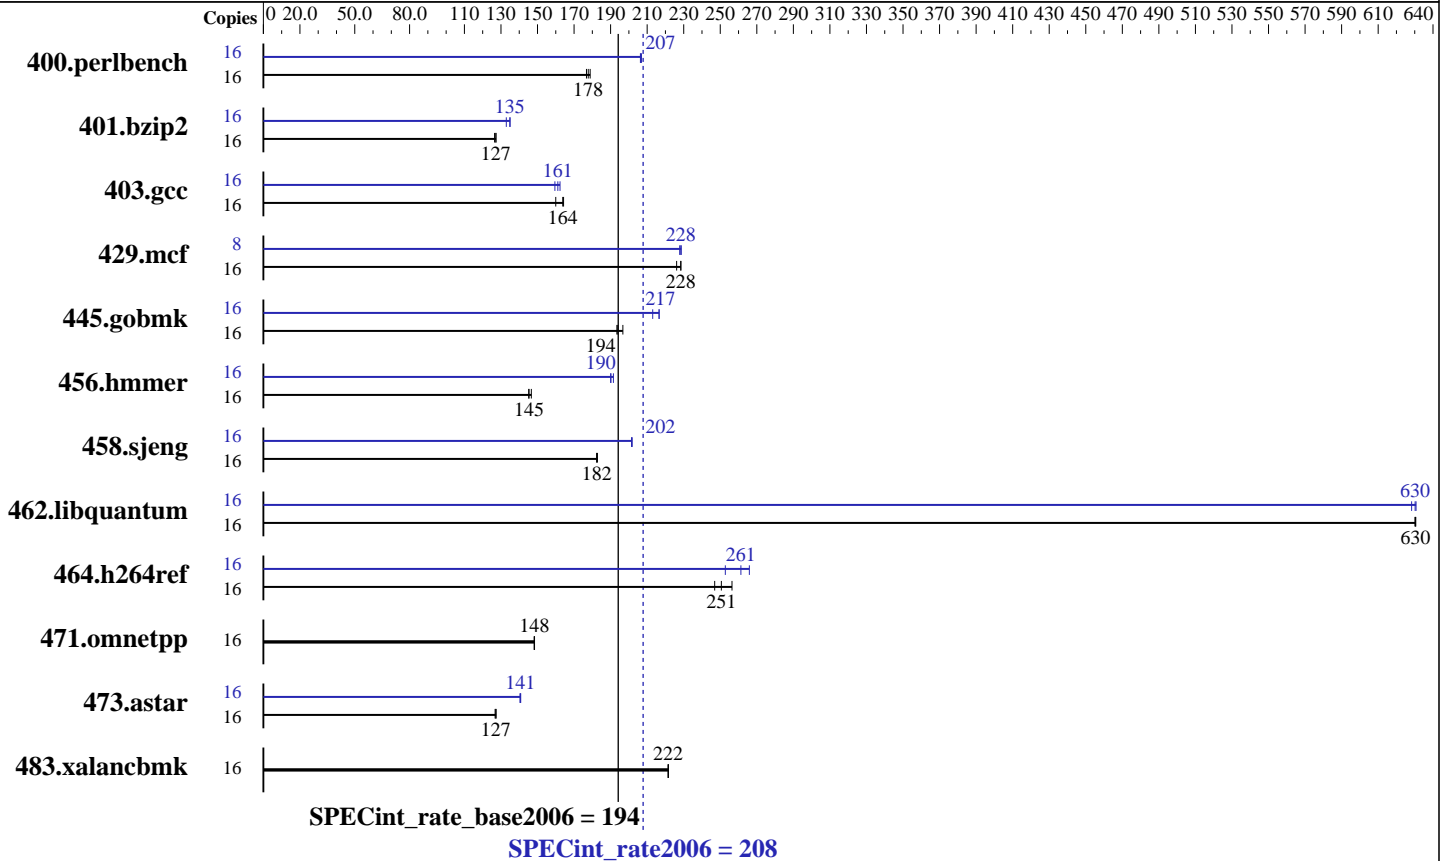

Hardware

CPU Name: Intel Xeon L5530
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB(6 x 4 GB DDR3-10600R, 2 Rank, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 208

IBM System x3550 M2 (Intel Xeon L5530)

SPECint_rate_base2006 = 194

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	879	178	874	179	884	177	16	758	206	756	207	757	207
401.bzip2	16	1214	127	1221	127	1213	127	16	1162	133	1144	135	1145	135
403.gcc	16	784	164	786	164	805	160	16	799	161	793	162	807	160
429.mcf	16	639	228	645	226	639	228	8	319	228	320	228	319	229
445.gobmk	16	853	197	865	194	868	193	16	775	217	788	213	775	217
456.hammer	16	1018	147	1027	145	1028	145	16	779	192	786	190	785	190
458.sjeng	16	1059	183	1061	182	1061	182	16	961	201	960	202	960	202
462.libquantum	16	526	630	526	630	526	631	16	528	628	526	630	526	631
464.h264ref	16	1434	247	1381	256	1413	251	16	1332	266	1355	261	1401	253
471.omnetpp	16	675	148	674	148	674	148	16	675	148	674	148	674	148
473.astar	16	882	127	886	127	883	127	16	798	141	800	140	798	141
483.xalanbmk	16	498	222	498	221	498	222	16	498	222	498	221	498	222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Turbo Mode Enable
CPU C-State Enable

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 208

IBM System x3550 M2 (Intel Xeon L5530)

SPECint_rate_base2006 = 194

CPU2006 license: 11

Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Sep-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 208

IBM System x3550 M2 (Intel Xeon L5530)

SPECint_rate_base2006 = 194

CPU2006 license: 11

Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Sep-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 208

IBM System x3550 M2 (Intel Xeon L5530)

SPECint_rate_base2006 = 194

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2009

Hardware Availability: Sep-2009

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:18:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2009.