



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

SPECfp<sup>®</sup>\_rate2006 = 120

SPECfp\_rate\_base2006 = 116

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

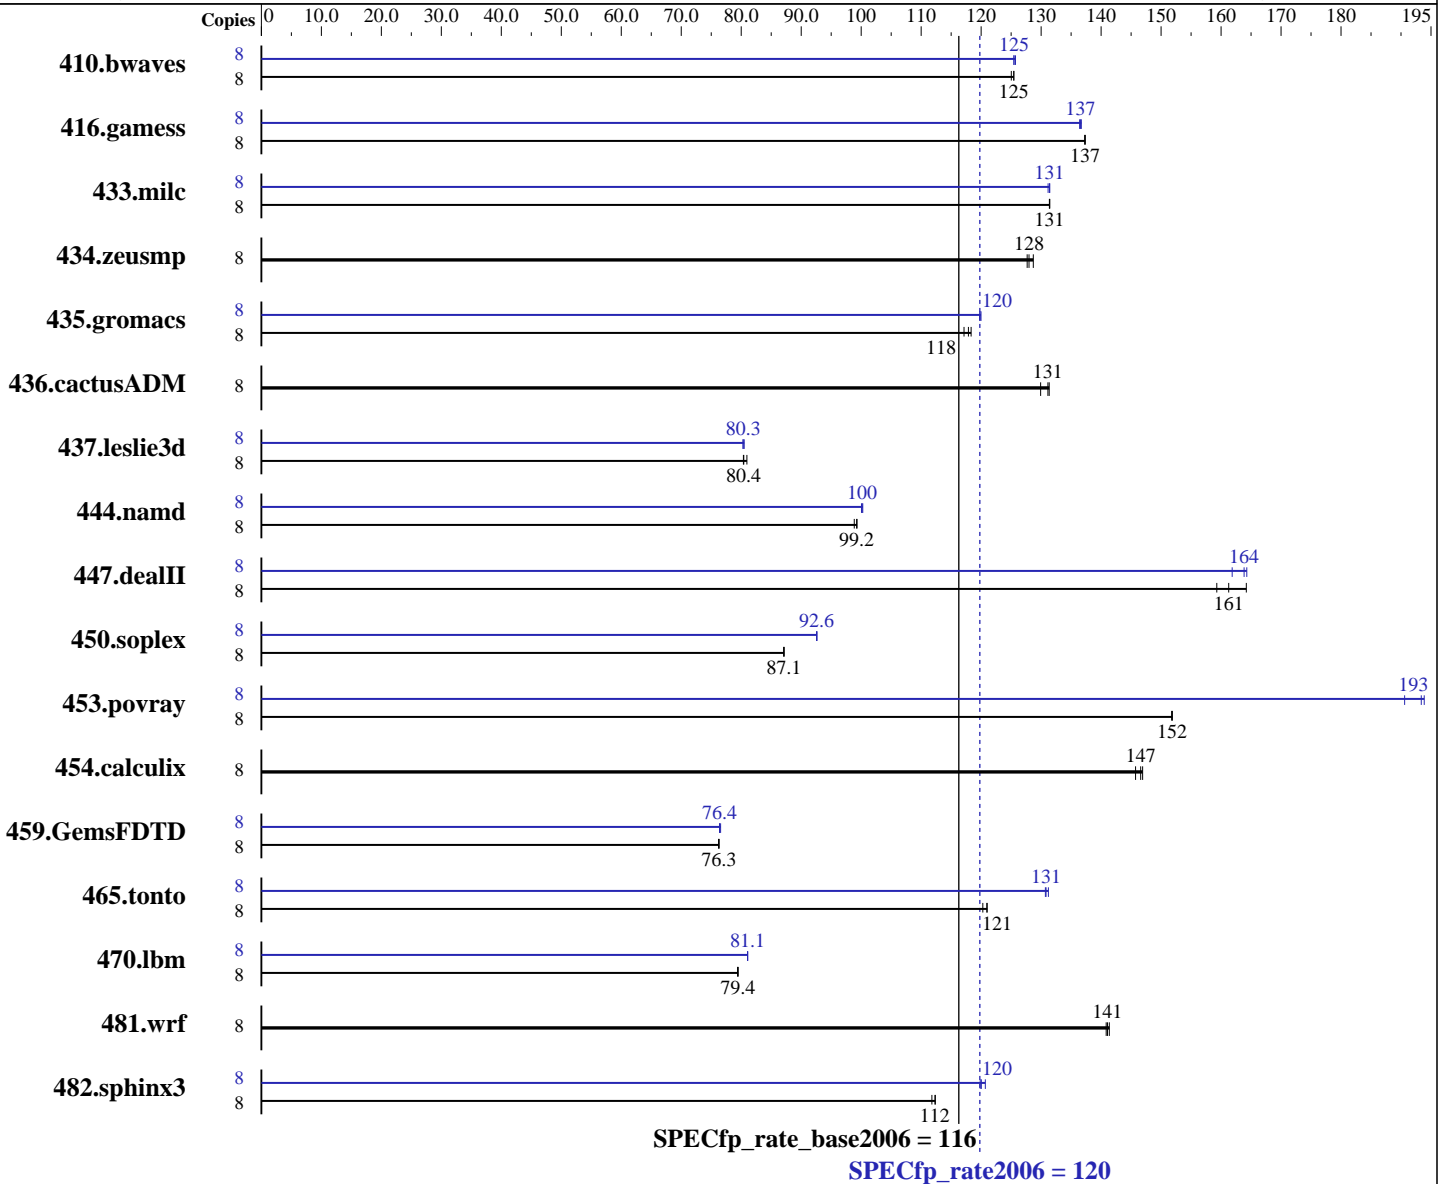

### Hardware

CPU Name: Intel Xeon E5506  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

SPECfp\_rate2006 = 120

SPECfp\_rate\_base2006 = 116

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 800 MHz)  
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	870	125	<b>867</b>	<b>125</b>	867	125	8	<b>866</b>	<b>125</b>	867	125	865	126
416.gamess	8	1141	137	<b>1141</b>	<b>137</b>	1141	137	8	1148	136	<b>1147</b>	<b>137</b>	1146	137
433.milc	8	<b>559</b>	<b>131</b>	559	131	559	131	8	560	131	559	131	<b>559</b>	<b>131</b>
434.zeusmp	8	<b>569</b>	<b>128</b>	566	129	570	128	8	<b>569</b>	<b>128</b>	566	129	570	128
435.gromacs	8	483	118	<b>485</b>	<b>118</b>	488	117	8	476	120	477	120	<b>477</b>	<b>120</b>
436.cactusADM	8	<b>729</b>	<b>131</b>	728	131	736	130	8	<b>729</b>	<b>131</b>	728	131	736	130
437.leslie3d	8	929	80.9	936	80.4	<b>935</b>	<b>80.4</b>	8	936	80.3	934	80.5	<b>936</b>	<b>80.3</b>
444.namd	8	649	98.8	<b>646</b>	<b>99.2</b>	646	99.3	8	641	100	640	100	<b>641</b>	<b>100</b>
447.dealII	8	<b>567</b>	<b>161</b>	575	159	557	164	8	<b>559</b>	<b>164</b>	557	164	565	162
450.soplex	8	<b>766</b>	<b>87.1</b>	766	87.1	766	87.1	8	721	92.6	720	92.6	<b>721</b>	<b>92.6</b>
453.povray	8	280	152	<b>280</b>	<b>152</b>	280	152	8	<b>220</b>	<b>193</b>	220	194	223	191
454.calculix	8	<b>450</b>	<b>147</b>	449	147	453	146	8	<b>450</b>	<b>147</b>	449	147	453	146
459.GemsFDTD	8	<b>1113</b>	<b>76.3</b>	1114	76.2	1112	76.3	8	1109	76.6	<b>1111</b>	<b>76.4</b>	1111	76.4
465.tonto	8	651	121	<b>651</b>	<b>121</b>	654	120	8	600	131	<b>602</b>	<b>131</b>	602	131
470.lbm	8	1383	79.5	1384	79.4	<b>1384</b>	<b>79.4</b>	8	<b>1356</b>	<b>81.1</b>	1356	81.1	1356	81.1
481.wrf	8	<b>633</b>	<b>141</b>	634	141	632	141	8	<b>633</b>	<b>141</b>	634	141	632	141
482.sphinx3	8	1388	112	<b>1388</b>	<b>112</b>	1395	112	8	1292	121	<b>1299</b>	<b>120</b>	1301	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Bull NovaScale R460 F2 model.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

**SPECfp\_rate2006 = 120**

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** Mar-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

**SPECfp\_rate2006 = 120**

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** Mar-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

**SPECfp\_rate2006 = 120**

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** Mar-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R710  
(Intel Xeon E5506, 2.13 GHz)

**SPECfp\_rate2006 = 120**

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** Mar-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:44:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 April 2010.