



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp[®]_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97


Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

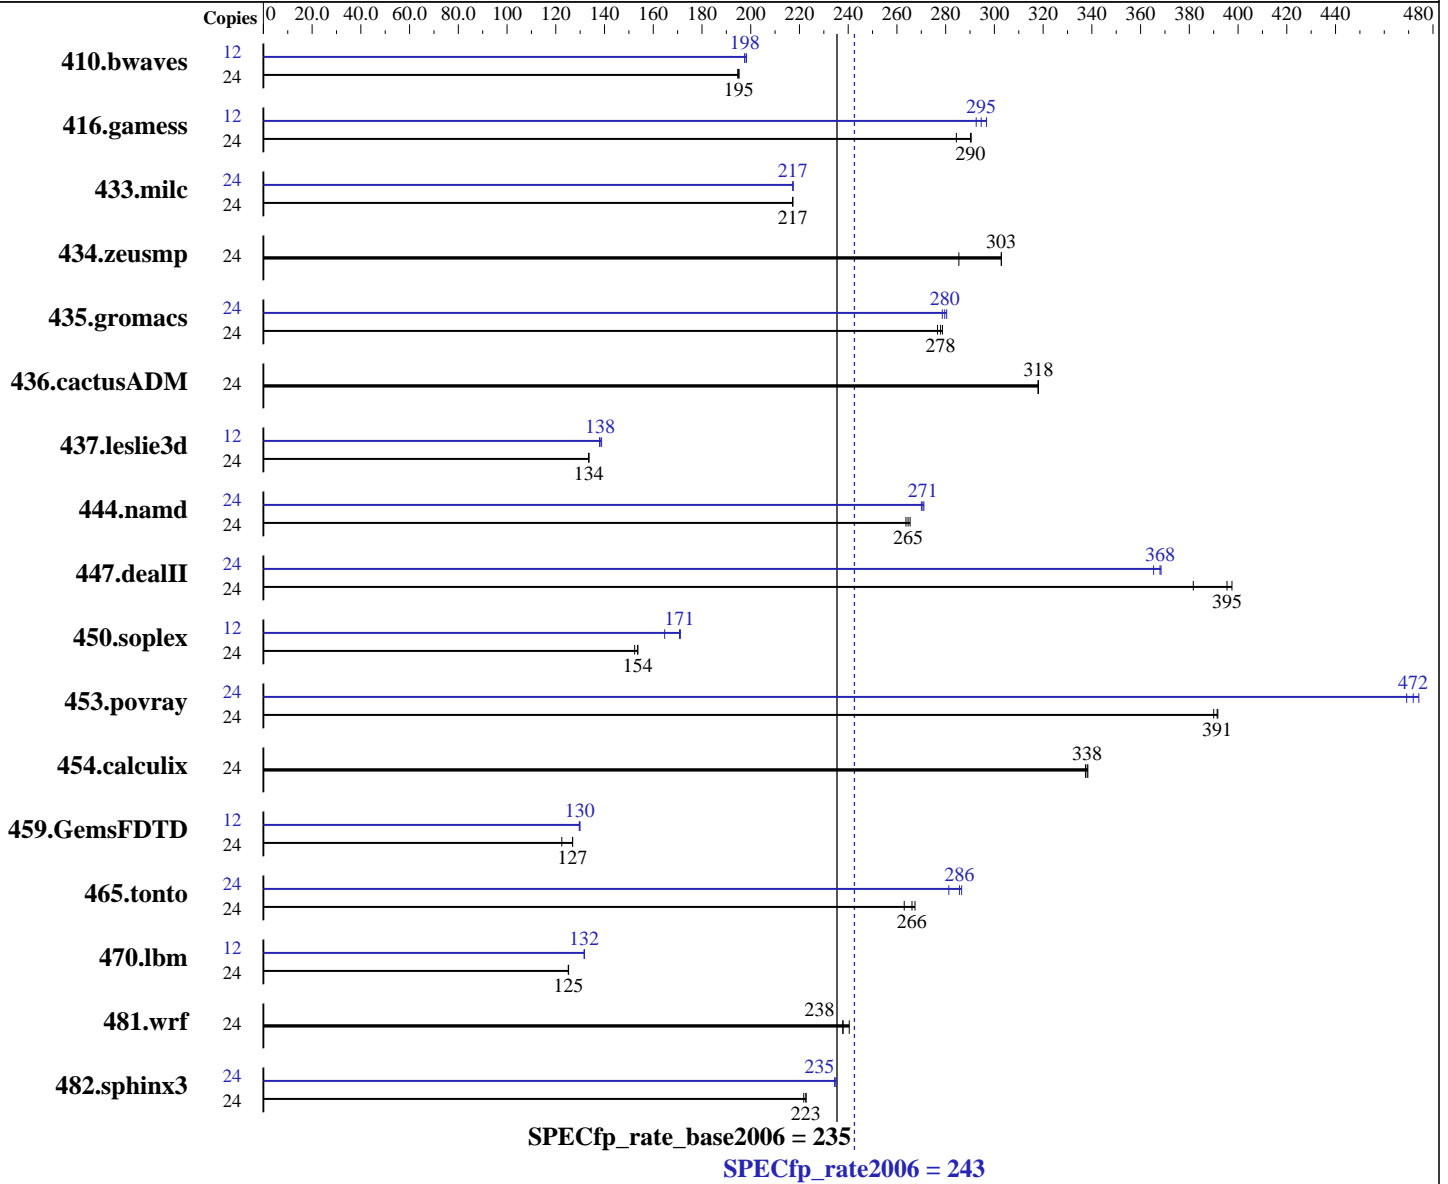

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
 Disk Subsystem: 1 x 300 GB SATA II, 10000 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|------------|-------------|------------|-------------|------------|--------|------------|------------|-------------|------------|-------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 24 | 1676 | 195 | 1671 | 195 | <u>1672</u> | <u>195</u> | 12 | <u>825</u> | <u>198</u> | 822 | 198 | 826 | 198 |
| 416.gamess | 24 | 1618 | 290 | 1652 | 284 | <u>1619</u> | <u>290</u> | 12 | <u>798</u> | <u>295</u> | 803 | 293 | 792 | 297 |
| 433.milc | 24 | <u>1014</u> | <u>217</u> | 1014 | 217 | 1014 | 217 | 24 | 1013 | 217 | <u>1014</u> | <u>217</u> | 1014 | 217 |
| 434.zeusmp | 24 | <u>721</u> | <u>303</u> | 721 | 303 | 765 | 285 | 24 | <u>721</u> | <u>303</u> | 721 | 303 | 765 | 285 |
| 435.gromacs | 24 | <u>617</u> | <u>278</u> | 619 | 277 | 615 | 279 | 24 | 611 | 280 | 615 | 279 | <u>613</u> | <u>280</u> |
| 436.cactusADM | 24 | <u>902</u> | <u>318</u> | 902 | 318 | 902 | 318 | 24 | <u>902</u> | <u>318</u> | 902 | 318 | 902 | 318 |
| 437.leslie3d | 24 | 1688 | 134 | 1690 | 133 | <u>1690</u> | <u>134</u> | 12 | <u>816</u> | <u>138</u> | 813 | 139 | 818 | 138 |
| 444.namd | 24 | <u>728</u> | <u>265</u> | 725 | 265 | 730 | 264 | 24 | 713 | 270 | <u>711</u> | <u>271</u> | 710 | 271 |
| 447.dealII | 24 | 719 | 382 | <u>694</u> | <u>395</u> | 691 | 397 | 24 | <u>746</u> | <u>368</u> | 752 | 365 | 745 | 368 |
| 450.soplex | 24 | 1314 | 152 | 1303 | 154 | <u>1303</u> | <u>154</u> | 12 | 608 | 165 | 585 | 171 | <u>586</u> | <u>171</u> |
| 453.povray | 24 | <u>326</u> | <u>391</u> | 326 | 392 | 327 | 390 | 24 | <u>271</u> | <u>472</u> | 272 | 469 | 269 | 474 |
| 454.calculix | 24 | <u>586</u> | <u>338</u> | 585 | 338 | 587 | 337 | 24 | <u>586</u> | <u>338</u> | 585 | 338 | 587 | 337 |
| 459.GemsFDTD | 24 | 2079 | 122 | 2006 | 127 | <u>2007</u> | <u>127</u> | 12 | 980 | 130 | 982 | 130 | <u>980</u> | <u>130</u> |
| 465.tonto | 24 | 898 | 263 | 883 | 267 | <u>887</u> | <u>266</u> | 24 | <u>827</u> | <u>286</u> | 840 | 281 | 824 | 287 |
| 470.lbm | 24 | 2632 | 125 | <u>2634</u> | <u>125</u> | 2635 | 125 | 12 | 1252 | 132 | <u>1252</u> | <u>132</u> | 1251 | 132 |
| 481.wrf | 24 | 1115 | 240 | 1127 | 238 | <u>1127</u> | <u>238</u> | 24 | 1115 | 240 | 1127 | 238 | <u>1127</u> | <u>238</u> |
| 482.sphinx3 | 24 | 2109 | 222 | <u>2101</u> | <u>223</u> | 2101 | 223 | 24 | 1991 | 235 | 1995 | 234 | <u>1994</u> | <u>235</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to full Speed (ie. Enterprise Blade mode) with Smart Blade Console through CMM (Chassis Management Module)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB460 F1, and Gateway GB460 F1 are electronically equivalent.
This result was measured on Gateway GB460 F1.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 243

Gateway GB460 F1 (Intel Xeon X5670, 2.93GHz)

SPECfp_rate_base2006 = 235

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:18:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.