



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint<sup>®</sup>\_rate2006 = 379

PowerEdge R815 (AMD Opteron 6172, 2.10 GHz)

SPECint\_rate\_base2006 = 331

CPU2006 license: 55


Test date: Sep-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

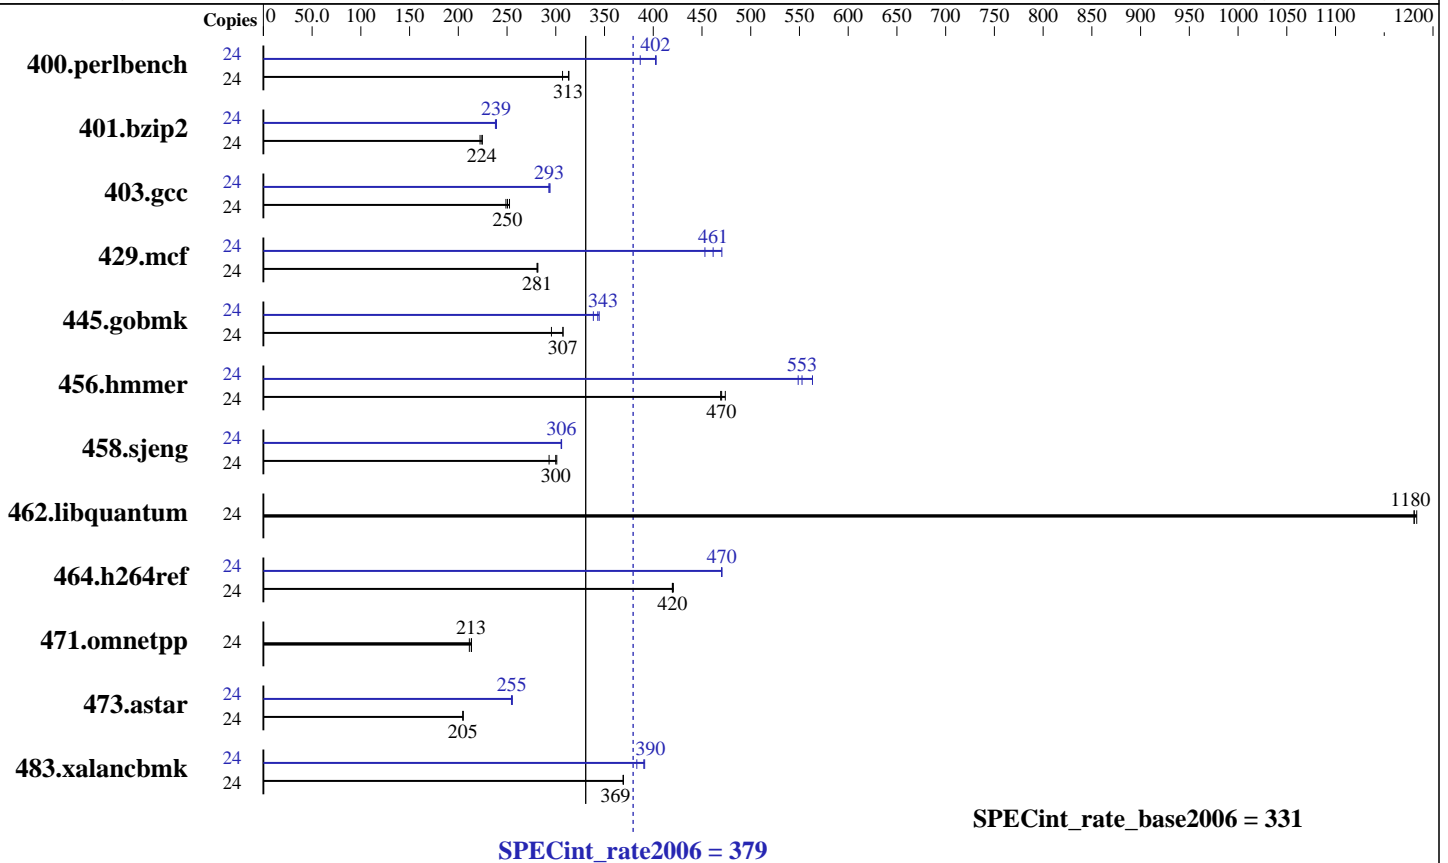

SPECint\_rate\_base2006 = 331

## Hardware

CPU Name: AMD Opteron 6172  
 CPU Characteristics:  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)  
 Disk Subsystem: 1 x 146 GB SAS 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 379

PowerEdge R815 (AMD Opteron 6172, 2.10 GHz)

SPECint\_rate\_base2006 = 331

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2010  
Hardware Availability: Aug-2010  
Software Availability: Jul-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>749</b>	<b>313</b>	764	307	748	314	24	606	387	582	403	<b>583</b>	<b>402</b>
401.bzip2	24	<b>1033</b>	<b>224</b>	1031	225	1042	222	24	973	238	969	239	<b>970</b>	<b>239</b>
403.gcc	24	<b>771</b>	<b>250</b>	765	253	776	249	24	657	294	<b>659</b>	<b>293</b>	659	293
429.mcf	24	779	281	777	282	<b>779</b>	<b>281</b>	24	483	453	465	470	<b>474</b>	<b>461</b>
445.gobmk	24	<b>819</b>	<b>307</b>	819	307	852	296	24	<b>734</b>	<b>343</b>	744	339	731	345
456.hammer	24	<b>476</b>	<b>470</b>	477	469	472	474	24	408	549	<b>405</b>	<b>553</b>	397	563
458.sjeng	24	991	293	<b>968</b>	<b>300</b>	965	301	24	949	306	<b>950</b>	<b>306</b>	950	306
462.libquantum	24	<b>421</b>	<b>1180</b>	421	1180	420	1180	24	<b>421</b>	<b>1180</b>	421	1180	420	1180
464.h264ref	24	<b>1265</b>	<b>420</b>	1266	420	1263	421	24	<b>1129</b>	<b>470</b>	1129	470	1130	470
471.omnetpp	24	702	214	<b>703</b>	<b>213</b>	710	211	24	702	214	<b>703</b>	<b>213</b>	710	211
473.astar	24	822	205	823	205	<b>823</b>	<b>205</b>	24	660	255	662	255	<b>661</b>	<b>255</b>
483.xalancbmk	24	448	369	<b>449</b>	<b>369</b>	449	369	24	432	383	<b>424</b>	<b>390</b>	423	391

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 379

PowerEdge R815 (AMD Opteron 6172, 2.10 GHz)

SPECint\_rate\_base2006 = 331

CPU2006 license: 55

Test date: Sep-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

```

C++ benchmarks:

```

-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

```

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 379

PowerEdge R815 (AMD Opteron 6172, 2.10 GHz)

SPECint\_rate\_base2006 = 331

CPU2006 license: 55

Test date: Sep-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
 -LNO:ignore\_feedback=off -CG:p2align=on  
 -CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:local\_sched\_alg=1 -CG:cflow=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 379

PowerEdge R815 (AMD Opteron 6172, 2.10 GHz)

SPECint\_rate\_base2006 = 331

CPU2006 license: 55

Test date: Sep-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
 -WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
 -OPT:alias=disjoint -INLINE:aggressive=on  
 -IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
 -CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
 -fno-emit-exceptions  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:02:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 September 2010.