



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp®\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Oct-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

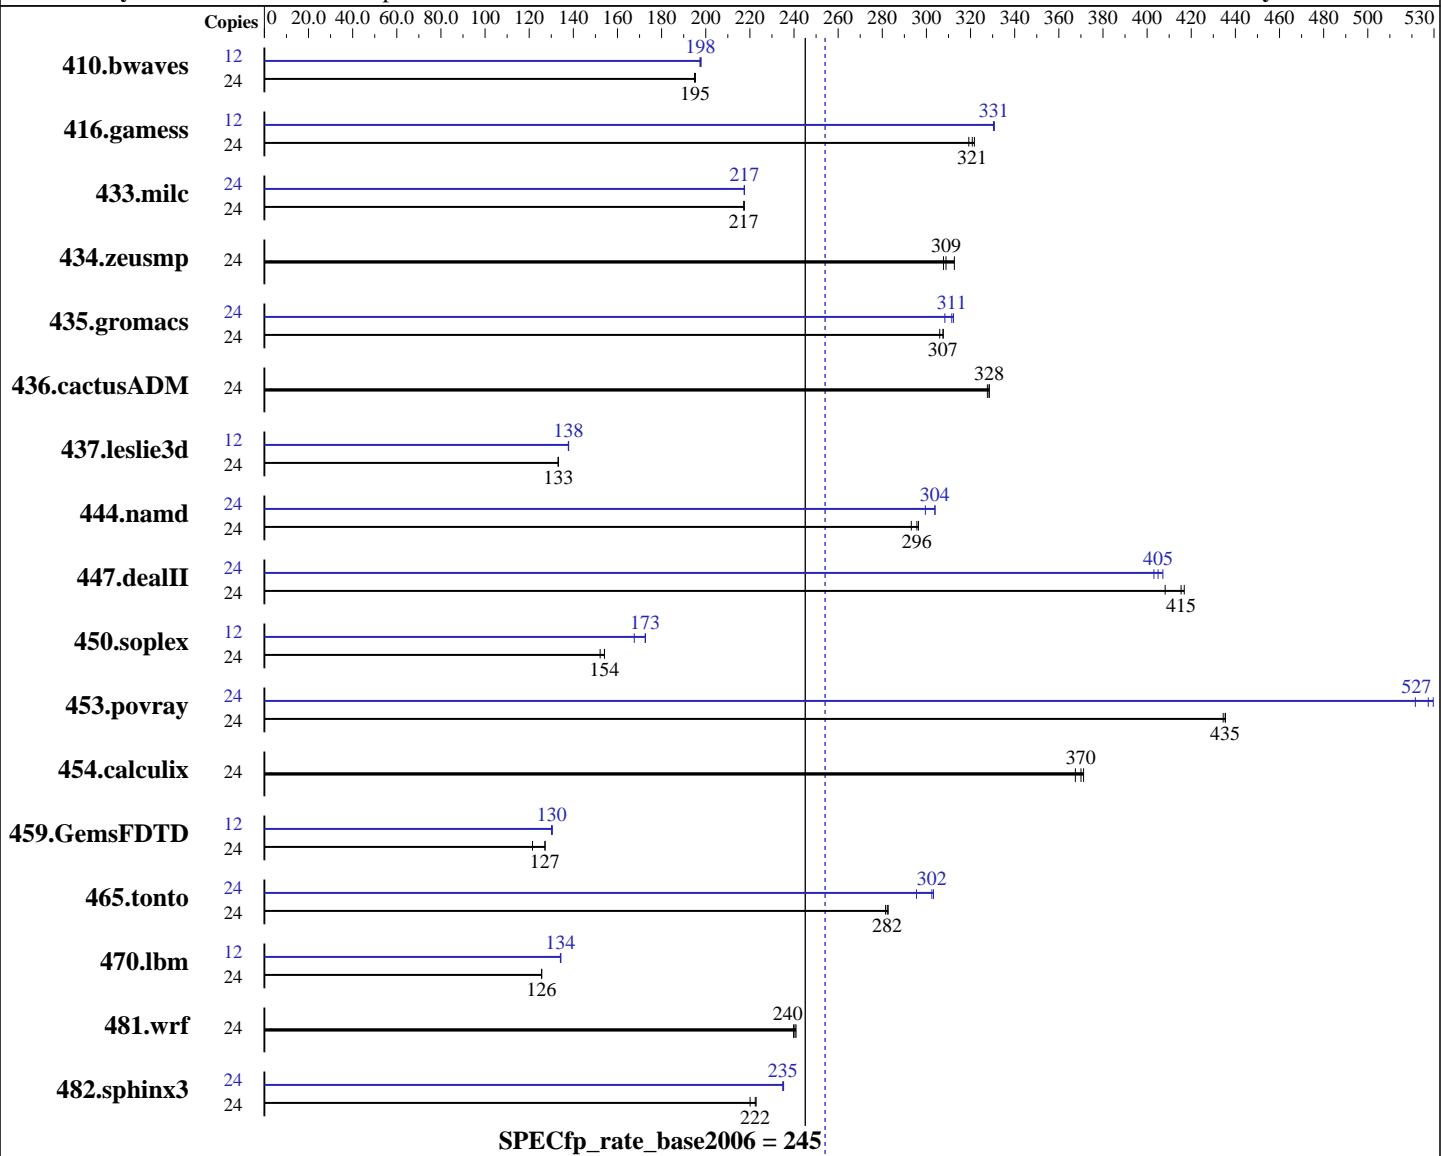

### Hardware

CPU Name: Intel Xeon X5680  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATAII, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1670	195	<b>1671</b>	<b>195</b>	1674	195	12	826	197	824	198	<b>825</b>	<b>198</b>		
416.gamess	24	1461	322	1472	319	<b>1465</b>	<b>321</b>	12	711	330	<b>711</b>	<b>331</b>	710	331		
433.milc	24	1013	217	<b>1014</b>	<b>217</b>	1014	217	24	1013	217	<b>1013</b>	<b>217</b>	1013	218		
434.zeusmp	24	<b>707</b>	<b>309</b>	699	313	710	308	24	<b>707</b>	<b>309</b>	699	313	710	308		
435.gromacs	24	560	306	<b>557</b>	<b>307</b>	557	308	24	556	308	549	312	<b>550</b>	<b>311</b>		
436.cactusADM	24	<b>873</b>	<b>328</b>	875	328	873	328	24	<b>873</b>	<b>328</b>	875	328	873	328		
437.leslie3d	24	1693	133	<b>1694</b>	<b>133</b>	1695	133	12	818	138	819	138	<b>818</b>	<b>138</b>		
444.namd	24	657	293	649	296	<b>651</b>	<b>296</b>	24	643	300	<b>634</b>	<b>304</b>	633	304		
447.dealII	24	<b>661</b>	<b>415</b>	673	408	659	417	24	674	407	681	403	<b>678</b>	<b>405</b>		
450.soplex	24	1316	152	1299	154	<b>1299</b>	<b>154</b>	12	597	168	<b>580</b>	<b>173</b>	580	173		
453.povray	24	294	434	<b>293</b>	<b>435</b>	293	436	24	<b>242</b>	<b>527</b>	241	530	245	522		
454.calculix	24	539	367	533	371	<b>535</b>	<b>370</b>	24	539	367	533	371	<b>535</b>	<b>370</b>		
459.GemsFDTD	24	2096	122	2001	127	<b>2003</b>	<b>127</b>	12	976	130	979	130	<b>977</b>	<b>130</b>		
465.tonto	24	835	283	839	281	<b>837</b>	<b>282</b>	24	799	296	<b>781</b>	<b>302</b>	779	303		
470.lbm	24	<b>2625</b>	<b>126</b>	2624	126	2626	126	12	1227	134	<b>1228</b>	<b>134</b>	1229	134		
481.wrf	24	1113	241	<b>1115</b>	<b>240</b>	1118	240	24	1113	241	<b>1115</b>	<b>240</b>	1118	240		
482.sphinx3	24	<b>2103</b>	<b>222</b>	2125	220	2099	223	24	1988	235	1991	235	<b>1991</b>	<b>235</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Component Notes

Tested system case compliance with Intel EEB 3.61 spec  
SSI Server Power Supply 650W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

**CPU2006 license:** 9016

**Test sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test date:** Oct-2010

**Hardware Availability:** Oct-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xsse4 .2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4 .2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 254**

**SPECfp\_rate\_base2006 = 245**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:00:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 November 2010.