



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55


Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

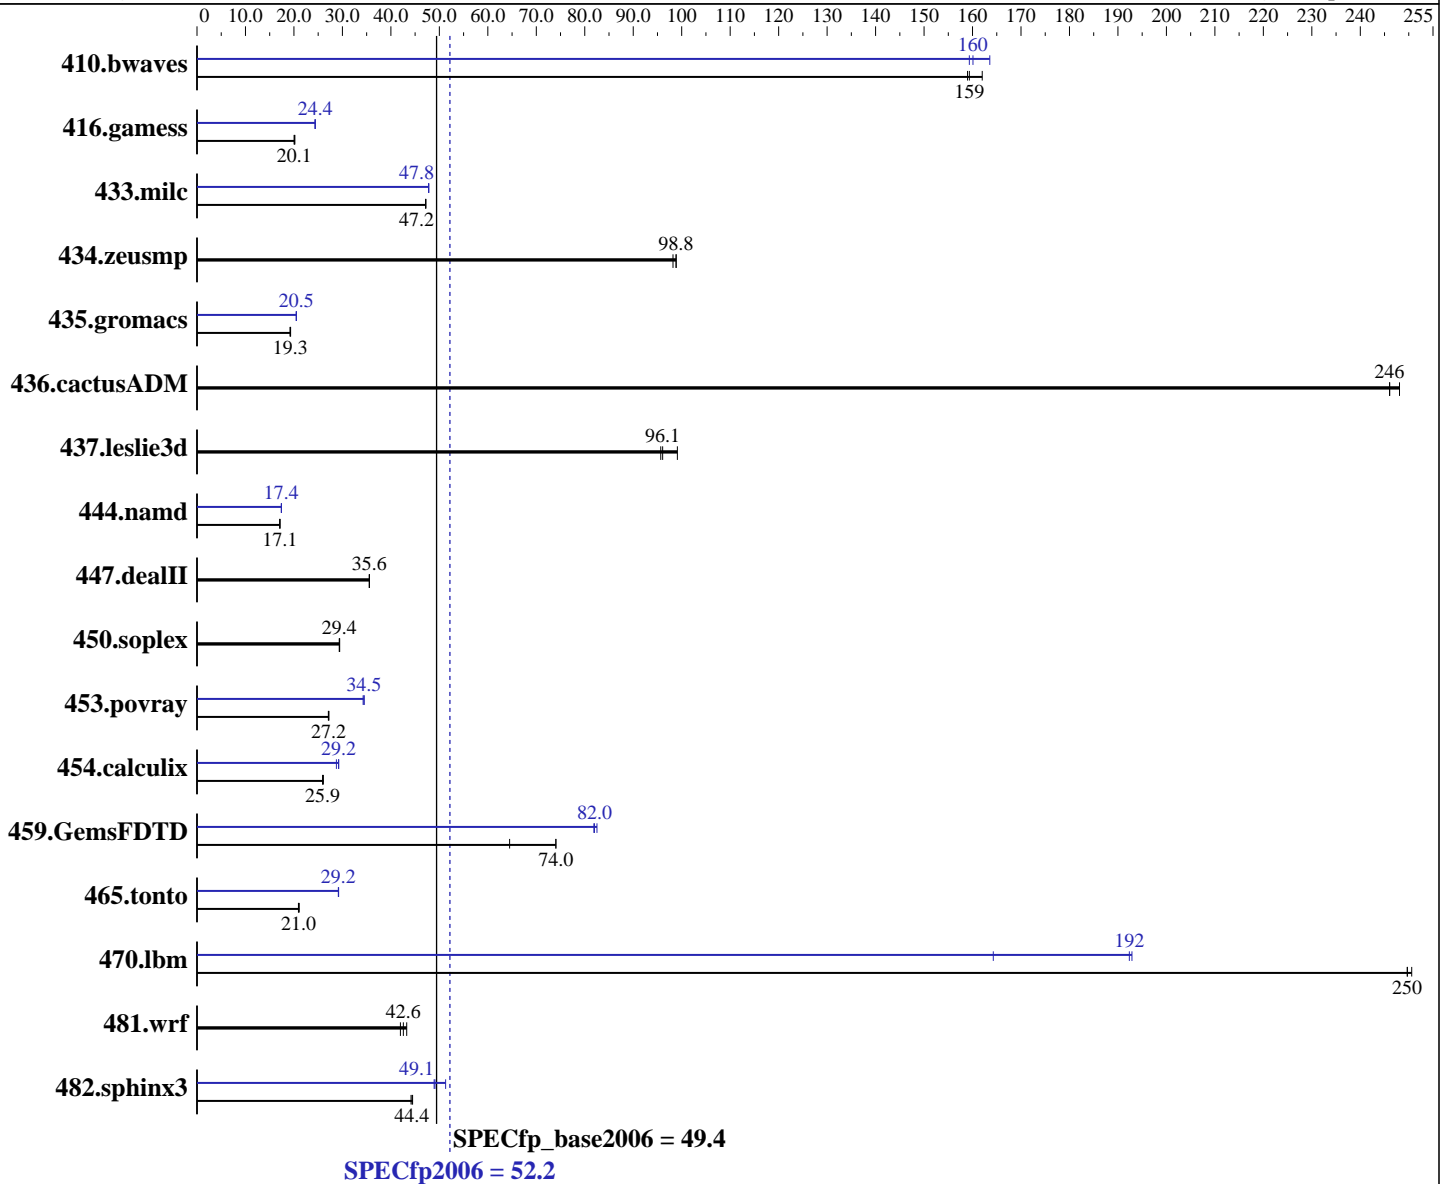

Hardware

CPU Name: Intel Xeon E5649
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64),
 Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE
 for applications running on Intel 64
 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.3	159	83.9	162	85.5	159	83.1	164	84.9	160	85.3	159
416.gamess	970	20.2	974	20.1	977	20.0	803	24.4	803	24.4	803	24.4
433.milc	195	47.2	195	47.2	195	47.2	192	47.8	192	47.8	192	47.8
434.zeusmp	92.7	98.2	92.1	98.8	92.1	98.8	92.7	98.2	92.1	98.8	92.1	98.8
435.gromacs	371	19.3	372	19.2	370	19.3	348	20.5	348	20.5	349	20.5
436.cactusADM	48.2	248	48.6	246	48.6	246	48.2	248	48.6	246	48.6	246
437.leslie3d	94.8	99.1	97.8	96.1	98.2	95.7	94.8	99.1	97.8	96.1	98.2	95.7
444.namd	469	17.1	469	17.1	469	17.1	461	17.4	461	17.4	460	17.4
447.dealII	322	35.6	322	35.6	322	35.6	322	35.6	322	35.6	322	35.6
450.soplex	284	29.4	283	29.4	284	29.3	284	29.4	283	29.4	284	29.3
453.povray	196	27.2	196	27.1	196	27.2	154	34.5	155	34.3	154	34.5
454.calculix	318	25.9	316	26.1	318	25.9	282	29.2	282	29.2	287	28.8
459.GemsFDTD	165	64.5	143	74.0	143	74.0	129	82.5	130	81.9	129	82.0
465.tonto	469	21.0	470	20.9	467	21.1	337	29.2	337	29.2	337	29.2
470.lbm	54.8	251	55.0	250	55.0	250	71.4	192	71.2	193	83.6	164
481.wrf	262	42.6	258	43.3	266	42.0	262	42.6	258	43.3	266	42.0
482.sphinx3	439	44.4	438	44.5	441	44.2	380	51.3	398	48.9	397	49.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)
Logical Processor = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 52.2

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECfp_base2006 = 49.4

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:53:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 March 2011.