



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECfp®\_rate2006 = 403

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

### SPECfp\_rate\_base2006 = 372

CPU2006 license: 9016


Test date: Oct-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jul-2011

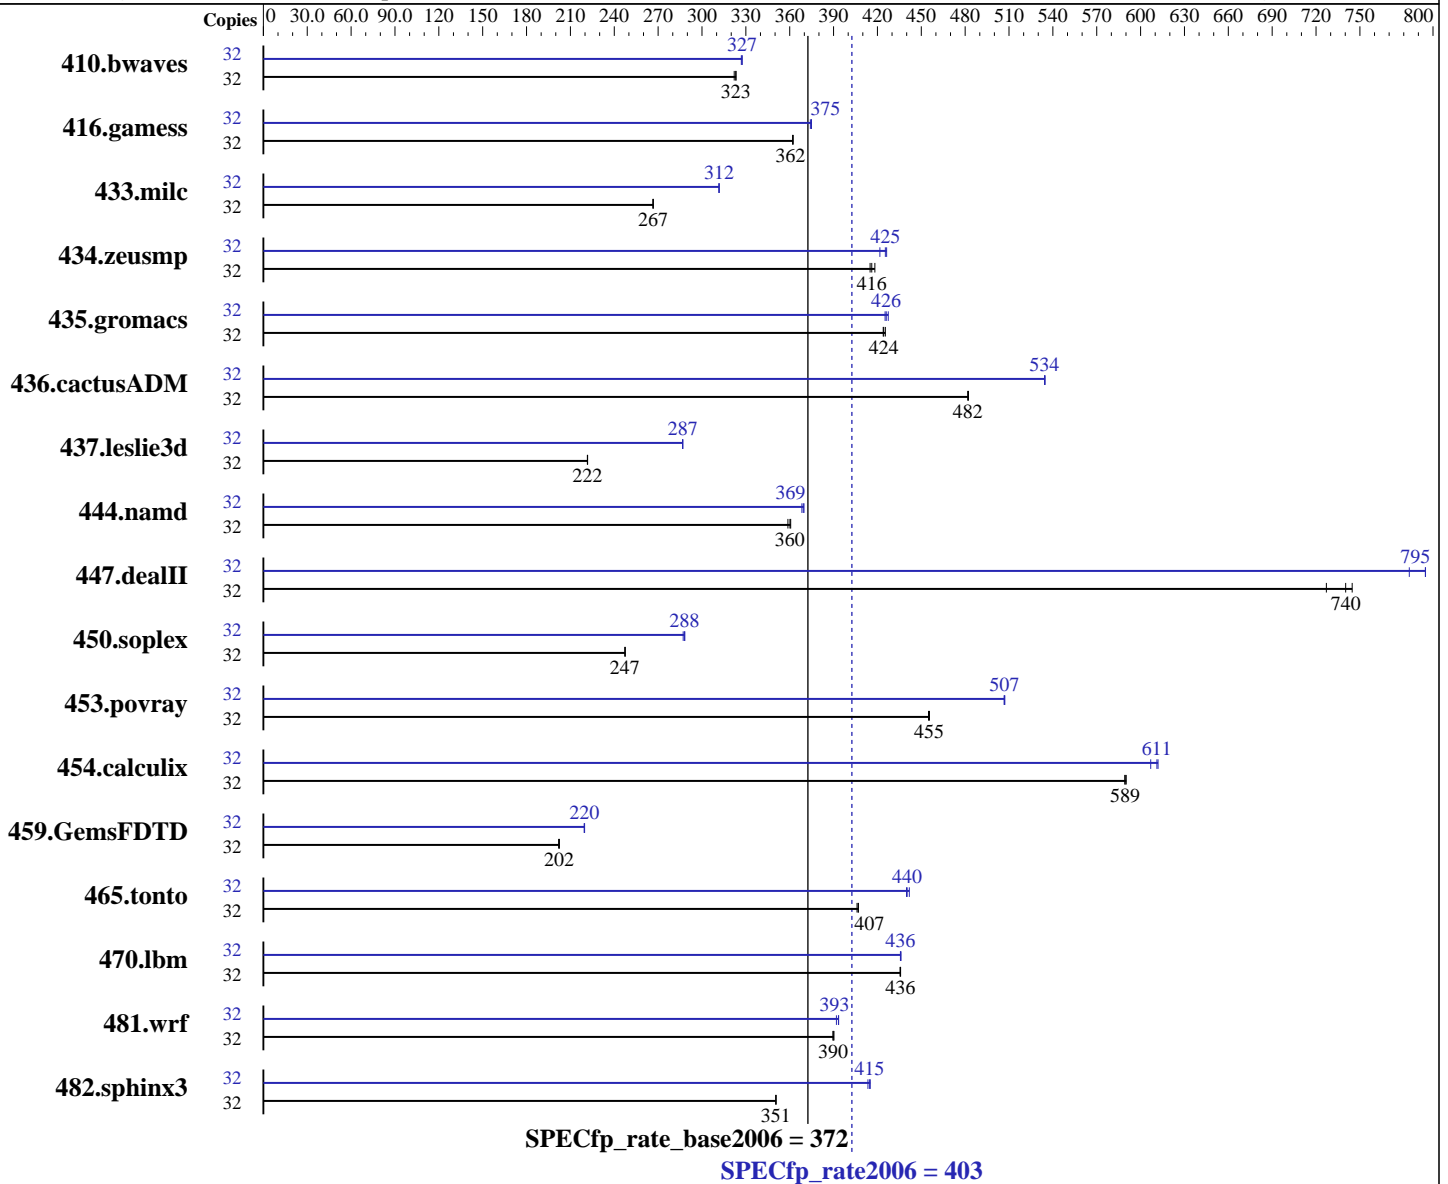

### Hardware

CPU Name: AMD Opteron 6282 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp\_rate2006 = 403

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

SPECfp\_rate\_base2006 = 372

CPU2006 license: 9016

Test date: Oct-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1350	322	<u>1346</u>	<u>323</u>	1345	323	32	<u>1328</u>	<u>327</u>	1330	327	1328	327
416.gamess	32	<u>1730</u>	<u>362</u>	1731	362	1729	362	32	1671	375	1675	374	<u>1672</u>	<u>375</u>
433.milc	32	1102	266	<u>1102</u>	<u>267</u>	1102	267	32	<u>943</u>	<u>312</u>	943	312	942	312
434.zeusmp	32	702	415	696	418	<u>700</u>	<u>416</u>	32	683	426	<u>684</u>	<u>425</u>	691	422
435.gromacs	32	539	424	<u>538</u>	<u>424</u>	537	425	32	<u>536</u>	<u>426</u>	537	425	535	427
436.cactusADM	32	793	482	794	482	<u>793</u>	<u>482</u>	32	<u>716</u>	<u>534</u>	715	535	716	534
437.leslie3d	32	<u>1357</u>	<u>222</u>	1356	222	1357	222	32	<u>1049</u>	<u>287</u>	1049	287	1049	287
444.namd	32	712	361	715	359	<u>713</u>	<u>360</u>	32	697	368	<u>695</u>	<u>369</u>	694	370
447.dealII	32	<u>495</u>	<u>740</u>	492	745	504	727	32	461	795	<u>461</u>	<u>795</u>	467	784
450.soplex	32	1079	247	1078	247	<u>1079</u>	<u>247</u>	32	929	287	926	288	<u>926</u>	<u>288</u>
453.povray	32	374	455	<u>374</u>	<u>455</u>	374	456	32	336	507	336	507	<u>336</u>	<u>507</u>
454.calculix	32	448	589	<u>448</u>	<u>589</u>	447	590	32	<u>432</u>	<u>611</u>	435	607	431	612
459.GemsFDTD	32	<u>1678</u>	<u>202</u>	1677	202	1681	202	32	<u>1546</u>	<u>220</u>	1545	220	1547	219
465.tonto	32	775	406	<u>774</u>	<u>407</u>	774	407	32	716	440	713	442	<u>715</u>	<u>440</u>
470.lbm	32	1010	435	<u>1009</u>	<u>436</u>	1009	436	32	1008	436	1009	436	<u>1009</u>	<u>436</u>
481.wrf	32	916	390	917	390	<u>917</u>	<u>390</u>	32	<u>909</u>	<u>393</u>	908	393	912	392
482.sphinx3	32	<u>1779</u>	<u>351</u>	1779	351	1779	351	32	<u>1504</u>	<u>415</u>	1508	414	1503	415

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 403**

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

**SPECfp\_rate\_base2006 = 372**

**CPU2006 license:** 9016

**Test date:** Oct-2011

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Nov-2011

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2011

## Operating System Notes (Continued)

Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

SSI Server Power Supply 600W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 403**

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

**SPECfp\_rate\_base2006 = 372**

**CPU2006 license:** 9016

**Test date:** Oct-2011

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Nov-2011

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2011

## Base Portability Flags (Continued)

```

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

### C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

### Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

### Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 403**

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

**SPECfp\_rate\_base2006 = 372**

**CPU2006 license:** 9016

**Test date:** Oct-2011

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Nov-2011

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2011

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

### C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 403**

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

**SPECfp\_rate\_base2006 = 372**

**CPU2006 license:** 9016

**Test date:** Oct-2011

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Nov-2011

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -m32  
-HP:bd=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bd=2m:heap=2m

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 403**

ASUS KGPE-D16 server motherboard  
(2.6 GHz AMD Opteron 6282 SE)

**SPECfp\_rate\_base2006 = 372**

**CPU2006 license:** 9016

**Test date:** Oct-2011

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Nov-2011

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>  
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>  
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 00:54:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 November 2011.