



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 129

Intel DH61WW motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 122

CPU2006 license: 13


Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

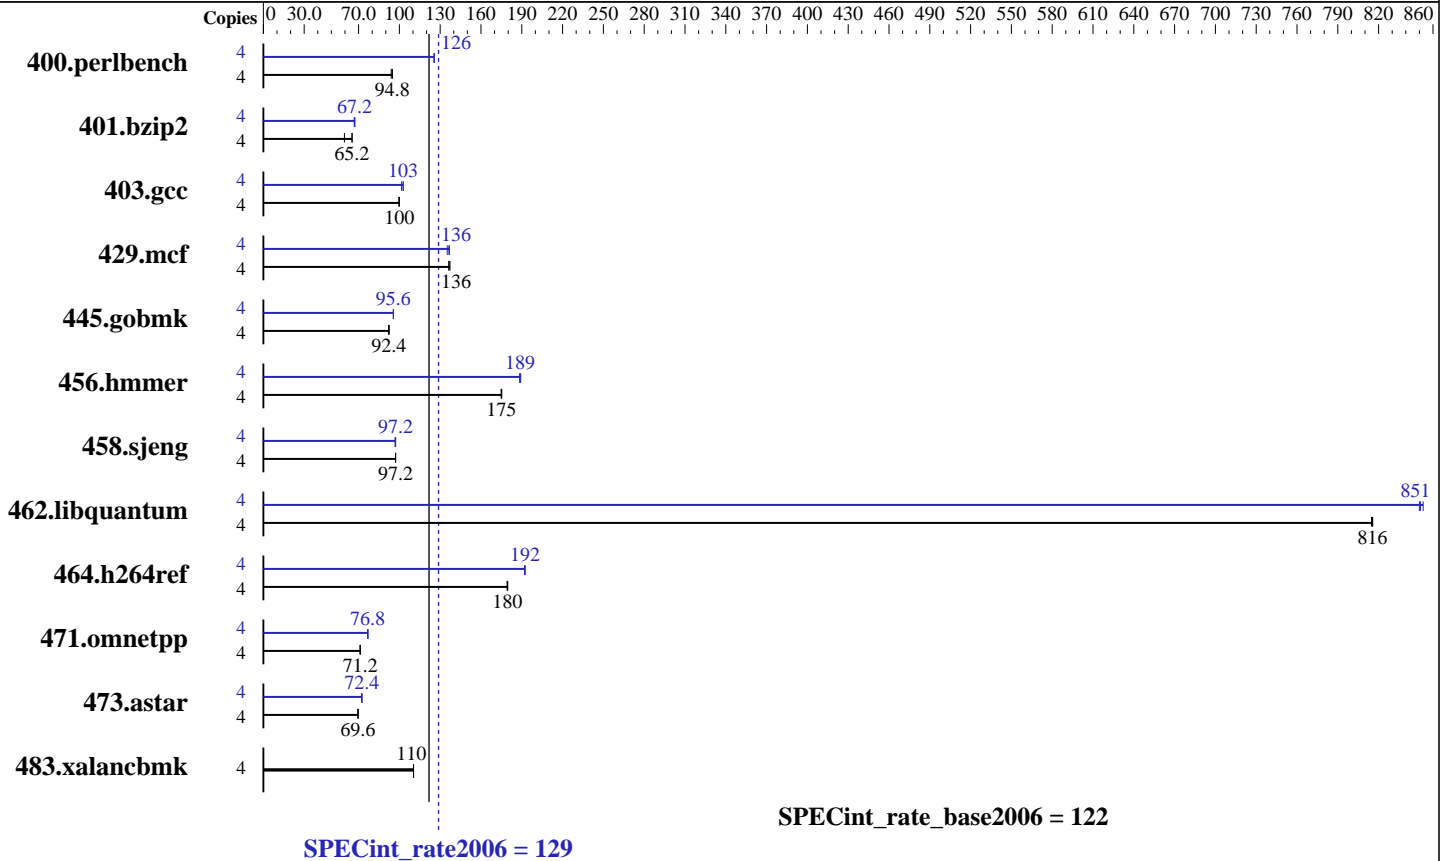

Hardware

CPU Name: Intel Core i5-2400
 CPU Characteristics: Intel Turbo Boost Technology up to 3.4 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 250GB HDD, 7200 rpm
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate SP1 (64-bit)
 Compiler: C/C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 129

Intel DH61WW motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 122

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	416	94.0	<u>412</u>	<u>94.8</u>	412	94.8	4	311	126	311	126	<u>311</u>	<u>126</u>
401.bzip2	4	650	59.6	591	65.2	<u>591</u>	<u>65.2</u>	4	577	66.8	574	67.2	<u>576</u>	<u>67.2</u>
403.gcc	4	323	99.6	322	100	<u>323</u>	<u>100</u>	4	<u>314</u>	<u>103</u>	317	102	313	103
429.mcf	4	<u>267</u>	<u>136</u>	266	137	267	136	4	267	137	<u>268</u>	<u>136</u>	270	135
445.gobmk	4	<u>455</u>	<u>92.4</u>	455	92.0	455	92.4	4	440	95.6	439	95.6	<u>439</u>	<u>95.6</u>
456.hammer	4	213	175	213	175	<u>213</u>	<u>175</u>	4	198	188	197	189	<u>198</u>	<u>189</u>
458.sjeng	4	498	97.2	<u>498</u>	<u>97.2</u>	498	97.2	4	499	97.2	499	96.8	<u>499</u>	<u>97.2</u>
462.libquantum	4	102	815	102	816	<u>102</u>	<u>816</u>	4	97.5	850	97.2	853	<u>97.4</u>	<u>851</u>
464.h264ref	4	493	180	494	179	<u>493</u>	<u>180</u>	4	461	192	460	192	<u>461</u>	<u>192</u>
471.omnetpp	4	<u>350</u>	<u>71.2</u>	350	71.2	351	71.2	4	326	76.8	<u>326</u>	<u>76.8</u>	326	76.8
473.astar	4	403	69.6	404	69.6	<u>403</u>	<u>69.6</u>	4	<u>388</u>	<u>72.4</u>	388	72.4	388	72.4
483.xalancbmk	4	<u>250</u>	<u>110</u>	250	110	250	110	4	<u>250</u>	<u>110</u>	250	110	250	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 129

Intel DH61WW motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 122

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmer: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32

456.hmmer: -DSPEC_CPU_P64

458.sjeng: -DSPEC_CPU_P64

462.libquantum: -DSPEC_CPU_P64

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

473.astar: -DSPEC_CPU_P64

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 129

Intel DH61WW motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 122

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000
shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 129

Intel DH61WW motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 122

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:20:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 December 2011.