



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint[®]_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

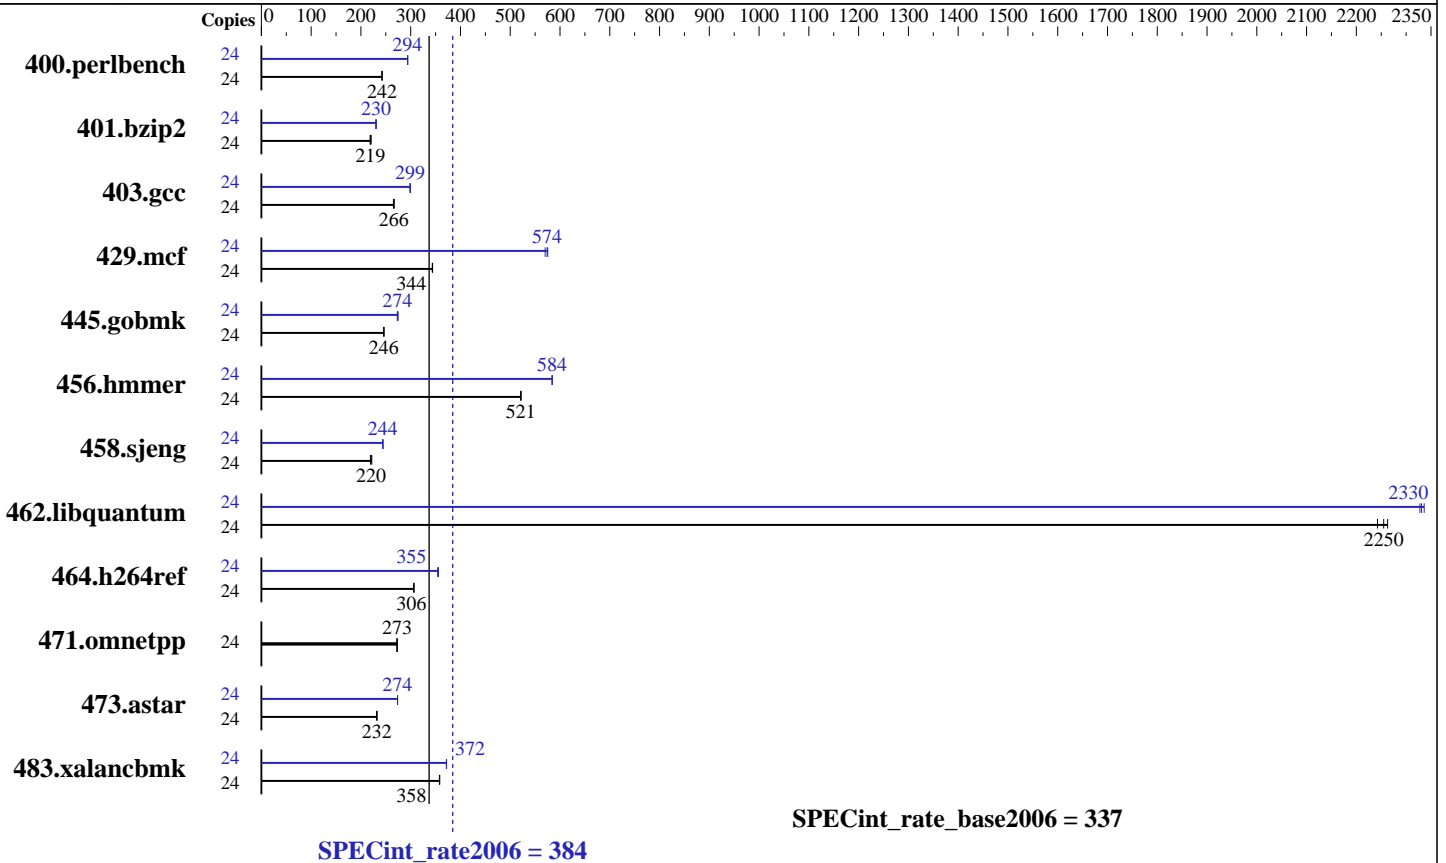

Hardware

CPU Name: AMD Opteron 6234
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 384 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-09, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
 Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	967	242	967	242	967	242	24	798	294	798	294	798	294
401.bzip2	24	1058	219	1050	221	1059	219	24	1007	230	1004	231	1005	230
403.gcc	24	724	267	726	266	728	265	24	646	299	645	299	647	299
429.mcf	24	638	343	636	344	636	344	24	384	570	380	575	381	574
445.gobmk	24	1024	246	1024	246	1022	246	24	922	273	920	274	917	275
456.hammer	24	430	521	429	521	429	521	24	383	584	383	584	383	584
458.sjeng	24	1309	222	1317	220	1325	219	24	1190	244	1190	244	1189	244
462.libquantum	24	221	2250	220	2260	222	2240	24	213	2340	214	2330	213	2330
464.h264ref	24	1734	306	1734	306	1733	306	24	1500	354	1495	355	1494	356
471.omnetpp	24	550	273	550	272	550	273	24	550	273	550	272	550	273
473.astar	24	726	232	726	232	726	232	24	616	274	616	274	616	274
483.xalancbm	24	462	358	463	358	463	358	24	445	372	445	372	446	372

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revB/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off
 -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6234

SPECint_rate2006 = 384

SPECint_rate_base2006 = 337

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:23:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 January 2012.