



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

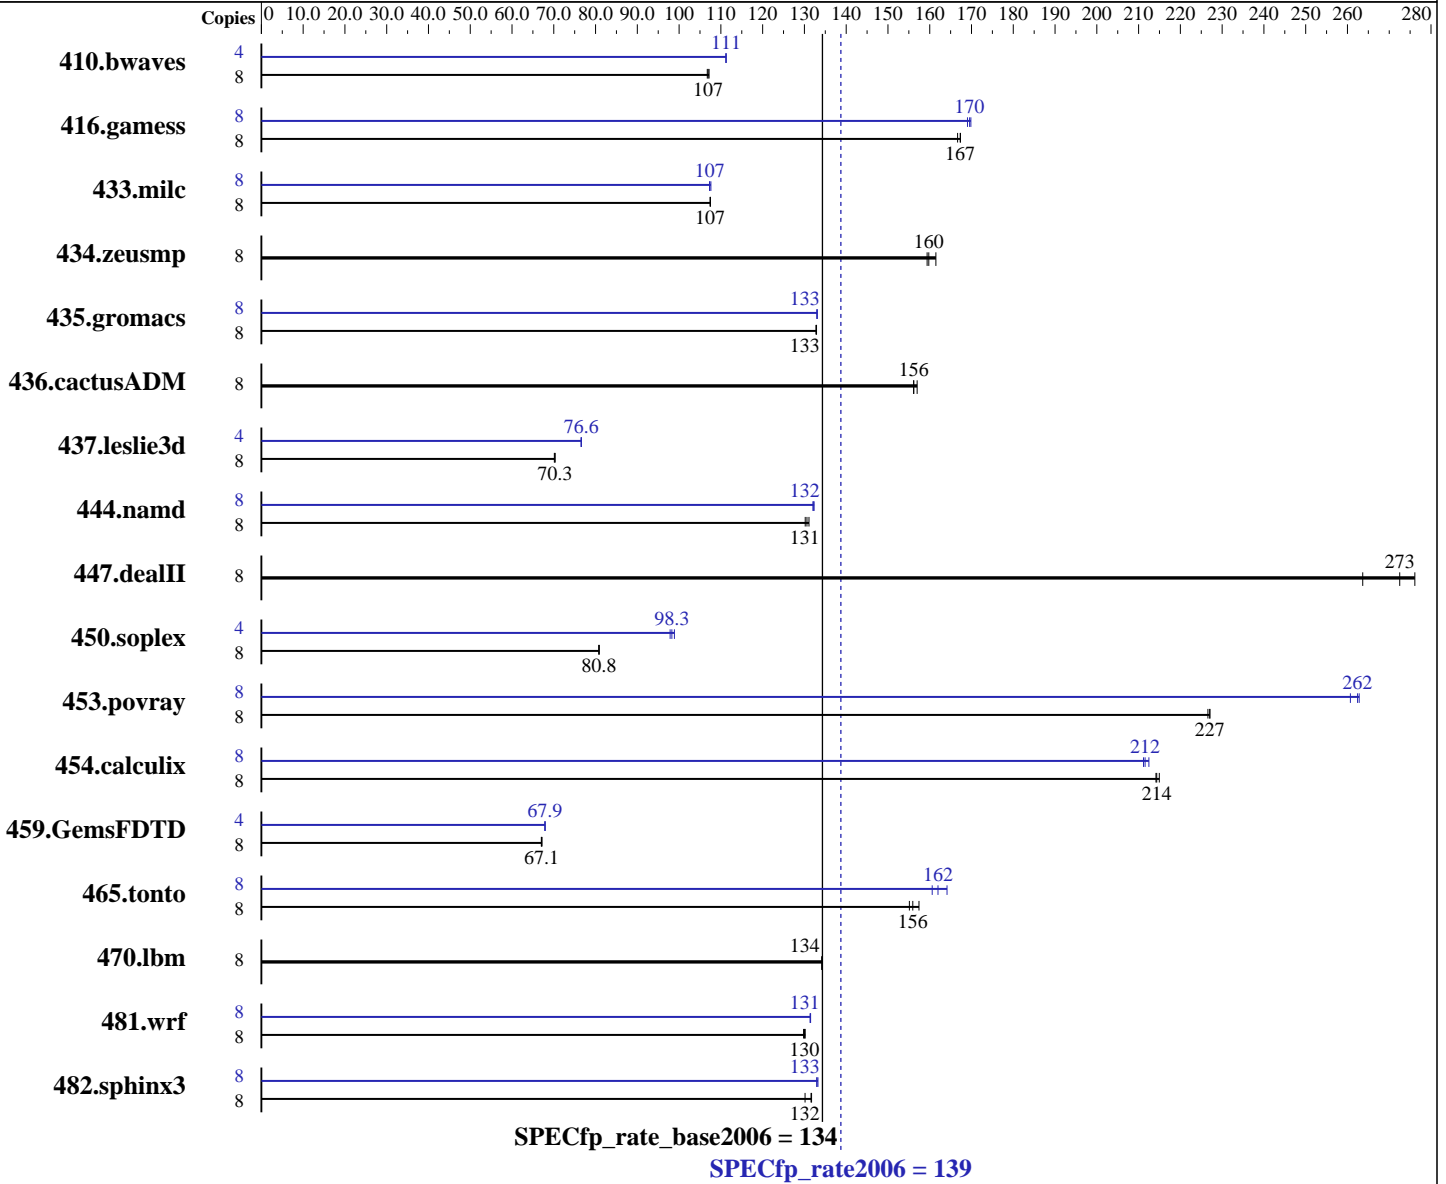

Hardware

CPU Name: Intel Xeon E3-1270 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1019	107	<u>1016</u>	<u>107</u>	1014	107	4	489	111	489	111	<u>489</u>	<u>111</u>
416.gamess	8	<u>936</u>	<u>167</u>	940	167	936	167	8	922	170	<u>924</u>	<u>170</u>	927	169
433.milc	8	683	107	<u>683</u>	<u>107</u>	684	107	8	682	108	685	107	<u>684</u>	<u>107</u>
434.zeusmp	8	<u>456</u>	<u>160</u>	451	161	457	159	8	<u>456</u>	<u>160</u>	451	161	457	159
435.gromacs	8	430	133	430	133	<u>430</u>	<u>133</u>	8	429	133	430	133	<u>429</u>	<u>133</u>
436.cactusADM	8	609	157	612	156	<u>612</u>	<u>156</u>	8	609	157	612	156	<u>612</u>	<u>156</u>
437.leslie3d	8	1072	70.1	<u>1070</u>	<u>70.3</u>	1070	70.3	4	491	76.5	491	76.6	<u>491</u>	<u>76.6</u>
444.namd	8	<u>491</u>	<u>131</u>	493	130	489	131	8	486	132	<u>486</u>	<u>132</u>	485	132
447.dealII	8	347	264	<u>336</u>	<u>273</u>	331	276	8	347	264	<u>336</u>	<u>273</u>	331	276
450.soplex	8	825	80.9	<u>825</u>	<u>80.8</u>	826	80.8	4	337	98.9	341	97.9	<u>339</u>	<u>98.3</u>
453.povray	8	<u>187</u>	<u>227</u>	187	227	188	227	8	162	263	<u>162</u>	<u>262</u>	163	261
454.calculix	8	308	214	307	215	<u>308</u>	<u>214</u>	8	<u>312</u>	<u>212</u>	311	212	313	211
459.GemsFDTD	8	1266	67.0	<u>1266</u>	<u>67.1</u>	1263	67.2	4	625	67.9	625	67.9	<u>625</u>	<u>67.9</u>
465.tonto	8	<u>505</u>	<u>156</u>	507	155	500	157	8	<u>486</u>	<u>162</u>	490	161	480	164
470.lbm	8	819	134	819	134	<u>819</u>	<u>134</u>	8	819	134	819	134	<u>819</u>	<u>134</u>
481.wrf	8	688	130	686	130	<u>687</u>	<u>130</u>	8	680	131	<u>680</u>	<u>131</u>	680	131
482.sphinx3	8	1198	130	1184	132	<u>1185</u>	<u>132</u>	8	<u>1172</u>	<u>133</u>	1173	133	1170	133

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Turbo Mode enabled in BIOS
C-State enabled in BIOS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

Sysinfo program /root/SPECcpul.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Fri Jun 22 01:19:36 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1270 V2 @ 3.50GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB

From /proc/meminfo
MemTotal: 16322724 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 21 15:45

SPEC is set to: /root/SPECcpul.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
ext4 50G 22G 25G 47% /

Additional information from dmidecode:
Memory:
2x Micron 18JSF1G72AZ-1G6D1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/SPECcpul.2/libs/32:/root/SPECcpul.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 139

IBM System x3250 M4 (Intel Xeon E3-1270 v2)

SPECfp_rate_base2006 = 134

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:15:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 July 2012.