



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

SPECfp<sup>®</sup>\_rate2006 = 306

SPECfp\_rate\_base2006 = 298

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

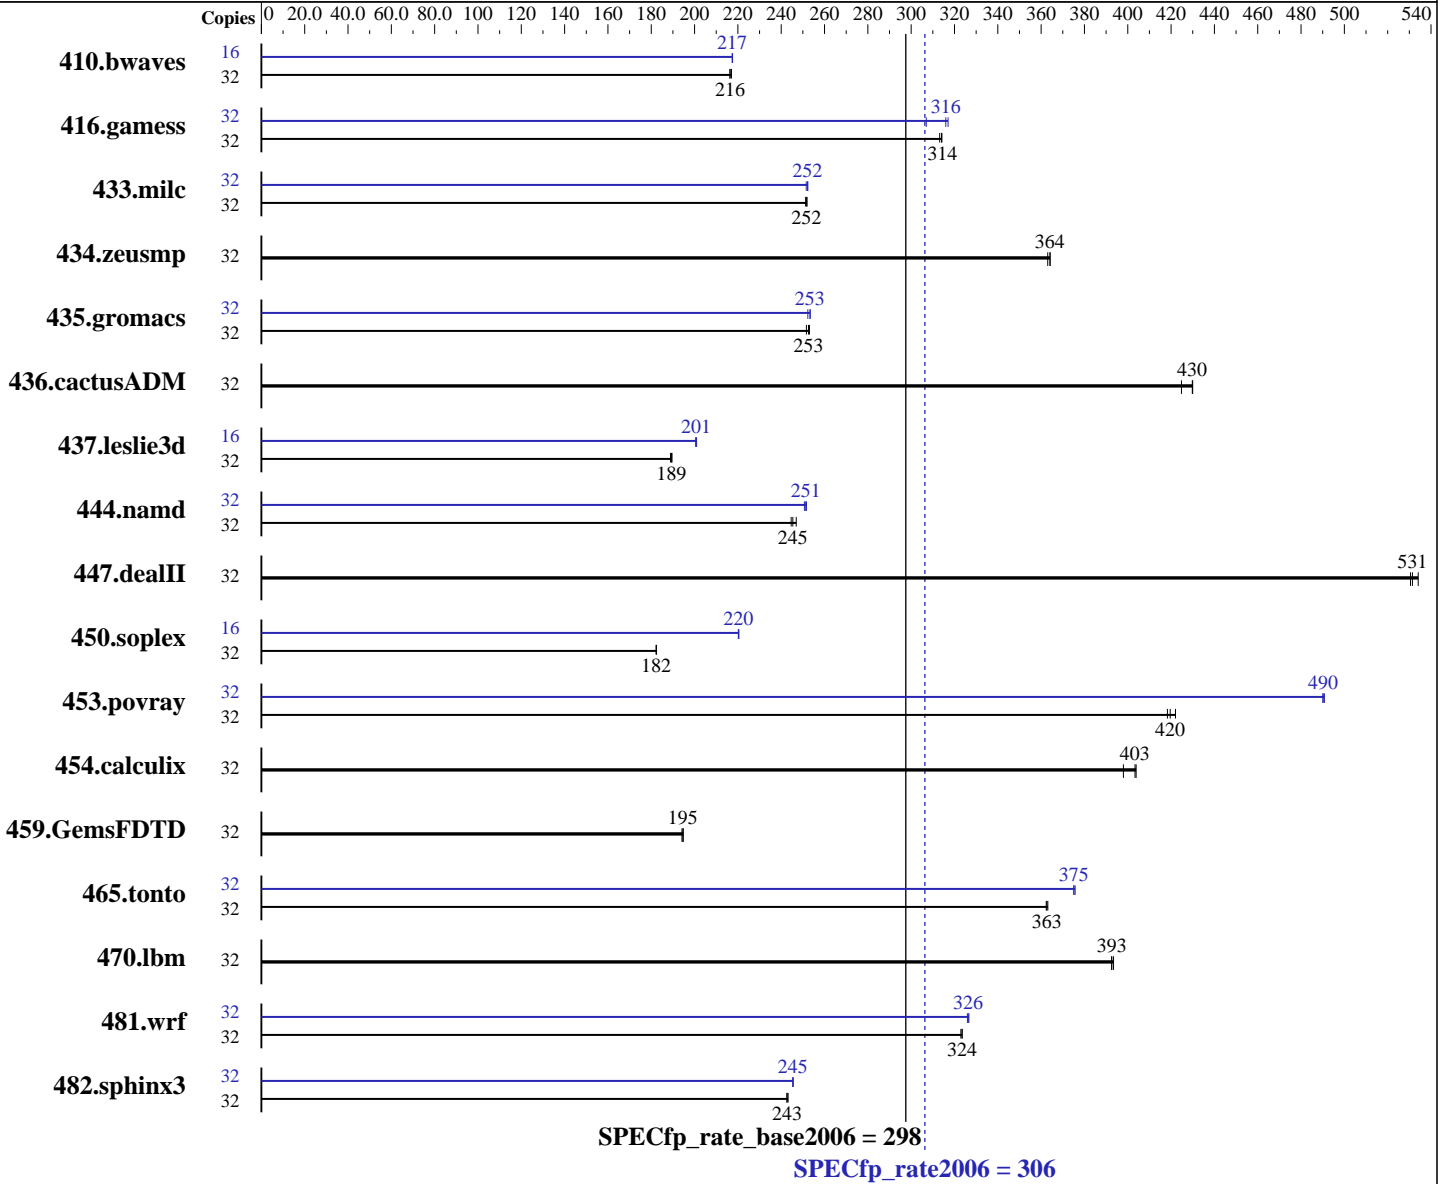

### Hardware

CPU Name: Intel Xeon E5-2448L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

SPECfp\_rate2006 = 306

SPECfp\_rate\_base2006 = 298

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SAS, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>2010</b>	<b>216</b>	2010	216	2004	217	16	1000	217	<b>1000</b>	<b>217</b>	1000	218
416.gamess	32	2001	313	<b>1995</b>	<b>314</b>	1994	314	32	1976	317	<b>1983</b>	<b>316</b>	2041	307
433.milc	32	<b>1167</b>	<b>252</b>	1166	252	1169	251	32	1164	252	1168	252	<b>1165</b>	<b>252</b>
434.zeusmp	32	802	363	<b>800</b>	<b>364</b>	800	364	32	802	363	<b>800</b>	<b>364</b>	800	364
435.gromacs	32	903	253	908	252	<b>905</b>	<b>253</b>	32	<b>902</b>	<b>253</b>	902	253	906	252
436.cactusADM	32	900	425	889	430	<b>890</b>	<b>430</b>	32	900	425	889	430	<b>890</b>	<b>430</b>
437.leslie3d	32	1587	190	<b>1589</b>	<b>189</b>	1593	189	16	<b>749</b>	<b>201</b>	750	201	749	201
444.namd	32	1049	245	1039	247	<b>1046</b>	<b>245</b>	32	1020	252	<b>1021</b>	<b>251</b>	1024	251
447.dealII	32	690	531	685	534	<b>689</b>	<b>531</b>	32	690	531	685	534	<b>689</b>	<b>531</b>
450.soplex	32	<b>1464</b>	<b>182</b>	1463	182	1464	182	16	<b>606</b>	<b>220</b>	606	220	605	220
453.povray	32	407	418	403	422	<b>406</b>	<b>420</b>	32	347	491	347	490	<b>347</b>	<b>490</b>
454.calculix	32	654	404	663	398	<b>655</b>	<b>403</b>	32	654	404	663	398	<b>655</b>	<b>403</b>
459.GemsFDTD	32	1743	195	1748	194	<b>1744</b>	<b>195</b>	32	1743	195	1748	194	<b>1744</b>	<b>195</b>
465.tonto	32	869	362	<b>868</b>	<b>363</b>	867	363	32	<b>839</b>	<b>375</b>	839	375	838	376
470.lbm	32	1118	393	<b>1120</b>	<b>393</b>	1120	393	32	1118	393	<b>1120</b>	<b>393</b>	1120	393
481.wrf	32	1105	324	1107	323	<b>1105</b>	<b>324</b>	32	1097	326	1094	327	<b>1095</b>	<b>326</b>
482.sphinx3	32	2565	243	<b>2569</b>	<b>243</b>	2571	243	32	2542	245	2540	246	<b>2541</b>	<b>245</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

**SPECfp\_rate2006 = 306**

**SPECfp\_rate\_base2006 = 298**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## Platform Notes (Continued)

running on kestral-pete Fri Aug 10 10:14:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2448L 0 @ 1.80GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      99042280 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux kestral-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 9 15:25
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_kestralpete-lv_root
                ext4      449G  6.2G  420G   2% /
```

```
Additional information from dmidecode:
Memory:
12x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

**SPECfp\_rate2006 = 306**

**SPECfp\_rate\_base2006 = 298**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

**SPECfp\_rate2006 = 306**

**SPECfp\_rate\_base2006 = 298**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64`

`416.gamess: -DSPEC_CPU_LP64`

`433.milc: -DSPEC_CPU_LP64`

`434.zeusmp: -DSPEC_CPU_LP64`

`435.gromacs: -DSPEC_CPU_LP64 -nofor_main`

`436.cactusADM: -DSPEC_CPU_LP64 -nofor_main`

`437.leslie3d: -DSPEC_CPU_LP64`

`444.namd: -DSPEC_CPU_LP64`

`447.deallI: -DSPEC_CPU_LP64`

`453.povray: -DSPEC_CPU_LP64`

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

**SPECfp\_rate2006 = 306**

**SPECfp\_rate\_base2006 = 298**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x220  
(Intel Xeon E5-2448L, 1.80 GHz)

**SPECfp\_rate2006 = 306**

**SPECfp\_rate\_base2006 = 298**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:46:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.