



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55


Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

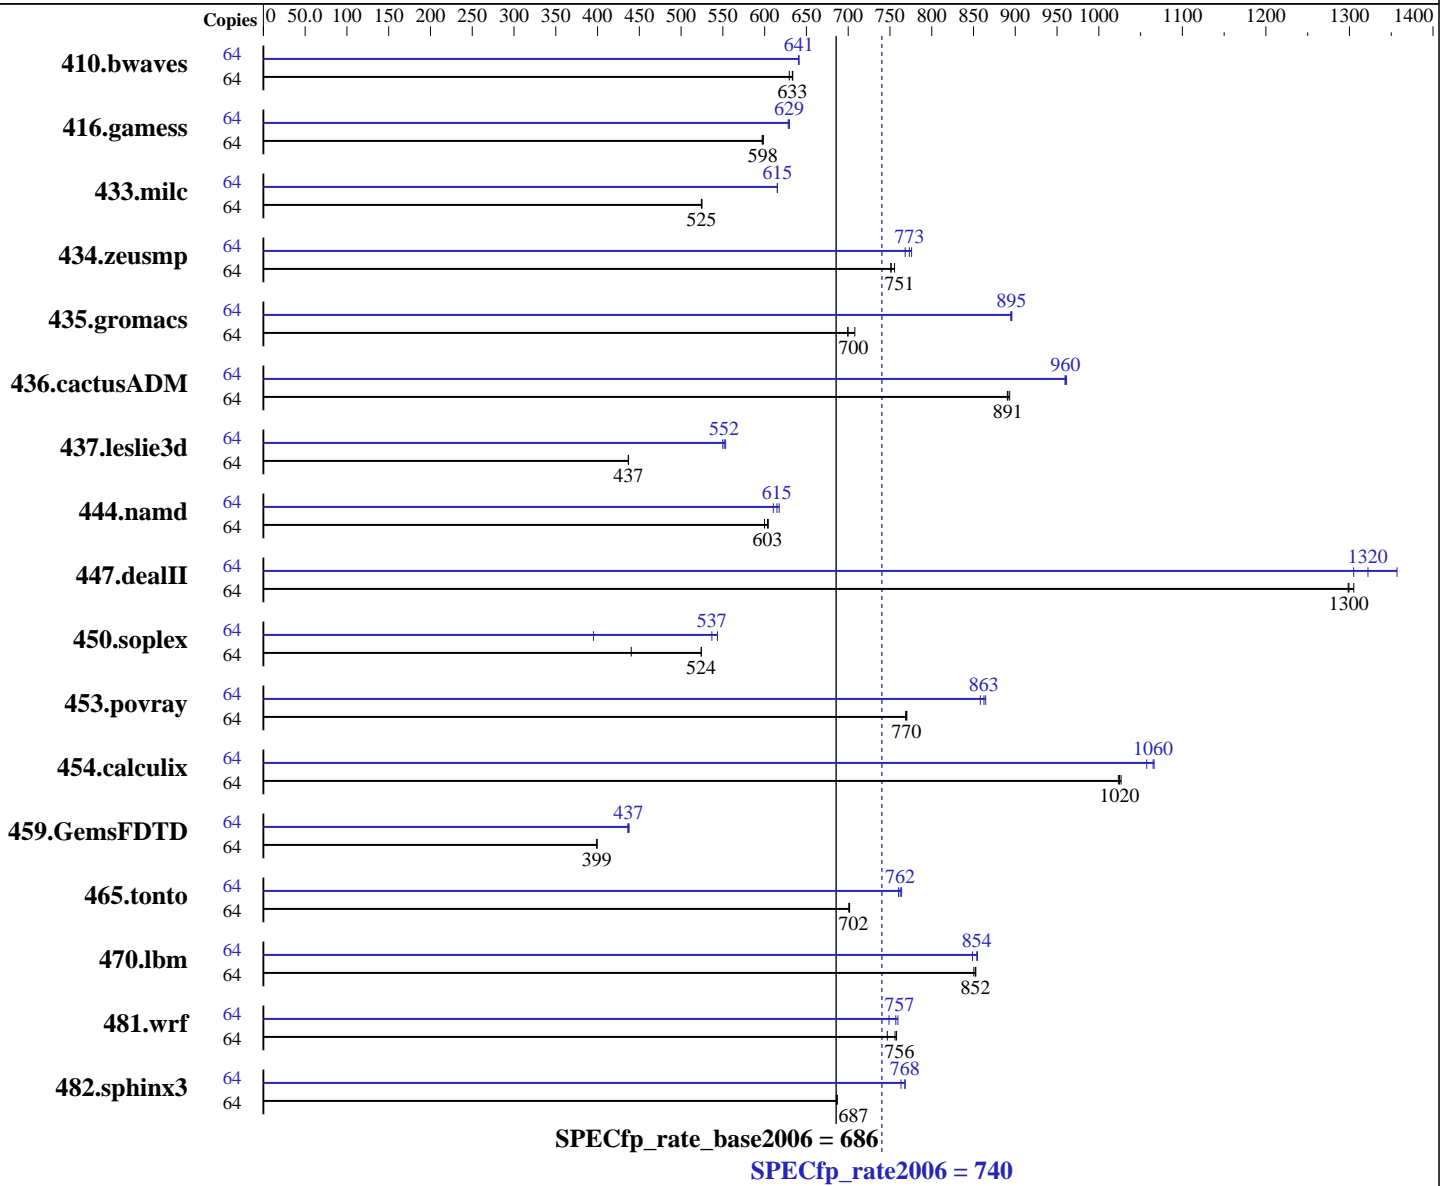

### Hardware

CPU Name: AMD Opteron 6274  
 CPU Characteristics: AMD Turbo CORE technology up to 3.10 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 300 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	1382	629	<u>1374</u>	<u>633</u>	1372	634	64	1357	641	1358	641	<u>1357</u>	<u>641</u>		
416.gamess	64	2099	597	<u>2096</u>	<u>598</u>	2094	598	64	1995	628	1990	630	<u>1992</u>	<u>629</u>		
433.milc	64	1121	524	1119	525	<u>1120</u>	<u>525</u>	64	955	615	<u>955</u>	<u>615</u>	955	615		
434.zeusmp	64	775	751	771	756	<u>775</u>	<u>751</u>	64	751	776	<u>753</u>	<u>773</u>	758	768		
435.gromacs	64	645	708	653	699	<u>653</u>	<u>700</u>	64	<u>510</u>	<u>895</u>	511	895	510	896		
436.cactusADM	64	856	893	<u>858</u>	<u>891</u>	859	891	64	<u>797</u>	<u>960</u>	797	960	795	961		
437.leslie3d	64	1377	437	1376	437	<u>1377</u>	<u>437</u>	64	<u>1091</u>	<u>552</u>	1087	553	1094	550		
444.namd	64	856	600	<u>851</u>	<u>603</u>	849	604	64	841	610	<u>835</u>	<u>615</u>	831	617		
447.dealII	64	561	1310	<u>563</u>	<u>1300</u>	564	1300	64	<u>554</u>	<u>1320</u>	561	1310	540	1360		
450.soplex	64	1212	440	<u>1018</u>	<u>524</u>	1018	524	64	1351	395	<u>994</u>	<u>537</u>	982	544		
453.povray	64	443	769	<u>442</u>	<u>770</u>	442	770	64	397	858	<u>395</u>	<u>863</u>	394	865		
454.calculix	64	<u>515</u>	<u>1020</u>	514	1030	516	1020	64	495	1070	<u>496</u>	<u>1060</u>	499	1060		
459.GemsFDTD	64	1701	399	1701	399	<u>1701</u>	<u>399</u>	64	1551	438	1557	436	<u>1553</u>	<u>437</u>		
465.tonto	64	897	702	<u>898</u>	<u>702</u>	899	701	64	<u>826</u>	<u>762</u>	828	760	824	764		
470.lbm	64	1034	850	1031	853	<u>1032</u>	<u>852</u>	64	1029	855	1036	849	<u>1030</u>	<u>854</u>		
481.wrf	64	957	747	943	758	<u>945</u>	<u>756</u>	64	955	749	941	760	<u>944</u>	<u>757</u>		
482.sphinx3	64	1819	686	1816	687	<u>1816</u>	<u>687</u>	64	1634	763	1624	768	<u>1625</u>	<u>768</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

```

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:ignore\_feedback=off  
 -INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE\_arith=3  
 -OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
 -fno-exceptions -CG:p2align=0 -m32 -HP:bd=2m:heap=2m  
 -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
 -CG:p2align=0 -CG:p2align\_split=on -CG:dsched=on  
 -INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
 -OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
 -LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
 -LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
 -WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
 -LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
 -IPA:plimit=1500 -HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
 -LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll\_size=0  
 -LNO:fission=2 -CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
 -HP:bd=2m:heap=2m

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
 -HP:bd=2m:heap=2m -CG:local\_sched\_alg=2 -GRA:unspill=ON  
 -CG:load\_exe=3 -LNO:simd=3

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
 -LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
 -CG:dsched=on -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 740

PowerEdge M915 (AMD Opteron 6274, 2.20 GHz)

SPECfp\_rate\_base2006 = 686

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:58:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.