



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 45.9

Express5800/GT110e-S (Intel Core i3-3240)

SPECint_base2006 = 43.4

CPU2006 license: 9006


Test date: Oct-2012

Test sponsor: NEC Corporation

Hardware Availability: Oct-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

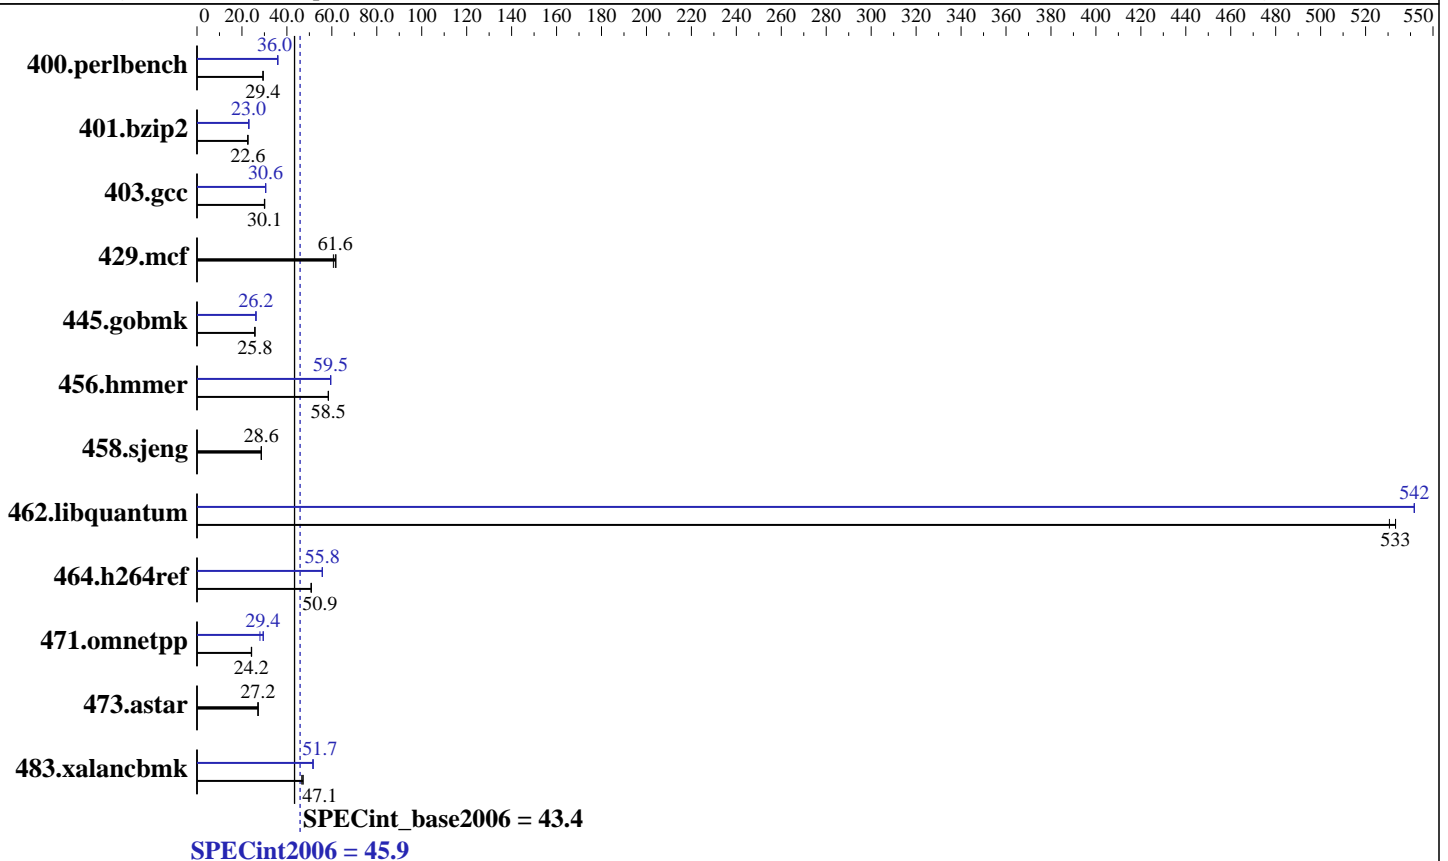

Hardware

CPU Name: Intel Core i3-3240
 CPU Characteristics:
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.9

Express5800/GT110e-S (Intel Core i3-3240)

SPECint_base2006 = 43.4

CPU2006 license: 9006

Test date: Oct-2012

Test sponsor: NEC Corporation

Hardware Availability: Oct-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	332	29.4	<u>332</u>	<u>29.4</u>	332	29.4	272	35.9	272	36.0	<u>272</u>	<u>36.0</u>
401.bzip2	426	22.7	<u>427</u>	<u>22.6</u>	427	22.6	418	23.1	419	23.0	<u>419</u>	<u>23.0</u>
403.gcc	267	30.1	<u>267</u>	<u>30.1</u>	268	30.0	264	30.5	<u>263</u>	<u>30.6</u>	263	30.6
429.mcf	<u>148</u>	<u>61.6</u>	147	61.9	150	60.7	<u>148</u>	<u>61.6</u>	147	61.9	150	60.7
445.gobmk	<u>407</u>	<u>25.8</u>	407	25.8	407	25.8	<u>400</u>	<u>26.2</u>	400	26.2	400	26.2
456.hammer	160	58.4	160	58.5	<u>160</u>	<u>58.5</u>	157	59.5	<u>157</u>	<u>59.5</u>	157	59.5
458.sjeng	423	28.6	422	28.6	<u>423</u>	<u>28.6</u>	423	28.6	422	28.6	<u>423</u>	<u>28.6</u>
462.libquantum	39.1	531	38.8	533	<u>38.9</u>	<u>533</u>	38.3	542	38.2	542	<u>38.2</u>	<u>542</u>
464.h264ref	<u>435</u>	<u>50.9</u>	435	50.9	436	50.8	<u>397</u>	<u>55.8</u>	397	55.8	397	55.7
471.omnetpp	257	24.3	259	24.2	<u>258</u>	<u>24.2</u>	212	29.5	223	28.0	<u>213</u>	<u>29.4</u>
473.astar	258	27.2	<u>258</u>	<u>27.2</u>	258	27.2	258	27.2	<u>258</u>	<u>27.2</u>	258	27.2
483.xalancbmk	146	47.2	<u>146</u>	<u>47.1</u>	148	46.6	<u>134</u>	<u>51.7</u>	134	51.7	134	51.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Default BIOS settings were used.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP_NUM_THREADS = "2"

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.9

Express5800/GT110e-S (Intel Core i3-3240)

SPECint_base2006 = 43.4

CPU2006 license: 9006

Test date: Oct-2012

Test sponsor: NEC Corporation

Hardware Availability: Oct-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.9

Express5800/GT110e-S (Intel Core i3-3240)

SPECint_base2006 = 43.4

CPU2006 license: 9006

Test date: Oct-2012

Test sponsor: NEC Corporation

Hardware Availability: Oct-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
 -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.9

Express5800/GT110e-S (Intel Core i3-3240)

SPECint_base2006 = 43.4

CPU2006 license: 9006

Test date: Oct-2012

Test sponsor: NEC Corporation

Hardware Availability: Oct-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:07:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.