



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 239

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3


Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

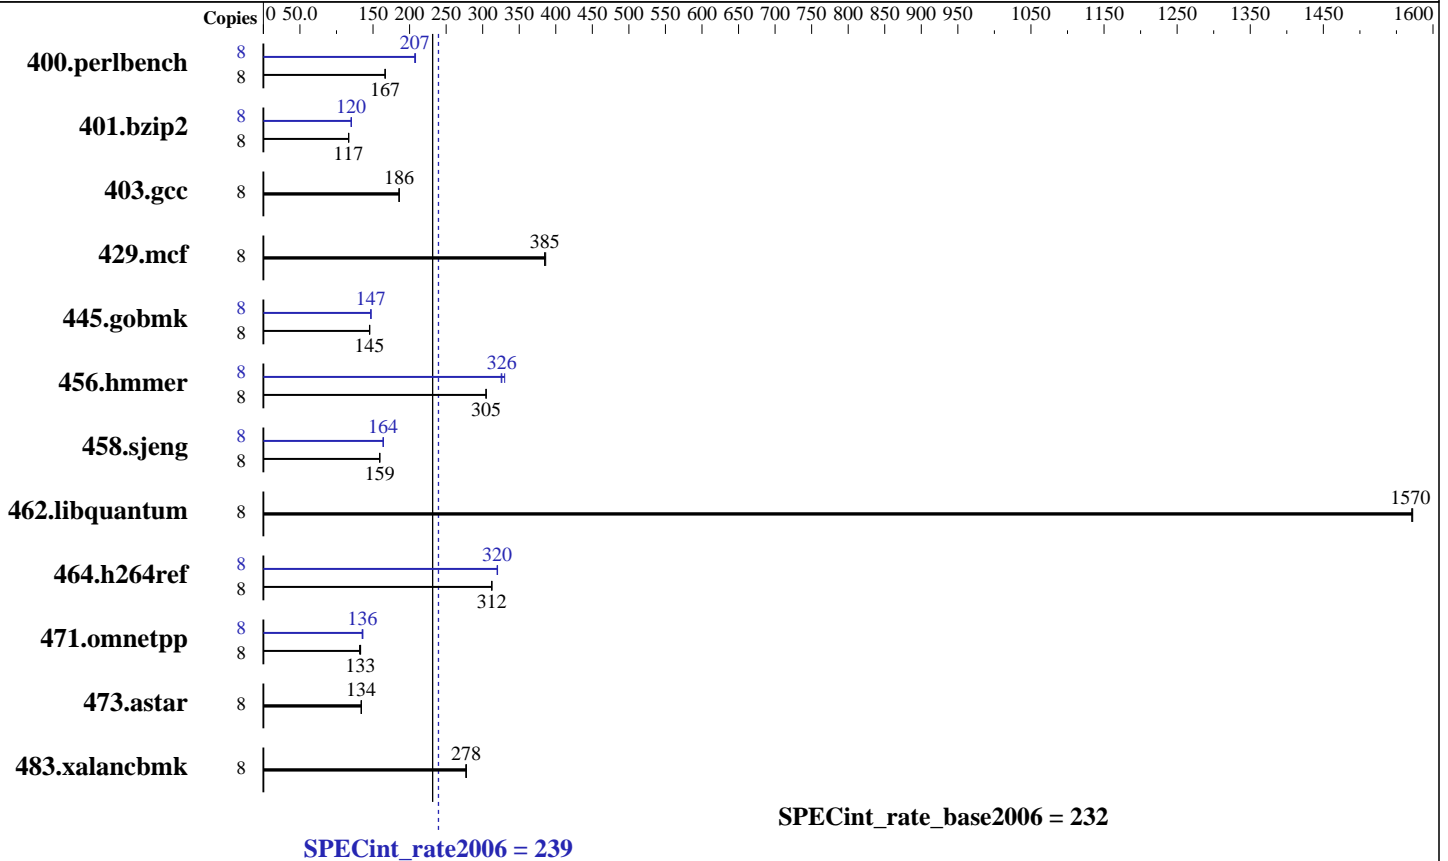

### Hardware

CPU Name: Intel Xeon E5-2407 v2  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 1 TB 7.2 K SATA, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 239

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Feb-2014  
Hardware Availability: Jan-2014  
Software Availability: Sep-2013

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>469</b>	<b>167</b>	469	167	469	167	8	<b>377</b>	<b>207</b>	377	207	376	208
401.bzip2	8	661	117	663	116	<b>662</b>	<b>117</b>	8	<b>642</b>	<b>120</b>	641	120	642	120
403.gcc	8	<b>347</b>	<b>186</b>	347	186	347	186	8	<b>347</b>	<b>186</b>	347	186	347	186
429.mcf	8	190	385	189	386	<b>189</b>	<b>385</b>	8	190	385	189	386	<b>189</b>	<b>385</b>
445.gobmk	8	<b>577</b>	<b>145</b>	577	146	578	145	8	<b>570</b>	<b>147</b>	570	147	571	147
456.hammer	8	<b>245</b>	<b>305</b>	245	305	245	305	8	<b>229</b>	<b>326</b>	226	330	229	325
458.sjeng	8	608	159	608	159	<b>608</b>	<b>159</b>	8	590	164	590	164	<b>590</b>	<b>164</b>
462.libquantum	8	105	1570	106	1570	<b>105</b>	<b>1570</b>	8	105	1570	106	1570	<b>105</b>	<b>1570</b>
464.h264ref	8	567	312	566	313	<b>567</b>	<b>312</b>	8	553	320	553	320	<b>553</b>	<b>320</b>
471.omnetpp	8	376	133	<b>376</b>	<b>133</b>	380	132	8	370	135	<b>368</b>	<b>136</b>	368	136
473.astar	8	419	134	419	134	<b>419</b>	<b>134</b>	8	419	134	419	134	<b>419</b>	<b>134</b>
483.xalancbmk	8	<b>199</b>	<b>278</b>	199	277	199	278	8	<b>199</b>	<b>278</b>	199	277	199	278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Used "stop-services" script before the run

### Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Memory Power Savings Mode set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 239

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

SPECint\_rate\_base2006 = 232

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2014  
**Hardware Availability:** Jan-2014  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on DL380e-Gen8-012 Sat Feb 22 05:14:18 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2407 v2 @ 2.40GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      99032836 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL380e-Gen8-012 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 22 05:09

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      915G   82G  788G  10% /
```

```
Additional information from dmidecode:
BIOS HP P73 11/12/2013
Memory:
12x HP 689911-071 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 239**

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

**SPECint\_rate\_base2006 = 232**

**CPU2006 license:** 3

**Test date:** Feb-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 239

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 239**

ProLiant DL380e Gen8  
(2.40 GHz, Intel Xeon E5-2407 v2)

**SPECint\_rate\_base2006 = 232**

**CPU2006 license:** 3

**Test date:** Feb-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:51:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.