



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = **78.5**

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = **76.9**

CPU2006 license: 3


Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

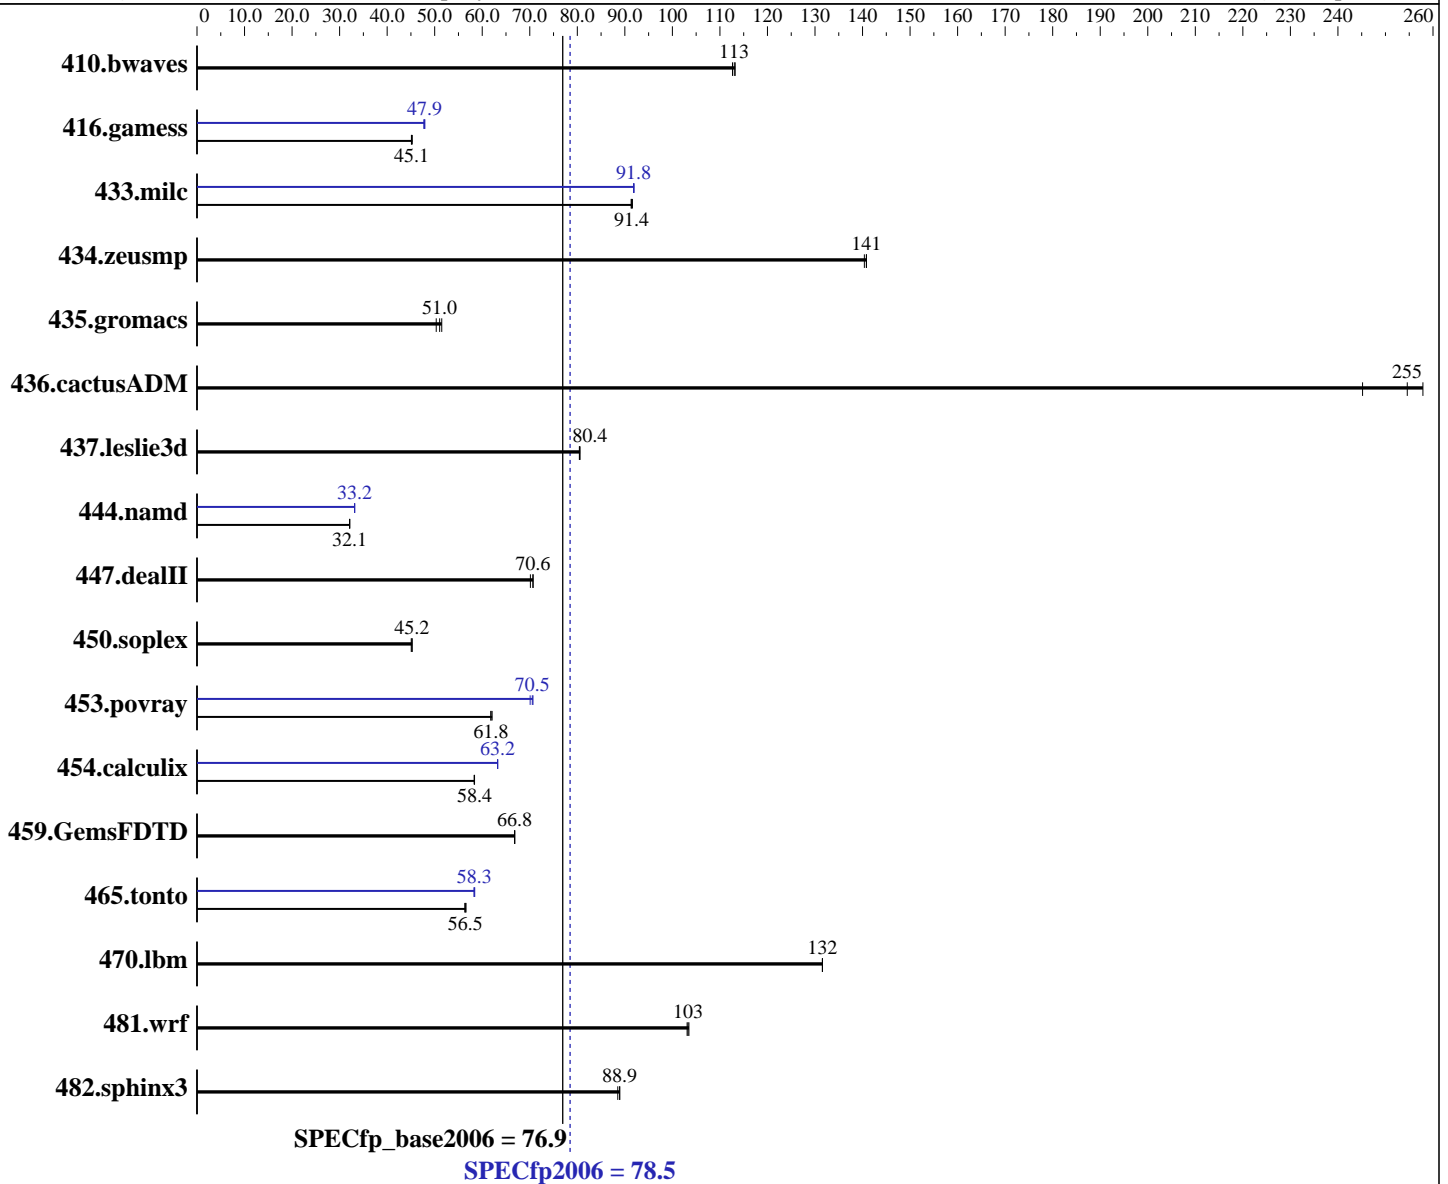

Hardware

CPU Name: Intel Xeon E3-1281 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **78.5**

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = **76.9**

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	121	113	120	113	120	113	121	113	120	113	120	113
416.gamess	432	45.3	434	45.1	434	45.1	409	47.9	409	47.9	410	47.7
433.milc	100	91.4	100	91.6	101	91.3	100	91.8	99.8	92.0	100	91.8
434.zeusmp	64.6	141	64.8	140	64.6	141	64.6	141	64.8	140	64.6	141
435.gromacs	140	51.0	139	51.5	142	50.3	140	51.0	139	51.5	142	50.3
436.cactusADM	46.9	255	46.3	258	48.7	245	46.9	255	46.3	258	48.7	245
437.leslie3d	117	80.4	117	80.4	117	80.6	117	80.4	117	80.4	117	80.6
444.namd	250	32.1	250	32.1	250	32.1	242	33.2	242	33.2	242	33.2
447.dealII	162	70.6	163	70.1	162	70.7	162	70.6	163	70.1	162	70.7
450.soplex	184	45.3	184	45.2	185	45.1	184	45.3	184	45.2	185	45.1
453.povray	86.0	61.8	86.1	61.8	85.7	62.1	75.4	70.5	75.9	70.1	75.3	70.7
454.calculix	142	58.3	141	58.4	141	58.4	130	63.3	130	63.2	131	63.2
459.GemsFDTD	159	66.8	159	66.8	159	66.8	159	66.8	159	66.8	159	66.8
465.tonto	175	56.3	174	56.5	174	56.6	168	58.4	169	58.3	169	58.3
470.lbm	104	132	104	132	104	132	104	132	104	132	104	132
481.wrf	108	103	108	103	108	103	108	103	108	103	108	103
482.sphinx3	219	88.9	220	88.5	219	88.9	219	88.9	220	88.5	219	88.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C6 State
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 78.5

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = 76.9

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes (Continued)

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on XL220a-Gen8-v2 Thu May 15 23:27:29 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E3-1281 v3 @ 3.70GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 4
  siblings      : 4
  physical 0:   cores 0 1 2 3
cache size      : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16291732 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux XL220a-Gen8-v2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 15 18:13 last=S
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext3  271G  11G  260G   4% /
```

```
Additional information from dmidecode:
BIOS HP P94 04/29/2014
Memory:
4x HP 669238-071 4 GB 1600 MHz
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 78.5

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = 76.9

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 78.5

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = 76.9

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 78.5

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp_base2006 = 76.9

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant XL220a Gen8 v2
(3.70 GHz, Intel Xeon E3-1281 v3)

SPECfp2006 = 78.5

SPECfp_base2006 = 76.9

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:55:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2014.