



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

### SPECfp<sup>®</sup>\_rate2006 = Not Run

### Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

### SPECfp\_rate\_base2006 = 2000

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

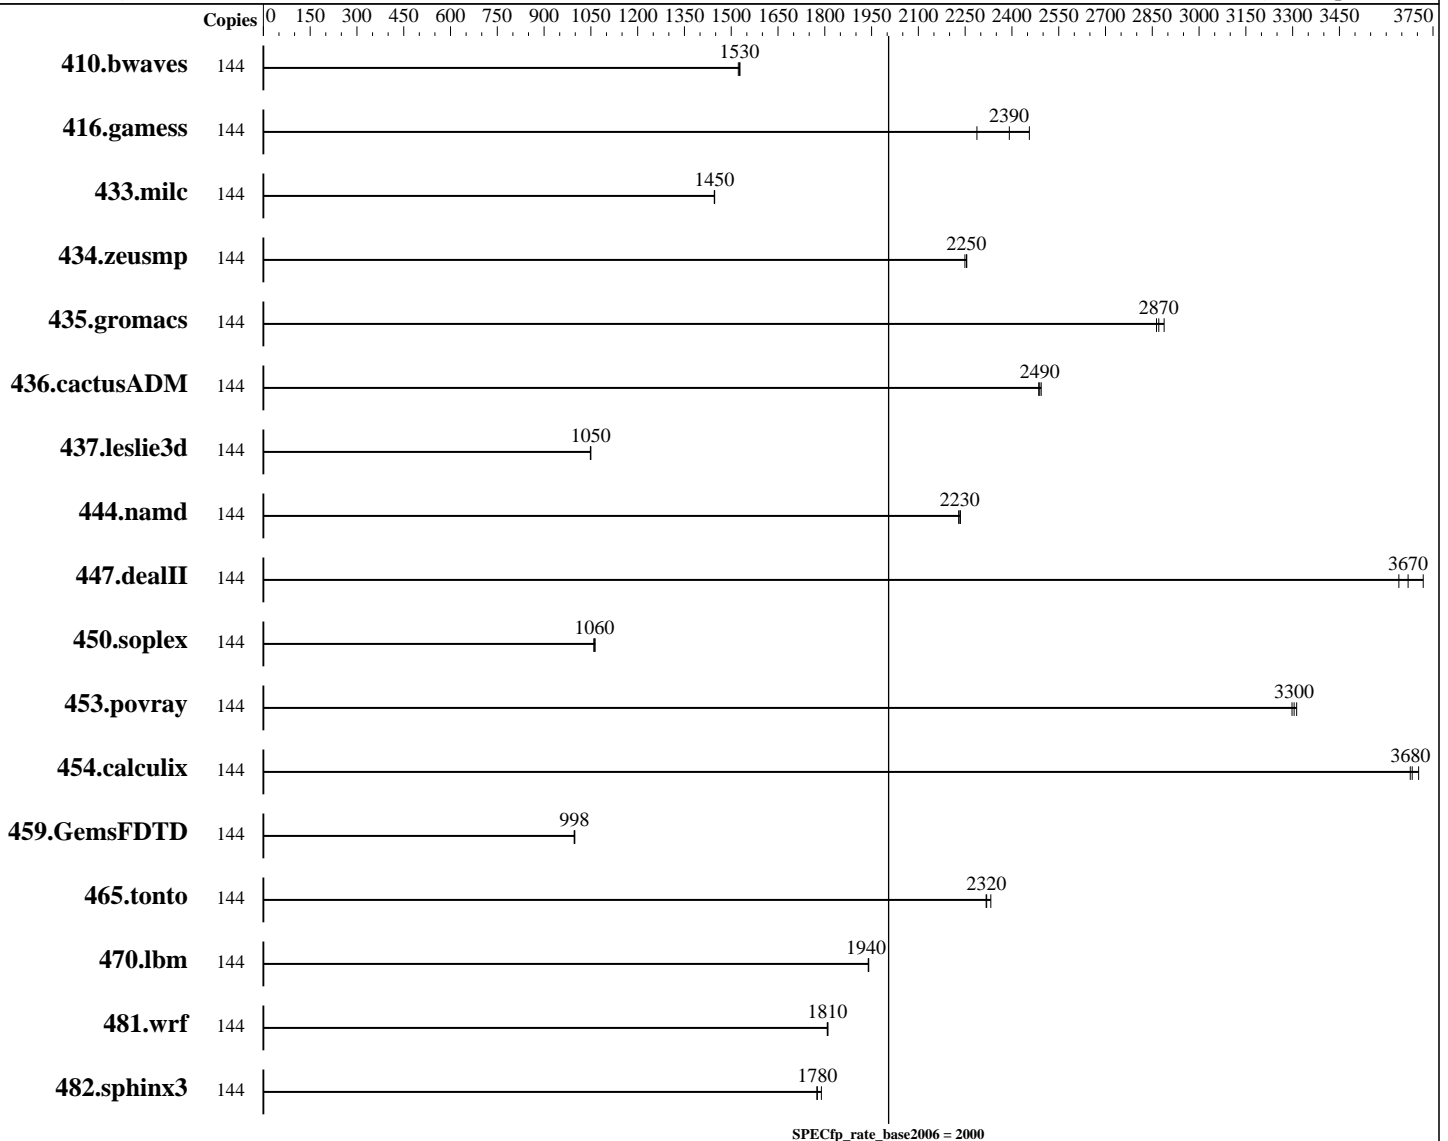

### Hardware

CPU Name: Intel Xeon E7-8890 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 2000

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	1281	1530	1285	1520	<b>1282</b>	<b>1530</b>							
416.gamess	144	<b>1179</b>	<b>2390</b>	1148	2460	1232	2290							
433.milc	144	<b>914</b>	<b>1450</b>	914	1450	914	1450							
434.zeusmp	144	581	2260	583	2250	<b>581</b>	<b>2250</b>							
435.gromacs	144	356	2890	<b>358</b>	<b>2870</b>	359	2860							
436.cactusADM	144	690	2490	<b>691</b>	<b>2490</b>	692	2490							
437.leslie3d	144	1290	1050	1291	1050	<b>1290</b>	<b>1050</b>							
444.namd	144	<b>517</b>	<b>2230</b>	517	2230	518	2230							
447.dealII	144	453	3640	443	3720	<b>449</b>	<b>3670</b>							
450.soplex	144	1129	1060	<b>1132</b>	<b>1060</b>	1134	1060							
453.povray	144	231	3310	<b>232</b>	<b>3300</b>	232	3300							
454.calculix	144	323	3680	<b>323</b>	<b>3680</b>	321	3700							
459.GemsFDTD	144	1533	996	<b>1531</b>	<b>998</b>	1530	998							
465.tonto	144	<b>611</b>	<b>2320</b>	608	2330	611	2320							
470.lbm	144	1019	1940	1020	1940	<b>1020</b>	<b>1940</b>							
481.wrf	144	889	1810	890	1810	<b>889</b>	<b>1810</b>							
482.sphinx3	144	1569	1790	<b>1580</b>	<b>1780</b>	1581	1770							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with:  
cpupower -c all frequency-set -g performance



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 2000

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set DRAM Maintenance to Manual

Set DRAM Maintenance Mode to pTRR

Set Patrol Scrub to Enabled

Set Memory Power Saving to disabled

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on RH5885HV3 Sat Mar 14 18:28:23 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz

4 "physical id"s (chips)

144 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

cache size : 46080 KB

From /proc/meminfo

MemTotal: 1056464428 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.0"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.0:ga:server

uname -a:

Linux RH5885HV3 3.10.0-123.el7.x86\_64 #1 SMP Mon May 5 11:16:57 EDT 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 2000

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 14 12:04

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	ext4	481G	73G	384G	16%	/spec

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV701 3/5/2015

Memory:

32x NO DIMM NO DIMM

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have two lines reading as:

32x NO DIMM NO DIMM

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 2000

CPU2006 license: 3175

Test date: Mar-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.html>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885H V3 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 2000

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Mar-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 2 13:45:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 June 2015.