



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = **119**

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = **115**

CPU2006 license: 9006


Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Aug-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

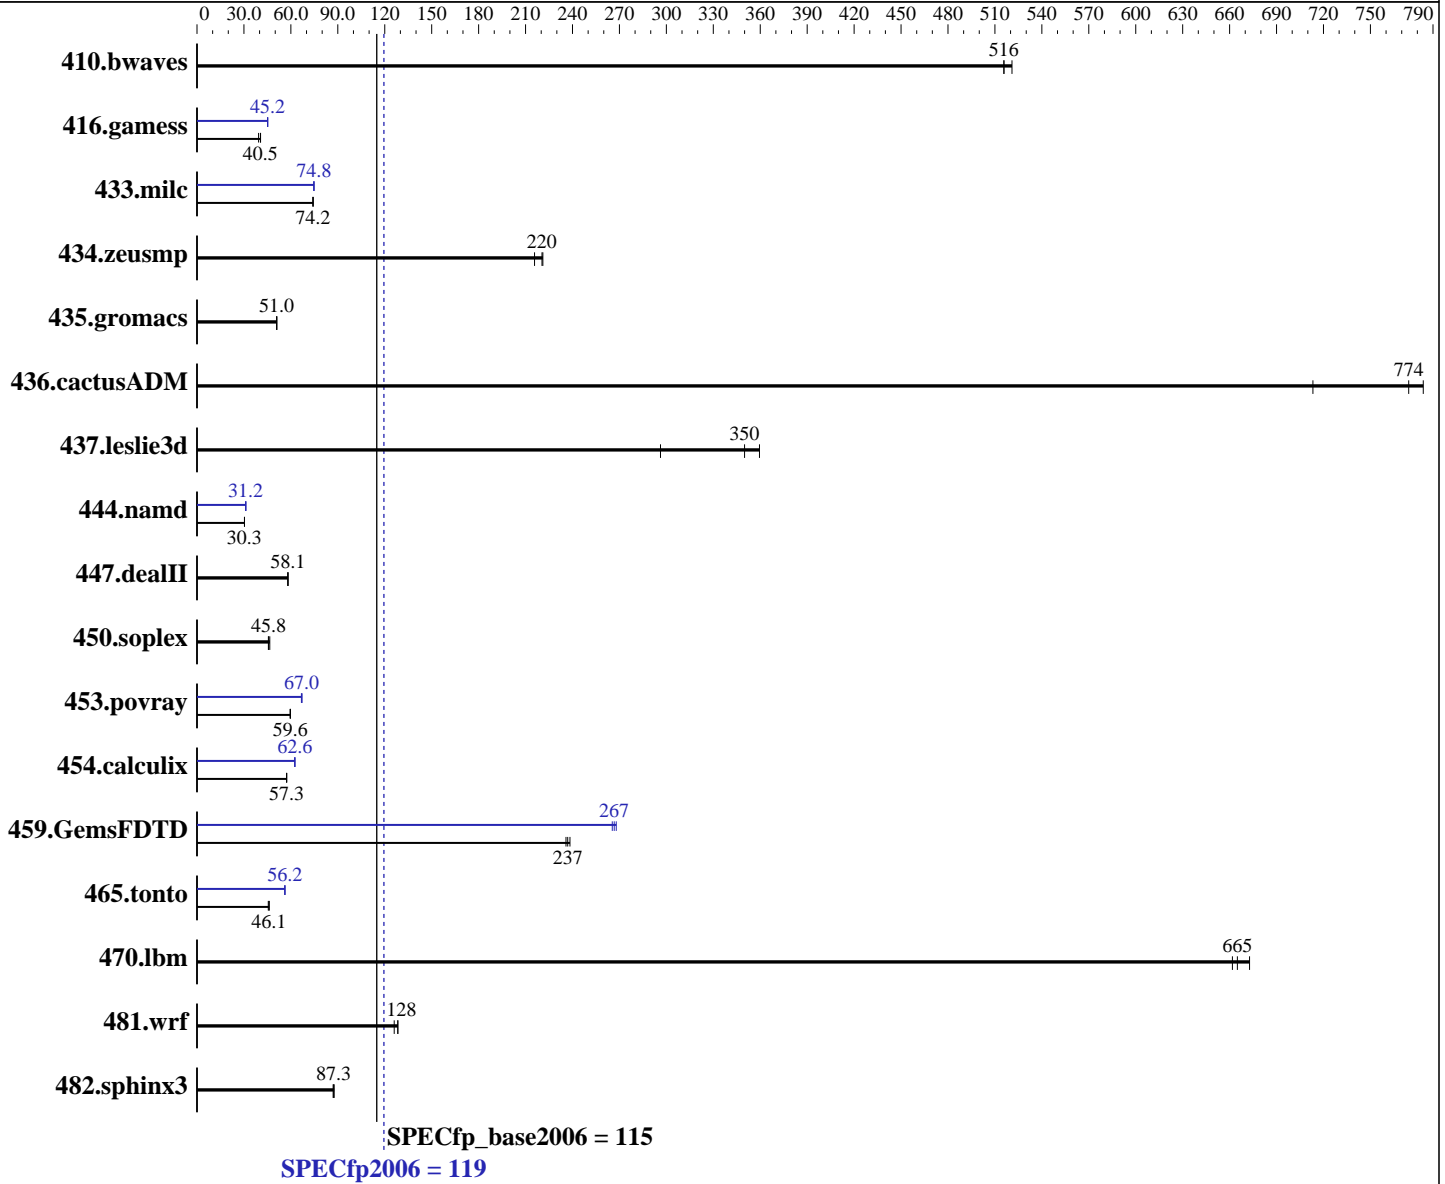

Hardware

CPU Name: Intel Xeon E5-2667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Kernel 2.6.32-504.el6.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **119**

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = **115**

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Aug-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: NEC Storage M100 via Fibre Channel
 (See additional details below)
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	26.1	521	26.3	516	26.4	516	26.1	521	26.3	516	26.4	516
416.gamess	482	40.6	498	39.4	483	40.5	434	45.2	433	45.2	434	45.1
433.milc	124	74.3	124	74.1	124	74.2	123	74.8	123	74.7	123	74.8
434.zeusmp	42.2	216	41.2	221	41.3	220	42.2	216	41.2	221	41.3	220
435.gromacs	140	51.0	140	51.0	140	50.9	140	51.0	140	51.0	140	50.9
436.cactusADM	16.8	713	15.2	784	15.4	774	16.8	713	15.2	784	15.4	774
437.leslie3d	31.7	296	26.1	360	26.9	350	31.7	296	26.1	360	26.9	350
444.namd	264	30.3	264	30.3	264	30.4	257	31.2	257	31.2	257	31.2
447.dealII	197	58.2	197	58.1	197	58.0	197	58.2	197	58.1	197	58.0
450.soplex	179	46.5	183	45.6	182	45.8	179	46.5	183	45.6	182	45.8
453.povray	89.1	59.7	89.3	59.6	89.2	59.6	79.7	66.7	79.5	67.0	79.3	67.1
454.calculix	144	57.3	144	57.3	144	57.3	132	62.6	132	62.6	132	62.4
459.GemsFDTD	44.5	238	45.0	236	44.8	237	39.8	267	40.0	265	39.6	268
465.tonto	216	45.6	214	46.1	213	46.1	175	56.2	175	56.1	175	56.2
470.lbm	20.8	662	20.4	673	20.7	665	20.8	662	20.4	673	20.7	665
481.wrf	87.0	128	87.0	128	88.6	126	87.0	128	87.0	128	88.6	126
482.sphinx3	222	87.7	223	87.3	224	87.0	222	87.7	223	87.3	224	87.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Energy Performance: Performance
 Patrol Scrub: Disabled
 Early Snoop: Disabled
 Hyper-Threading: Disabled

Storage Configuration for Disk Subsystem:
 NEC Storage M100 has 4 x 600 GB 10000 RPM SAS disks under RAID-10 configuration
 mounted over 8Gbps Fibre Channel interface with these options

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 119

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 115

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Aug-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Platform Notes (Continued)

"defaults" in the /etc/fstab.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "16"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 119

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 115

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Aug-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 119

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 115

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Aug-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 119

Express5800/B120f-h (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 115

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2015

Hardware Availability: Aug-2015

Software Availability: Oct-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 8 22:41:18 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 September 2015.