



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = **106**

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = **104**

CPU2006 license: 19


Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

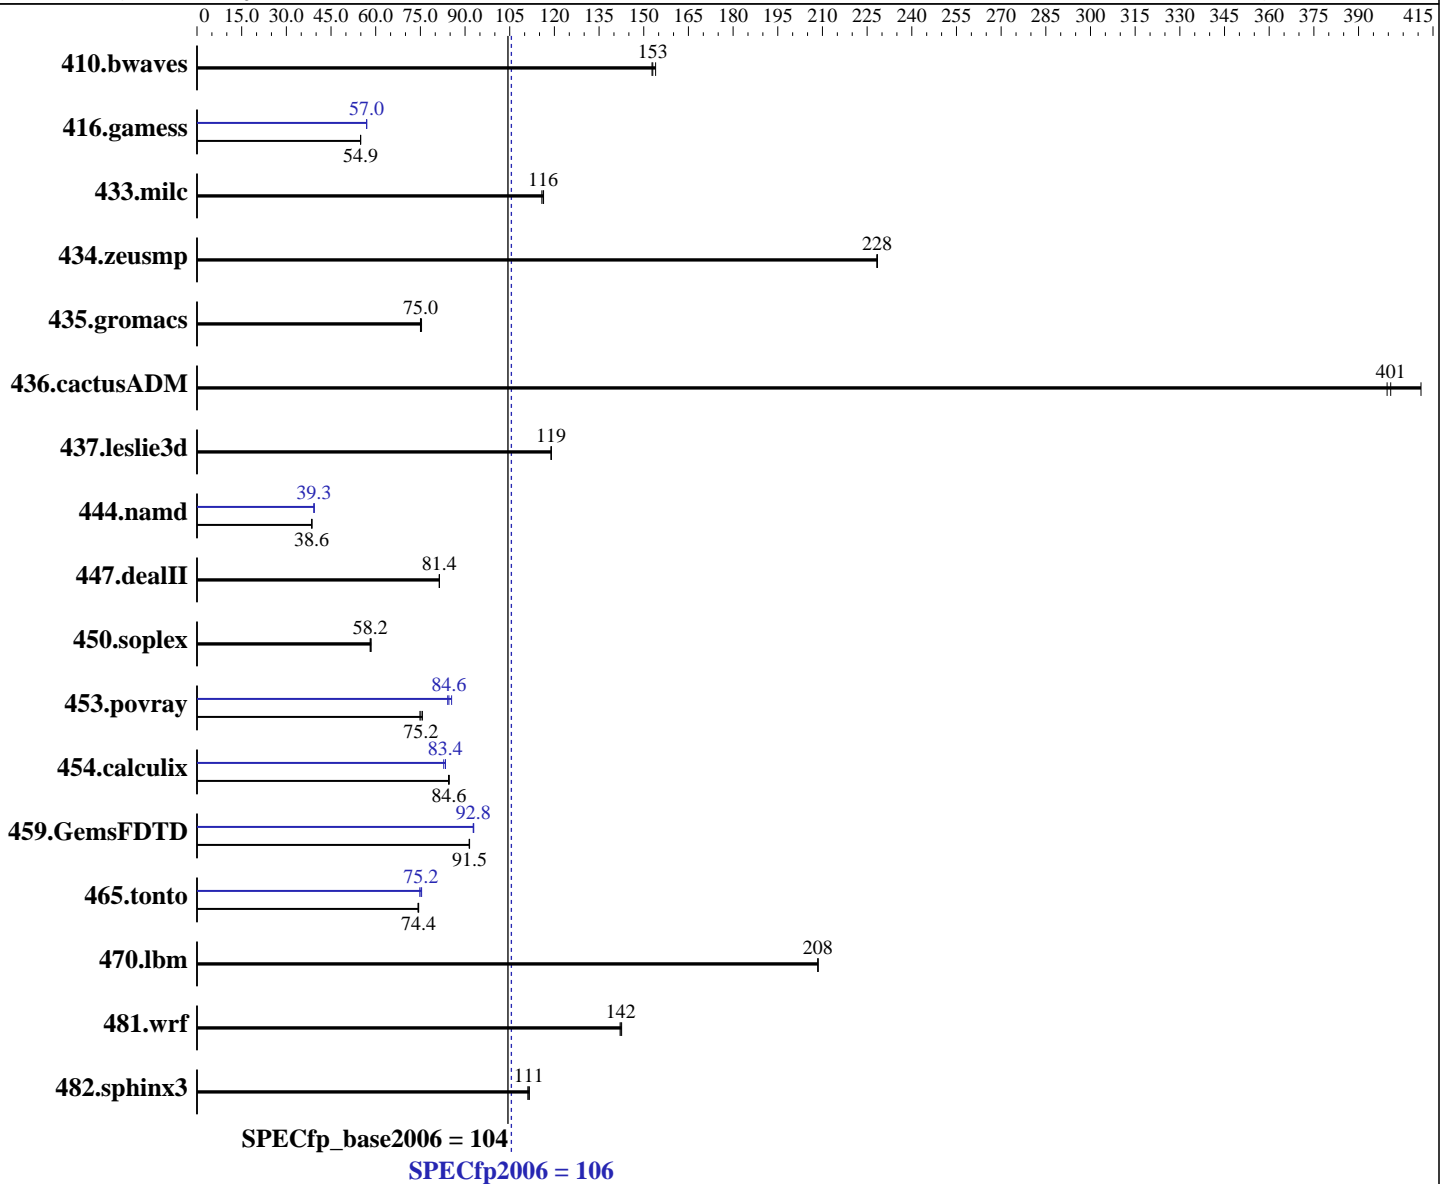

Hardware

CPU Name: Intel Xeon E3-1280 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-68-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **106**

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = **104**

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
 Disk Subsystem: 2 x SAS, 600 GB, 15000 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88.8	153	88.3	154	89.0	153	88.8	153	88.3	154	89.0	153
416.gamess	357	54.9	356	54.9	356	54.9	344	56.9	344	57.0	344	57.0
433.milc	78.9	116	79.3	116	79.0	116	78.9	116	79.3	116	79.0	116
434.zeusmp	39.9	228	39.8	228	39.8	228	39.9	228	39.8	228	39.8	228
435.gromacs	94.7	75.4	95.1	75.0	95.2	75.0	94.7	75.4	95.1	75.0	95.2	75.0
436.cactusADM	29.1	411	29.9	400	29.8	401	29.1	411	29.9	400	29.8	401
437.leslie3d	79.0	119	79.1	119	79.0	119	79.0	119	79.1	119	79.0	119
444.namd	208	38.5	208	38.6	208	38.6	204	39.3	204	39.3	204	39.3
447.dealII	141	81.4	141	81.3	141	81.4	141	81.4	141	81.3	141	81.4
450.soplex	143	58.5	143	58.2	143	58.2	143	58.5	143	58.2	143	58.2
453.povray	70.3	75.7	70.7	75.2	71.1	74.9	63.2	84.2	62.2	85.5	62.9	84.6
454.calculix	97.4	84.7	97.5	84.6	97.7	84.4	98.9	83.4	99.6	82.8	98.9	83.4
459.GemsFDTD	116	91.4	116	91.5	116	91.5	114	92.8	114	92.7	114	92.9
465.tonto	133	74.2	132	74.4	132	74.4	131	75.2	130	75.4	132	74.8
470.lbm	65.9	208	65.9	209	65.9	208	65.9	208	65.9	209	65.9	208
481.wrf	78.6	142	78.3	143	78.5	142	78.6	142	78.3	143	78.5	142
482.sphinx3	175	111	175	111	175	112	175	111	175	111	175	112

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with :
cpupower -c all frequency-set -g performance
cpupower idle-set -d 2
cpupower idle-set -d 3
cpupower idle-set -d 4
echo always > /sys/kernel/mm/transparent_hugepage/enabled
KMP_AFFINITY = "granularity=fine,scatter"
OMP_NUM_THREADS = "4"
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 106

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = 104

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Platform Notes

BIOS Settings:

Hyper-threading = Disabled

Sysinfo program /home/benchmark/speccpu-20160922-updated/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-l8u9 Mon Mar 6 18:57:24 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 65657200 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-l8u9 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016 (63cf368) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 6 18:47

SPEC is set to: /home/benchmark/speccpu-20160922-updated

Filesystem Type Size Used Avail Use% Mounted on
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 106

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = 104

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: May-2017
Software Availability: Nov-2016

Platform Notes (Continued)

/dev/sda4 xfs 516G 18G 499G 4% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R0.92.0 for D3375-B1x
02/02/2017

Memory:
4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = */home/benchmark/speccpu-20160922-updated/libs/32:/home/benchmark/speccpu-20160922-updated/libs/64:/home/benchmark/speccpu-20160922-updated/sh10.2*

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 106

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = 104

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 106

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = 104

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 106

PRIMERGY RX1330 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECfp_base2006 = 104

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Mar 29 16:29:03 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2017.