



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 13


Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: Dec-2016

Hardware Availability: Jan-2016

Software Availability: Sep-2016

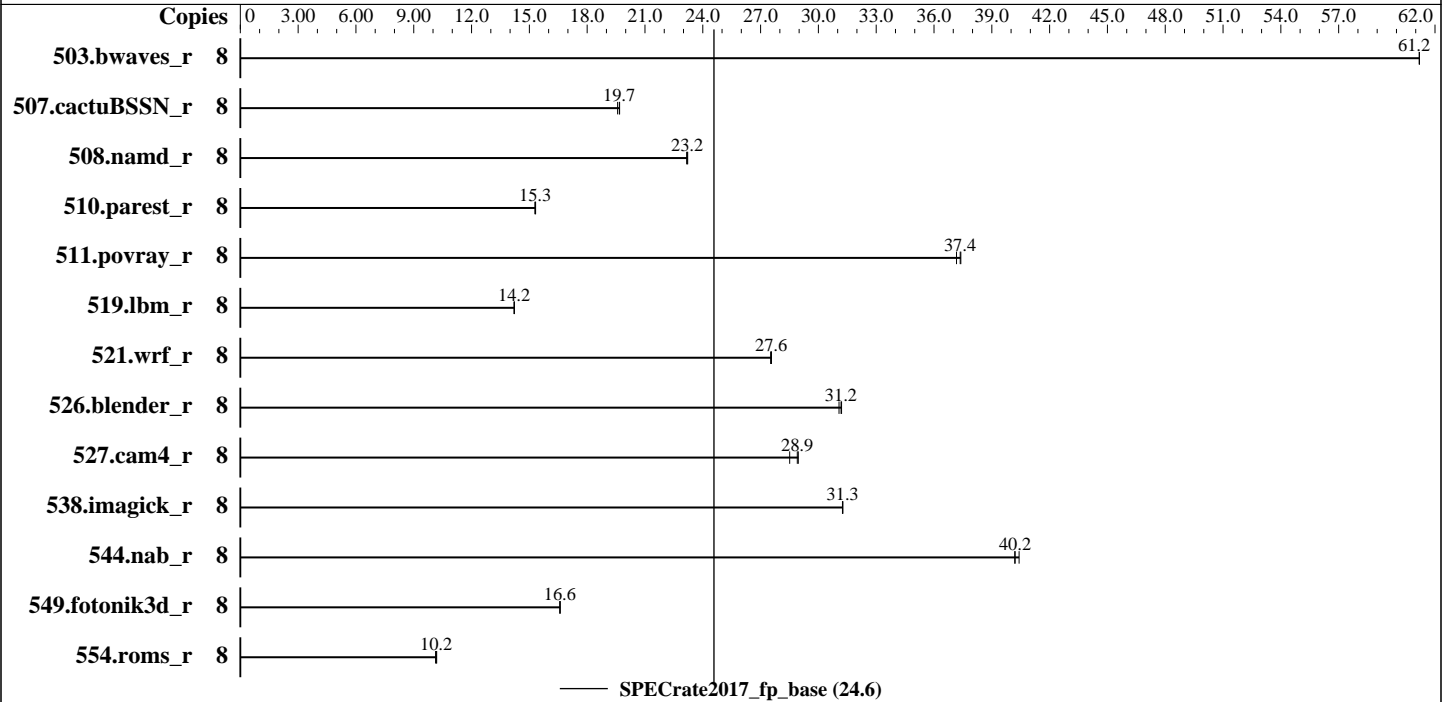

## Hardware

CPU Name: Intel Core i7-6700K  
 Max MHz.: 4200  
 Nominal: 4000  
 Enabled: 4 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 8 MB I+D on chip per chip  
 Other: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3000N-U, running at 2133 MHz, G.SKILL Ripjaws F4-3000C14D-32GVK)  
 Storage: 1.5 TB SATA HDD, 7200RPM  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: American Megatrends Inc. v0701 01/13/2016  
 File System: xfs  
 System State: Run level 5 (Multiuser Networking with GUI)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: Microquill SmartHeap V10.2



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 13  
Test Sponsor: Intel Corporation  
Tested by: Intel Corporation

Test Date: Dec-2016  
Hardware Availability: Jan-2016  
Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	1311	61.2	1311	61.2	<b>1311</b>	<b>61.2</b>							
507.cactuBSSN_r	8	515	19.7	517	19.6	<b>515</b>	<b>19.7</b>							
508.namd_r	8	328	23.2	327	23.2	<b>328</b>	<b>23.2</b>							
510.parest_r	8	1366	15.3	<b>1367</b>	<b>15.3</b>	1369	15.3							
511.povray_r	8	<b>500</b>	<b>37.4</b>	503	37.2	500	37.4							
519.lbm_r	8	<b>593</b>	<b>14.2</b>	593	14.2	593	14.2							
521.wrf_r	8	650	27.6	<b>650</b>	<b>27.6</b>	651	27.5							
526.blender_r	8	<b>391</b>	<b>31.2</b>	390	31.2	392	31.1							
527.cam4_r	8	483	29.0	491	28.5	<b>484</b>	<b>28.9</b>							
538.imagick_r	8	637	31.2	636	31.3	<b>636</b>	<b>31.3</b>							
544.nab_r	8	333	40.4	335	40.2	<b>335</b>	<b>40.2</b>							
549.fotonik3d_r	8	1880	16.6	<b>1879</b>	<b>16.6</b>	1878	16.6							
554.roms_r	8	1248	10.2	1255	10.1	<b>1250</b>	<b>10.2</b>							

SPECrate2017\_fp\_base = 24.6

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = \*/home/specdev/workspace/cpu2017-rc4/lib/ia32:/home/specdev/workspace/cpu2017-rc4/lib/intel64:/home/specdev/workspace/cpu2017-rc4/sh10.2\*

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default

## Platform Notes

Sysinfo program /home/specdev/workspace/cpu2017-rc4/Docs/sysinfo  
Rev: r5007 of 2016-11-15 fc8dc82f217779bedfed4d694d580ba9  
running on mrcarrol-desky Tue Dec 13 11:12:40 2016

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 13

**Test Sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test Date:** Dec-2016

**Hardware Availability:** Jan-2016

**Software Availability:** Sep-2016

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<http://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Core(TM) i7-6700K CPU @ 4.00GHz
```

```
1 "physical id"s (chips)
```

```
8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
```

```
siblings : 8
```

```
physical 0: cores 0 1 2 3
```

```
cache size : 8192 KB
```

The view from numactl --hardware follows. WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
```

```
node 0 cpus: 0 1 2 3 4 5 6 7
```

```
node 0 size: 32655 MB
```

```
node 0 free: 10791 MB
```

```
node distances:
```

```
node 0
```

```
0: 10
```

From /proc/meminfo

```
MemTotal: 32667216 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
```

```
NAME="Red Hat Enterprise Linux Server"
```

```
VERSION="7.2 (Maipo)"
```

```
ID="rhel"
```

```
ID_LIKE="fedora"
```

```
VERSION_ID="7.2"
```

```
PRETTY_NAME=Storage
```

```
ANSI_COLOR="0;31"
```

```
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
```

```
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 13

**Test Sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test Date:** Dec-2016

**Hardware Availability:** Jan-2016

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
Linux mrcarro1-desky 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Dec 7 09:08
```

```
SPEC is set to: /home/specdev/workspace/cpu2017-rc4
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.5T   89G  1.5T   6% /home
```

```
Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'
```

```
(End of data from sysinfo program)
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 13  
**Test Sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test Date:** Dec-2016  
**Hardware Availability:** Jan-2016  
**Software Availability:** Sep-2016

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32 -qopt-prefetch  
-qopt-mem-layout-trans=3

### C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32  
-qopt-prefetch -qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64

### Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs

### Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32 -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs

### Benchmarks using both C and C++:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32  
-qopt-prefetch -qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64

### Benchmarks using Fortran, C, and C++:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32  
-qopt-prefetch -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/sh10.2 -lsmartheap64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revE.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

SPECrate2017\_fp\_base = 24.6

ASUS Z170M-PLUS Motherboard (Intel Core i7-6700K)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 13

**Test Sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test Date:** Dec-2016

**Hardware Availability:** Jan-2016

**Software Availability:** Sep-2016

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v0.904.0 on 2016-12-13 14:12:40-0500.

Report generated on 2017-06-20 11:34:55 by CPU2017 PDF formatter v5748.

Originally published on 2017-06-19.