



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

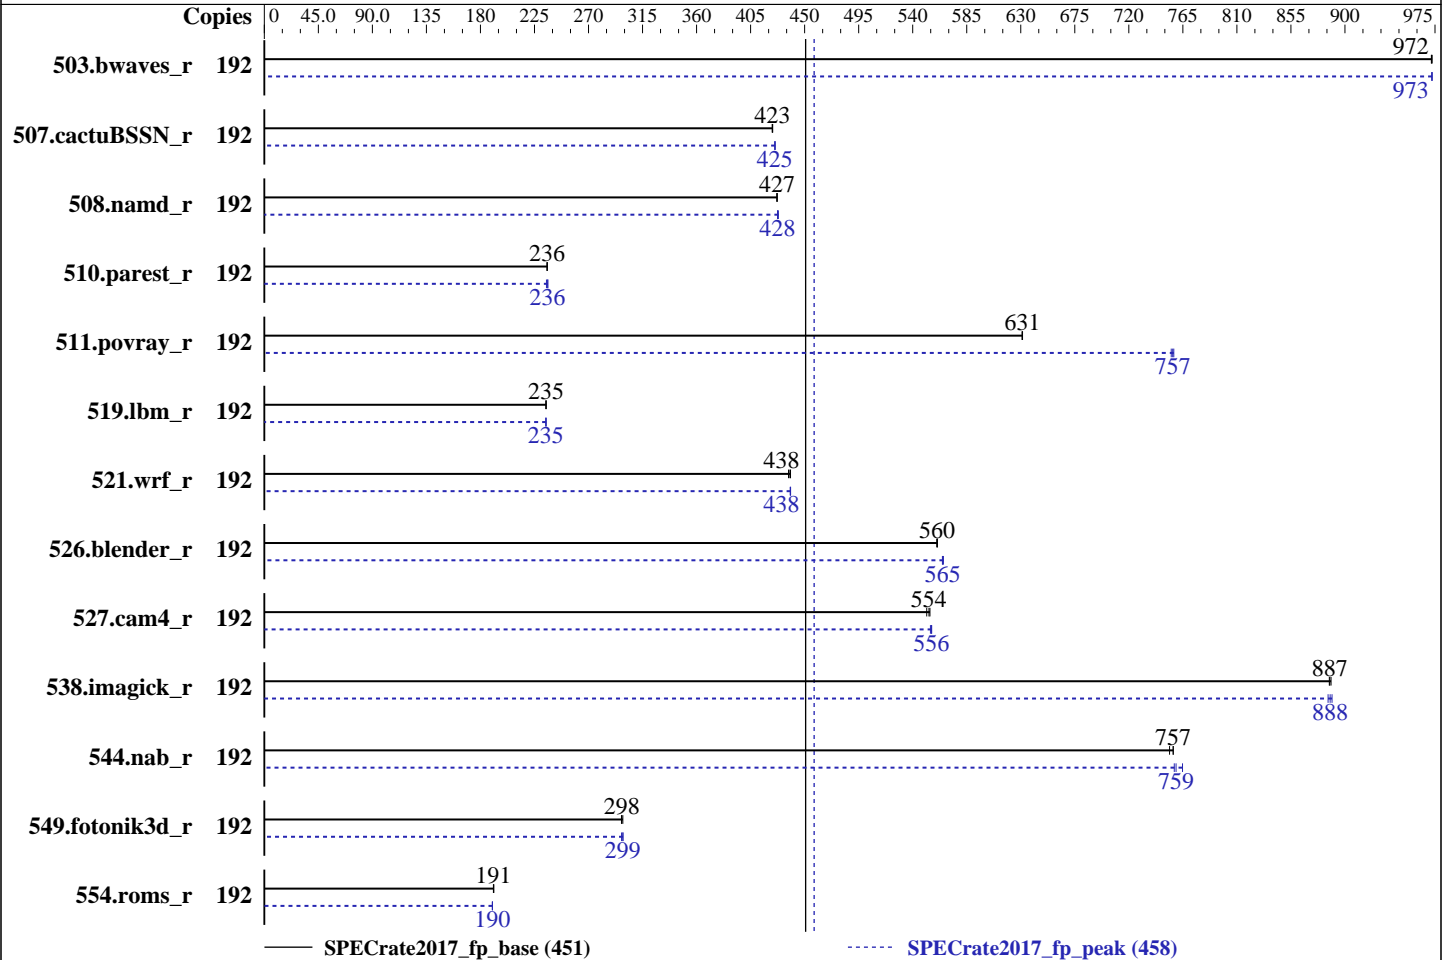

### Hardware

CPU Name: Intel Xeon Platinum 8168  
 Max MHz.: 3700  
 Nominal: 2700  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 900 GB 15K RPM SAS12  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.1.7 released Aug-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<b>1980</b>	<b>972</b>	1980	973	1981	972	192	1980	972	<b>1980</b>	<b>973</b>	1980	973
507.cactuBSSN_r	192	574	423	575	423	<b>574</b>	<b>423</b>	192	572	425	<b>572</b>	<b>425</b>	571	425
508.namd_r	192	<b>427</b>	<b>427</b>	427	427	427	427	192	<b>427</b>	<b>428</b>	427	427	426	428
510.parest_r	192	<b>2132</b>	<b>236</b>	2133	235	2131	236	192	<b>2129</b>	<b>236</b>	2127	236	2138	235
511.povray_r	192	710	631	710	631	<b>710</b>	<b>631</b>	192	<b>593</b>	<b>757</b>	592	757	594	755
519.lbm_r	192	<b>863</b>	<b>235</b>	863	235	862	235	192	<b>863</b>	<b>235</b>	862	235	863	234
521.wrf_r	192	<b>983</b>	<b>438</b>	985	437	981	438	192	981	438	982	438	<b>981</b>	<b>438</b>
526.blender_r	192	522	560	<b>522</b>	<b>560</b>	522	561	192	517	566	518	565	<b>518</b>	<b>565</b>
527.cam4_r	192	606	554	609	552	<b>607</b>	<b>554</b>	192	<b>604</b>	<b>556</b>	605	555	604	556
538.imagick_r	192	538	887	<b>538</b>	<b>887</b>	537	888	192	539	886	<b>538</b>	<b>888</b>	537	889
544.nab_r	192	<b>427</b>	<b>757</b>	427	757	429	754	192	<b>426</b>	<b>759</b>	423	765	426	758
549.fotonik3d_r	192	<b>2514</b>	<b>298</b>	2515	297	2506	299	192	<b>2506</b>	<b>299</b>	2515	298	2505	299
554.roms_r	192	1596	191	<b>1598</b>	<b>191</b>	1599	191	192	1606	190	<b>1606</b>	<b>190</b>	1606	190

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Platform Notes

BIOS settings:

Logical Processor Enabled  
 Virtualization Technology Disabled  
 Sub NUMA Cluster Enabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C1E Disabled  
 C States set to Autonomous  
 Uncore Frequency set to Dynamic  
 Memory Patrol Scrub Disabled  
 Energy Efficiency Policy set to Performance  
 CPU Interconnect Bus Link Power Management Disabled  
 PCI ASPM L1 Link Power Management Disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-4qdv Sun Oct 15 17:18:42 2017

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
 4 "physical id"s (chips)
 192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

Model name:          Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping:            4
CPU MHz:             2693.691
BogoMIPS:            5387.38
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            33792K
NUMA node0 CPU(s):  0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184
NUMA node1 CPU(s):  1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185
NUMA node2 CPU(s):  2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186
NUMA node3 CPU(s):  3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187
NUMA node4 CPU(s):  4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188
NUMA node5 CPU(s):  5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189
NUMA node6 CPU(s):  6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190
NUMA node7 CPU(s):  7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168
176 184
node 0 size: 95359 MB
node 0 free: 94912 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
177 185

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

node 1 size: 96760 MB
node 1 free: 96391 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170
178 186
node 2 size: 96760 MB
node 2 free: 96387 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
179 187
node 3 size: 96760 MB
node 3 free: 96395 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
180 188
node 4 size: 96760 MB
node 4 free: 96396 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
181 189
node 5 size: 96760 MB
node 5 free: 96395 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174
182 190
node 6 size: 96760 MB
node 6 free: 96387 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
183 191
node 7 size: 96757 MB
node 7 free: 96382 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  21  21  11  21  21  21
  1:  21  10  21  21  21  11  21  21
  2:  21  21  10  21  21  21  11  21
  3:  21  21  21  10  21  21  21  11
  4:  11  21  21  21  10  21  21  21
  5:  21  11  21  21  21  10  21  21
  6:  21  21  11  21  21  21  10  21
  7:  21  21  21  11  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      791224268 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Platform Notes (Continued)

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-4qdv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 15 07:42
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   796G  17G  779G   3% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.1.7 08/10/2017
Memory:
3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
21x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
24x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

CC 519.lbm\_r(peak) 544.nab\_r(peak)

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
FC 507.cactuBSSN\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 554.roms\_r(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017\_fp\_base = 451

SPECrate2017\_fp\_peak = 458

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:  
-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-15 20:18:41-0400.  
Report generated on 2018-10-31 13:04:34 by CPU2017 PDF formatter v6067.  
Originally published on 2017-11-14.