



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon


SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

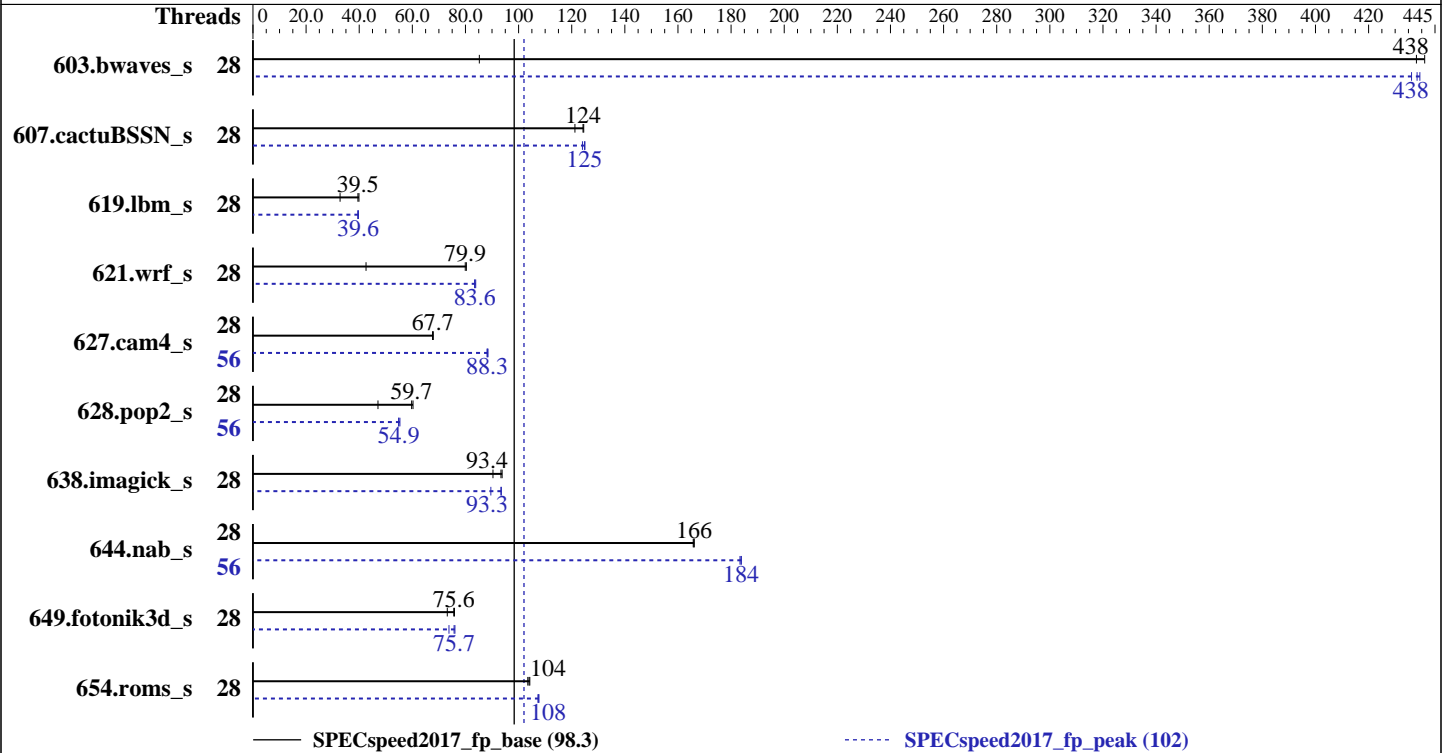

Hardware

CPU Name: Intel Xeon Gold 6132
 Max MHz.: 3700
 Nominal: 2600
 Enabled: 28 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2667V-R)
 Storage: 1 x 1.0 TB SATA, 7200 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: American Megatrends Inc. BIOS Version 0JGST024 released Nov-2017
 File System: xfs
 System State: Run level 3 (Multi User)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECSpeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECSpeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	28	692	85.2	135	438	134	441	28	135	438	134	439	135	436
607.cactuBSSN_s	28	138	121	134	125	134	124	28	134	125	134	124	133	125
619.lbm_s	28	160	32.8	133	39.5	131	39.9	28	132	39.7	133	39.5	132	39.6
621.wrf_s	28	311	42.6	165	79.9	165	80.3	28	158	83.6	159	83.4	158	83.9
627.cam4_s	28	131	67.7	131	67.6	131	67.9	56	101	88.1	100	88.3	100	88.5
628.pop2_s	28	252	47.1	199	59.7	197	60.3	56	215	55.3	216	54.9	216	54.9
638.imagick_s	28	160	90.4	155	93.4	154	93.8	28	154	93.5	155	93.3	161	89.6
644.nab_s	28	105	166	105	166	105	166	56	95.0	184	95.3	183	95.1	184
649.fotonik3d_s	28	125	73.2	120	75.9	121	75.6	28	120	76.0	120	75.7	124	73.8
654.roms_s	28	152	104	151	104	152	103	28	147	107	146	108	146	108

SPECSpeed2017_fp_base = 98.3

SPECSpeed2017_fp_peak = 102

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/tianyan/benchmarks/cpu2017/lib/ia32:/home/tianyan/benchmarks/cpu2017/lib/intel64:/home/tianyan/benchmarks/cpu2017/je5.0.1-32:/home/tianyan/benchmarks/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Platform Notes

Sysinfo program /home/tianyan/benchmarks/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost Fri Dec 8 23:59:13 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    2
Core(s) per socket:    14
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping:               4
CPU MHz:                2601.000
BogoMIPS:               5205.14
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               19712K
NUMA node0 CPU(s):     0-13,28-41
NUMA node1 CPU(s):     14-27,42-55
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 28 29 30 31 32 33 34 35 36 37 38 39 40 41
node 0 size: 195245 MB
node 0 free: 189616 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 196608 MB
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
node 1 free: 191023 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

```
From /proc/meminfo
MemTotal:      394687848 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 8 21:11
```

```
SPEC is set to: /home/tianyan/benchmarks/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   671G   29G  642G   5% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 0JGST024 11/15/2017American Megatrends Inc. 0JGST024
11/15/2017
Memory:
24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666
24x NO DIMM NO DIMM
```

(End of data from sysinfo program)
The dmidecode information displayed in sysinfo should have one line reading as:

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Base Portability Flags (Continued)

```
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

Peak Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP

638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs  
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Sugon-Purley-Platform-Settings-revA-I.html>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

SPECspeed2017_fp_base = 98.3

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_fp_peak = 102

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Purley-Platform-Settings-revA-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-08 10:59:13-0500.

Report generated on 2018-10-31 14:15:31 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.