



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10


(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

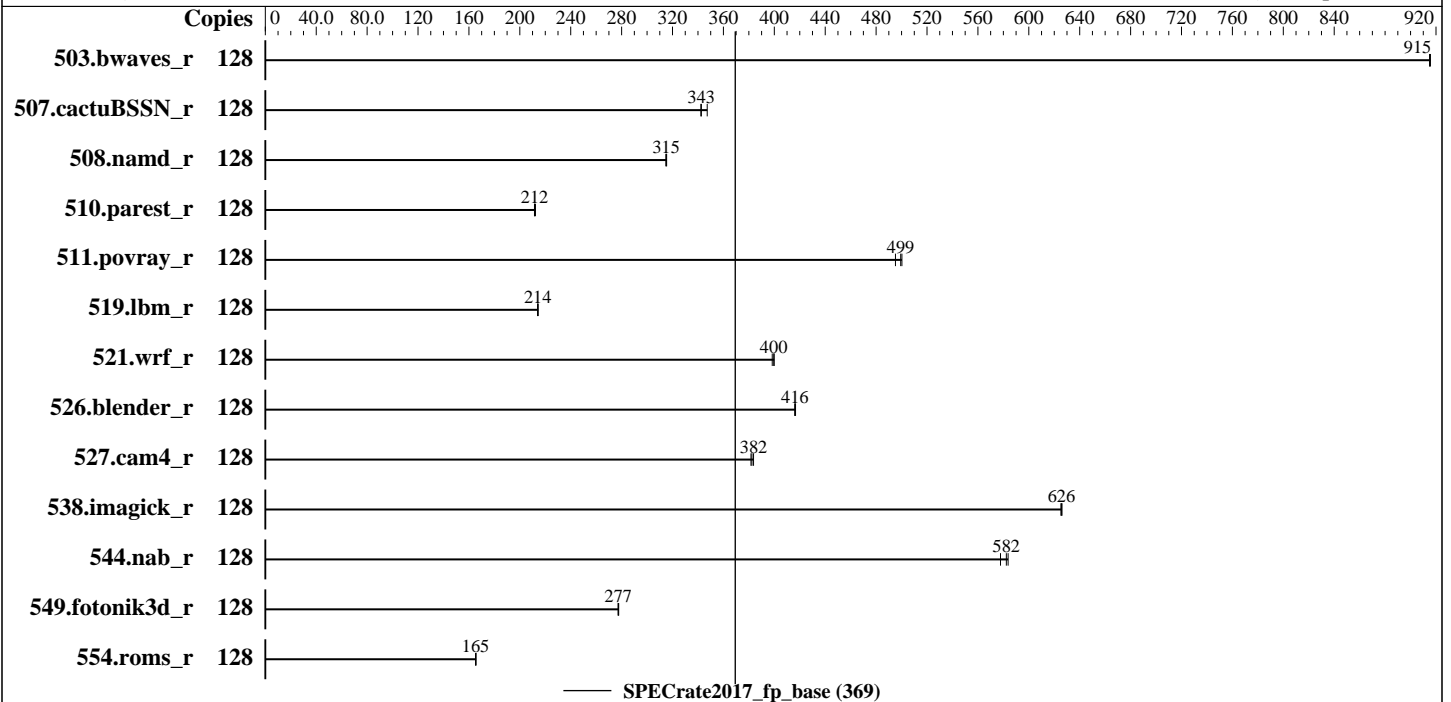

Hardware

CPU Name: Intel Xeon Gold 6143
Max MHz.: 4000
Nominal: 2800
Enabled: 64 cores, 4 chips, 2 threads/core
Orderable: 1, 2, 4 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 22 MB I+D on chip per chip
Other: None
Memory: 384 GB (48 x 8 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 960 GB SATA SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
Kernel 4.4.21-68-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: HPE BIOS Version U34 released Oct-2017 (tested with U34 9/29/2017)
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1403	915	1403	915	1402	916							
507.cactuBSSN_r	128	473	343	473	342	467	347							
508.namd_r	128	386	315	386	315	386	315							
510.parest_r	128	1577	212	1583	212	1582	212							
511.povray_r	128	597	500	599	499	604	495							
519.lbm_r	128	631	214	629	214	630	214							
521.wrf_r	128	718	400	720	398	717	400							
526.blender_r	128	469	416	468	416	468	417							
527.cam4_r	128	583	384	585	382	587	382							
538.imagick_r	128	508	626	509	626	509	625							
544.nab_r	128	369	584	370	582	373	578							
549.fotonik3d_r	128	1799	277	1798	277	1796	278							
554.roms_r	128	1231	165	1230	165	1228	166							

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017/je5.0.1-64"

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Enabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E State
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-mcua Sat Nov 18 01:59:21 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6143 CPU @ 2.80GHz
 4 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6143 CPU @ 2.80GHz
Stepping:             4
CPU MHz:              2793.435
BogoMIPS:             5586.87
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            22528K
NUMA node0 CPU(s):   0-7,64-71
NUMA node1 CPU(s):   8-15,72-79
NUMA node2 CPU(s):   16-23,80-87
NUMA node3 CPU(s):   24-31,88-95
NUMA node4 CPU(s):   32-39,96-103
NUMA node5 CPU(s):   40-47,104-111
NUMA node6 CPU(s):   48-55,112-119
NUMA node7 CPU(s):   56-63,120-127
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 47964 MB
node 0 free: 33834 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 48381 MB
node 1 free: 36057 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 48381 MB
node 2 free: 36150 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 48381 MB
node 3 free: 36171 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 48381 MB
node 4 free: 36140 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 48381 MB
node 5 free: 36185 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 48381 MB
node 6 free: 36163 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 48380 MB
node 7 free: 36178 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  31  31  31  31  31  31
  1:  21  10  31  31  31  31  31  31
  2:  31  31  10  21  31  31  31  31
  3:  31  31  21  10  31  31  31  31
  4:  31  31  31  31  10  21  31  31
  5:  31  31  31  31  21  10  31  31
  6:  31  31  31  31  31  31  10  21
  7:  31  31  31  31  31  31  21  10

```

```

From /proc/meminfo
MemTotal:      395913880 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-mcua 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016 (63cf368)
x86_64 x86_64 x86_64 GNU/Linux

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Platform Notes (Continued)

run-level 3 Nov 17 08:25

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xf	852G	182G	670G	22%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 09/29/2017

Memory:

48x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CXXC 508.namd_r(base) 510.parest_r(base)
=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CC 511.povray_r(base) 526.blender_r(base)
=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
FC 507.cactuBSSN_r(base)
=====

icpc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```




SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

SPECrate2017_fp_base = 369

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-18 01:59:20-0500.

Report generated on 2018-10-31 17:13:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.