



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3


Test Date: Jul-2017

Test Sponsor: HPE

Hardware Availability: Jul-2018

Tested by: HPE

Software Availability: Feb-2018

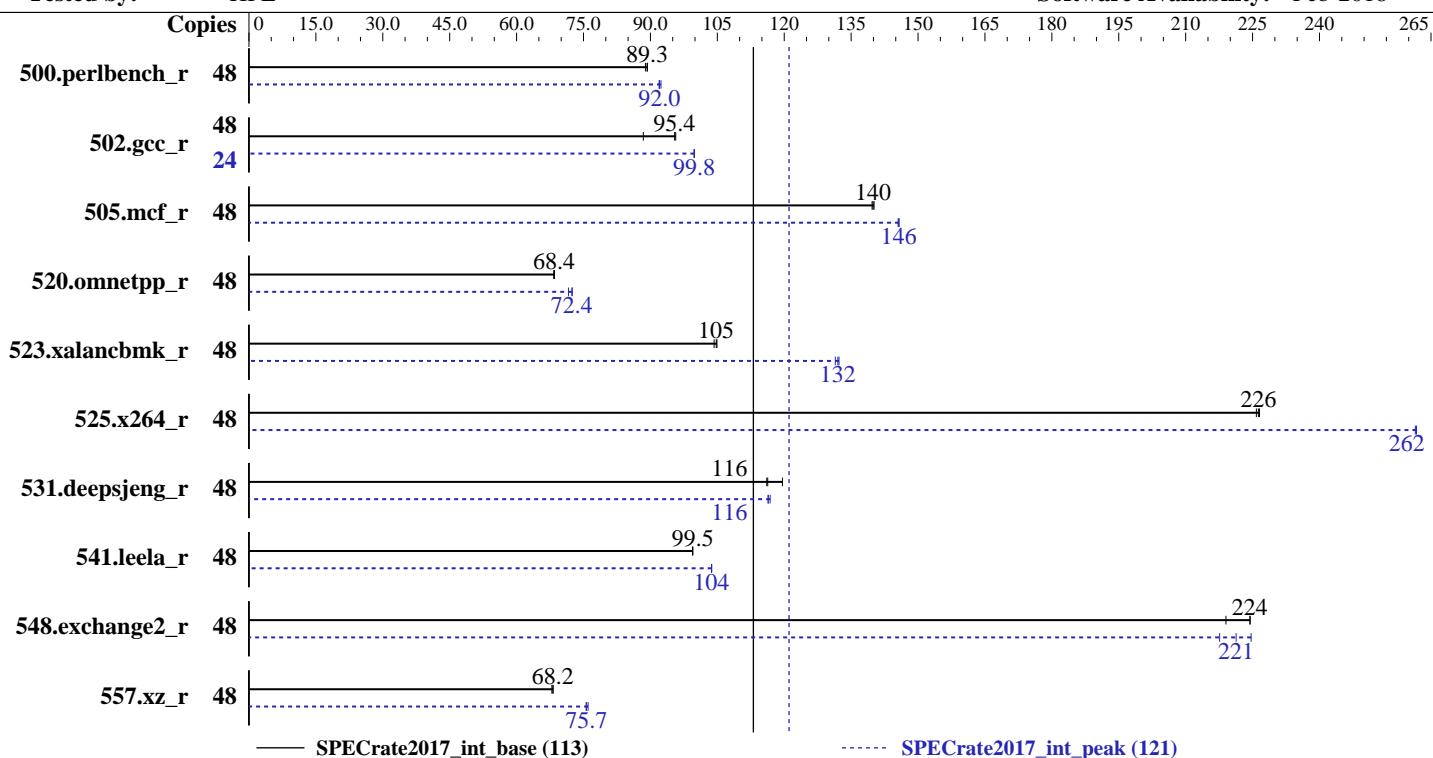

— SPECrate2017\_int\_base (113)

----- SPECrate2017\_int\_peak (121)

## Hardware

CPU Name: AMD EPYC 7401P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-L,  
 running at 2400)  
 Storage: 1 x 400 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.131-94.25-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: HPE BIOS Version A41 04/06/2018 released Apr-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc general purpose malloc implementation v4.5.0;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Date: Jul-2017

Test Sponsor: HPE

Hardware Availability: Jul-2018

Tested by: HPE

Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	855	89.3	<b>856</b>	<b>89.3</b>	860	88.9	48	<b>830</b>	<b>92.0</b>	827	92.4	831	91.9
502.gcc_r	48	710	95.7	769	88.4	<b>712</b>	<b>95.4</b>	24	341	99.8	340	99.9	<b>340</b>	<b>99.8</b>
505.mcf_r	48	555	140	<b>554</b>	<b>140</b>	554	140	48	532	146	533	146	<b>532</b>	<b>146</b>
520.omnetpp_r	48	<b>921</b>	<b>68.4</b>	919	68.5	922	68.3	48	879	71.6	<b>870</b>	<b>72.4</b>	869	72.5
523.xalancbmk_r	48	<b>484</b>	<b>105</b>	483	105	486	104	48	<b>384</b>	<b>132</b>	383	132	386	131
525.x264_r	48	<b>371</b>	<b>226</b>	372	226	371	227	48	321	261	321	262	<b>321</b>	<b>262</b>
531.deepsjeng_r	48	460	120	474	116	<b>473</b>	<b>116</b>	48	471	117	<b>472</b>	<b>116</b>	473	116
541.leela_r	48	<b>799</b>	<b>99.5</b>	799	99.5	799	99.5	48	<b>766</b>	<b>104</b>	767	104	766	104
548.exchange2_r	48	560	224	574	219	<b>560</b>	<b>224</b>	48	<b>568</b>	<b>221</b>	560	225	<b>578</b>	218
557.xz_r	48	760	68.2	763	67.9	<b>761</b>	<b>68.2</b>	48	686	75.6	<b>685</b>	<b>75.7</b>	682	76.0

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

sync then drop\_caches=3 to reset caches before invoking runcpu

Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were

all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

IRQ balance service stopped using "systemctl stop irqbalance.service"

Tuned profile set with "tuned-adm profile throughput-performance"



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32;"  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.2 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Performance Determinism set to Power Deterministic

Processor Power and Utilization Monitoring set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C6 State

Sysinfo program /cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-6qav Sun Jul 16 08:05:06 2017

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Platform Notes (Continued)

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7401P 24-Core Processor
  1 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401P 24-Core Processor
Stepping:               2
CPU MHz:                2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              3992.46
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:                512K
L3 cache:                8192K
NUMA node0 CPU(s):     0-5,24-29
NUMA node1 CPU(s):     6-11,30-35
NUMA node2 CPU(s):     12-17,36-41
NUMA node3 CPU(s):     18-23,42-47
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

**Test Date:** Jul-2017

Test Sponsor: HPE

**Hardware Availability:** Jul-2018

Tested by: HPE

**Software Availability:** Feb-2018

## Platform Notes (Continued)

```
hw_pstate rds retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale  
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase  
bmil avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero  
irperf ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29  
node 0 size: 128839 MB  
node 0 free: 128650 MB  
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35  
node 1 size: 129021 MB  
node 1 free: 128822 MB  
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41  
node 2 size: 129021 MB  
node 2 free: 128831 MB  
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47  
node 3 size: 129020 MB  
node 3 free: 128826 MB  
node distances:  
node 0 1 2 3  
 0: 10 16 16 16  
 1: 16 10 16 16  
 2: 16 16 10 16  
 3: 16 16 16 10
```

From /proc/meminfo

```
MemTotal:      528285304 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 12 SP3
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:  
SUSE Linux Enterprise Server 12 (x86_64)  
VERSION = 12  
PATCHLEVEL = 3  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
NAME="SLES"
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Platform Notes (Continued)

```
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-6qav 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB
```

run-level 3 Jul 16 07:59

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	371G	21G	349G	6%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 04/06/2018

Memory:

```
8x UNKNOWN NOT AVAILABLE
8x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 502.gcc_r(peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Compiler Version Notes (Continued)

=====

CXXC 523.xalancbmk\_r(peak)

-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

-----

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

-----

=====

CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

-----

=====

CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

-----

=====

CXXC 541.leela\_r(peak)

-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2017

Hardware Availability: Jul-2018

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

=====

FC 548.exchange2\_r(base, peak)

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

---

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Base Optimization Flags

C benchmarks:

```
-floop -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-floop -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3  
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-floop -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)  
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs -Ofast  
-fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Peak Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc  
  
502.gcc\_r: -m32 -fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -fgnu89-inline  
-L/root/work/lib/jemalloc/lib32 -ljemalloc  
  
505.mcf\_r: -fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc  
  
525.x264\_r: Same as 500.perlbench\_r  
  
557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc  
  
523.xalancbmk\_r: -m32 -fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7401P)

**SPECrate2017\_int\_base = 113**

**SPECrate2017\_int\_peak = 121**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jul-2017

**Hardware Availability:** Jul-2018

**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -maxv2  
-madx -funroll-loops -ffast-math -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2017-07-16 09:05:05-0400.

Report generated on 2018-10-31 19:07:24 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.