



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2018  
Hardware Availability: Dec-2018  
Software Availability: Feb-2018

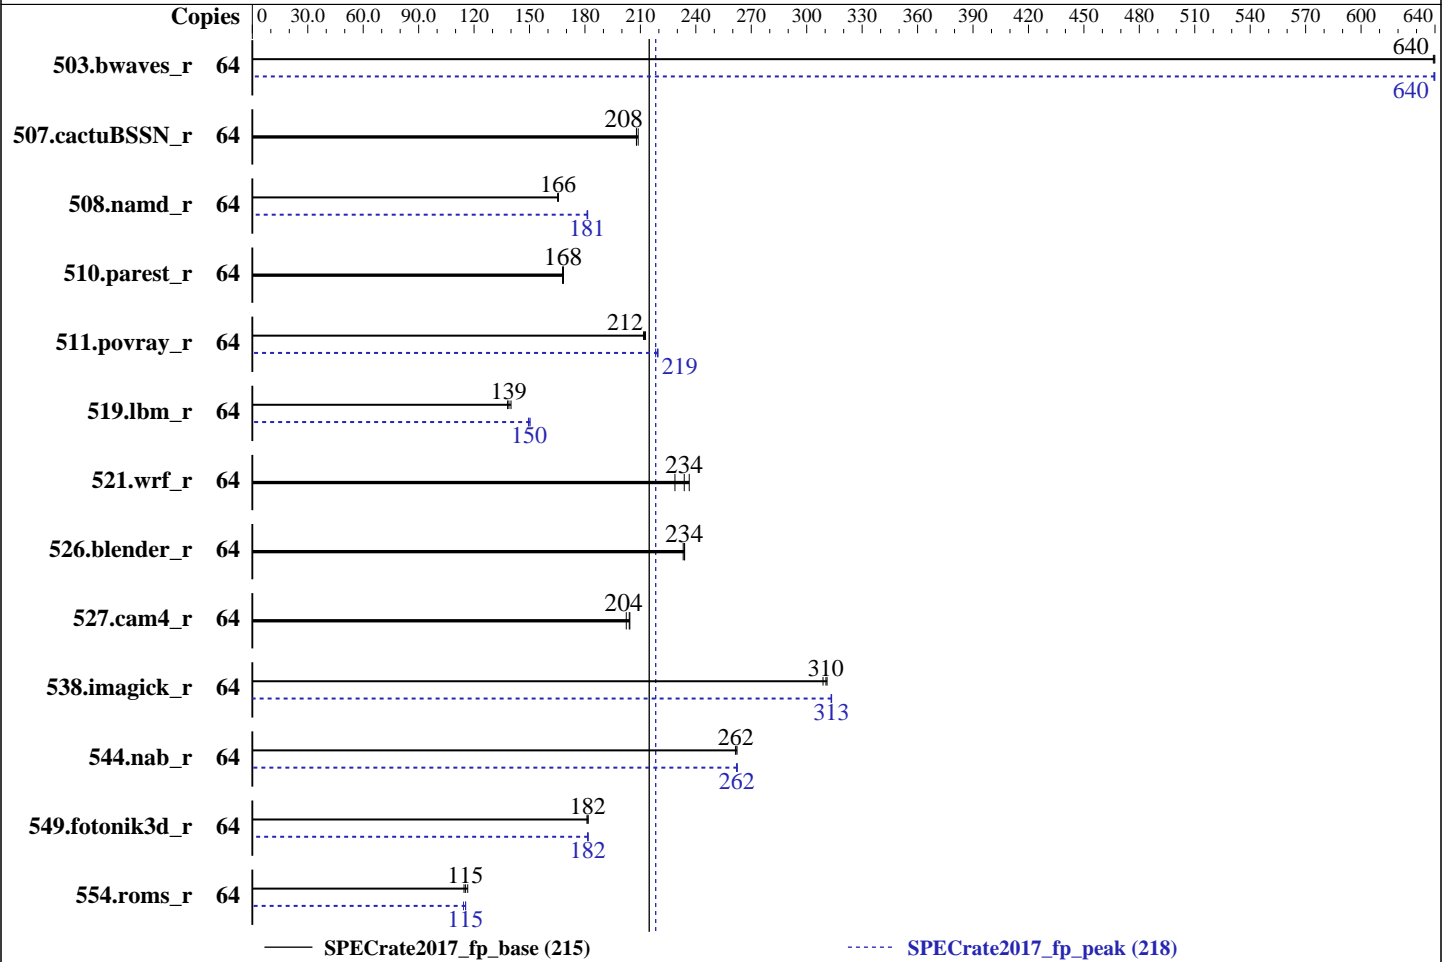

### Hardware

CPU Name: AMD EPYC 7371  
 Max MHz.: 3800  
 Nominal: 3100  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 500 GB SATAIII, 7200 RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.1c released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc general purpose malloc implementation V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2018  
Hardware Availability: Dec-2018  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1003	640	<b>1004</b>	<b>640</b>	1004	639	64	<b>1003</b>	<b>640</b>	1003	640	1004	639
507.cactuBSSN_r	64	<b>390</b>	<b>208</b>	388	209	390	208	64	<b>390</b>	<b>208</b>	388	209	390	208
508.namd_r	64	368	165	<b>367</b>	<b>166</b>	367	166	64	335	181	335	181	<b>335</b>	<b>181</b>
510.parest_r	64	997	168	<b>996</b>	<b>168</b>	995	168	64	997	168	<b>996</b>	<b>168</b>	995	168
511.povray_r	64	706	212	702	213	<b>704</b>	<b>212</b>	64	<b>682</b>	<b>219</b>	681	220	685	218
519.lbm_r	64	488	138	<b>486</b>	<b>139</b>	482	140	64	<b>450</b>	<b>150</b>	451	149	449	150
521.wrf_r	64	627	229	606	236	<b>613</b>	<b>234</b>	64	627	229	606	236	<b>613</b>	<b>234</b>
526.blender_r	64	418	233	<b>417</b>	<b>234</b>	417	234	64	418	233	<b>417</b>	<b>234</b>	417	234
527.cam4_r	64	548	204	553	202	<b>549</b>	<b>204</b>	64	548	204	553	202	<b>549</b>	<b>204</b>
538.imagick_r	64	<b>513</b>	<b>310</b>	515	309	512	311	64	<b>508</b>	<b>313</b>	508	313	508	313
544.nab_r	64	<b>412</b>	<b>262</b>	411	262	412	261	64	<b>411</b>	<b>262</b>	411	262	410	262
549.fotonik3d_r	64	<b>1374</b>	<b>182</b>	1372	182	1377	181	64	<b>1373</b>	<b>182</b>	1375	181	1372	182
554.roms_r	64	<b>881</b>	<b>115</b>	888	115	872	117	64	<b>881</b>	<b>115</b>	890	114	881	115

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd1704-rate-libs-revD/64"  
MALLOC\_CONF = "lg\_chunk:28"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4 jemalloc, a general purpose malloc implementation, was obtained at <https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2> jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Determinism Slider = Power

sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-769d Sat Dec 15 01:32:08 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

```
model name : AMD EPYC 7371 16-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
  physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7371 16-Core Processor
Stepping:               2
CPU MHz:                3100.000
CPU max MHz:            3100.0000
CPU min MHz:            2500.0000
BogoMIPS:               6200.31
Virtualization:         AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-3,32-35
NUMA node1 CPU(s):     4-7,36-39
NUMA node2 CPU(s):     8-11,40-43
NUMA node3 CPU(s):     12-15,44-47
NUMA node4 CPU(s):     16-19,48-51
NUMA node5 CPU(s):     20-23,52-55
NUMA node6 CPU(s):     24-27,56-59
NUMA node7 CPU(s):     28-31,60-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

osvw skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx arat cpb  
hw\_pstate retpoline retpoline\_amd npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean  
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2  
smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 clzero irperf  
ibpb overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128852 MB
node 0 free: 128689 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129022 MB
node 1 free: 128789 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129022 MB
node 2 free: 128883 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129022 MB
node 3 free: 128859 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129022 MB
node 4 free: 128905 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129022 MB
node 5 free: 128899 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129022 MB
node 6 free: 128900 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 116925 MB
node 7 free: 116805 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      1044388548 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-769d 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB
```

run-level 3 Dec 14 15:34

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   422G   28G  394G   7% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 1.1c 10/09/2018
Memory:
16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667
```

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT, AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Compiler Version Notes

=====  
CC 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
FC 507.cactuBSSN\_r(base, peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

### Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

### Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
clang gfortran

Benchmarks using both Fortran and C:  
clang gfortran

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs  
-ljemalloc

C++ benchmarks:  
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -mavx -madox -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -mavx -madox  
-funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -mavx -madox -funroll-loops -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7371)

SPECrate2017\_fp\_base = 215

SPECrate2017\_fp\_peak = 218

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madox -funroll-loops
-ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive
-ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>  
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-14 12:32:07-0500.  
Report generated on 2019-01-22 16:42:09 by CPU2017 PDF formatter v6067.  
Originally published on 2019-01-22.