



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation


SPECspeed2017\_int\_base = 10.0

### Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Dec-2018  
Hardware Availability: Dec-2018  
Software Availability: Aug-2018

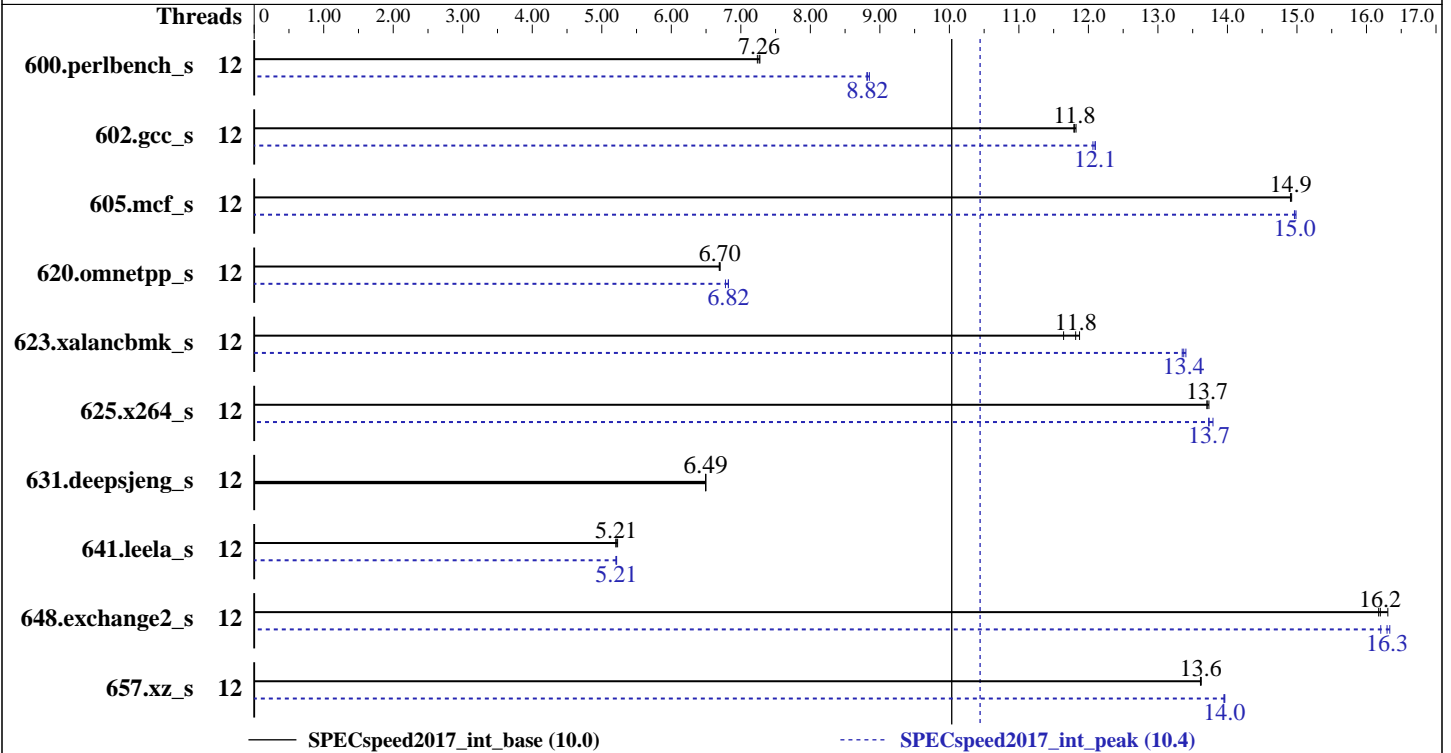

### Hardware

CPU Name: Intel Xeon E-2146G  
Max MHz.: 4500  
Nominal: 3500  
Enabled: 6 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 12 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x 1 TB SATA, 7200 RPM  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
Kernel 3.10.0-862.11.6.el7.x86\_64  
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: NEC BIOS Version F07 10/31/2018 released Dec-2018  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_int\_base = 10.0

### Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Dec-2018  
Hardware Availability: Dec-2018  
Software Availability: Aug-2018

## Results Table

| Benchmark       | Base    |            |             |            |             |            | Peak        |         |            |             |            |             |            |             |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 600.perlbench_s | 12      | 245        | 7.24        | 244        | 7.27        | <b>244</b> | <b>7.26</b> | 12      | <b>201</b> | <b>8.82</b> | 201        | 8.81        | 201        | 8.85        |
| 602.gcc_s       | 12      | 337        | 11.8        | 338        | 11.8        | <b>337</b> | <b>11.8</b> | 12      | <b>329</b> | <b>12.1</b> | 329        | 12.1        | 330        | 12.1        |
| 605.mcf_s       | 12      | 316        | 14.9        | <b>317</b> | <b>14.9</b> | 317        | 14.9        | 12      | <b>315</b> | <b>15.0</b> | 315        | 15.0        | 315        | 15.0        |
| 620.omnetpp_s   | 12      | 243        | 6.70        | 244        | 6.69        | <b>244</b> | <b>6.70</b> | 12      | <b>239</b> | <b>6.82</b> | 239        | 6.82        | 241        | 6.78        |
| 623.xalancbmk_s | 12      | <b>120</b> | <b>11.8</b> | 122        | 11.6        | 119        | 11.9        | 12      | <b>106</b> | <b>13.4</b> | 106        | 13.3        | 106        | 13.4        |
| 625.x264_s      | 12      | 128        | 13.7        | 129        | 13.7        | <b>129</b> | <b>13.7</b> | 12      | <b>128</b> | <b>13.7</b> | 128        | 13.7        | 128        | 13.8        |
| 631.deepsjeng_s | 12      | 221        | 6.50        | 221        | 6.49        | <b>221</b> | <b>6.49</b> | 12      | 221        | 6.50        | 221        | 6.49        | <b>221</b> | <b>6.49</b> |
| 641.leela_s     | 12      | 326        | 5.23        | 328        | 5.20        | <b>328</b> | <b>5.21</b> | 12      | 327        | 5.21        | 328        | 5.20        | <b>327</b> | <b>5.21</b> |
| 648.exchange2_s | 12      | 180        | 16.3        | 182        | 16.2        | <b>181</b> | <b>16.2</b> | 12      | <b>180</b> | <b>16.3</b> | 181        | 16.2        | 180        | 16.3        |
| 657.xz_s        | 12      | 454        | 13.6        | 454        | 13.6        | <b>454</b> | <b>13.6</b> | 12      | 443        | 14.0        | <b>443</b> | <b>14.0</b> | 443        | 14.0        |

SPECspeed2017\_int\_base = **10.0**

SPECspeed2017\_int\_peak = **10.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_int\_base = 10.0

### Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Aug-2018

## Platform Notes

### BIOS Settings:

VT-x: Disabled  
Energy Efficient P-state: Disabled  
Energy Efficient Turbo: Disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on t110js Sun Dec 23 23:40:10 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz
 1 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 6
  siblings      : 12
  physical 0    : cores 0 1 2 3 4 5
```

### From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                12
On-line CPU(s) list:   0-11
Thread(s) per core:    2
Core(s) per socket:    6
Socket(s):             1
NUMA node(s):         1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                158
Model name:            Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz
Stepping:              10
CPU MHz:               4300.659
CPU max MHz:           4500.0000
CPU min MHz:           800.0000
BogoMIPS:              7008.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              256K
L3 cache:              12288K
NUMA node0 CPU(s):    0-11
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_int\_base = 10.0

### Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Aug-2018

## Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 sse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch intel\_pt ssbd ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida arat pln pts hwp hwp\_notify hwp\_act\_window hwp\_epp spec\_ctrl intel\_stibp flush\_lld

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 65455 MB
node 0 free: 63562 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65894340 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
Linux t110js 3.10.0-862.11.6.el7.x86_64 #1 SMP Fri Aug 10 16:55:11 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_int\_base = 10.0

### Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Aug-2018

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Dec 23 23:34

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3  | ext4 | 909G | 118G | 745G  | 14%  | /          |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. F07 10/31/2018

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base, peak) 657.xz\_s(base)  
-----

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)  
-----

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
-----

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed2017\_int\_base = 10.0

Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Dec-2018  
**Hardware Availability:** Dec-2018  
**Software Availability:** Aug-2018

## Compiler Version Notes (Continued)

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base, peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed2017\_int\_base = 10.0

Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
623.xalancbmk_s: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_int\_base = 10.0

Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
602.gcc_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-w1, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed2017\_int\_base = 10.0

Express5800/T110j-S (Intel Xeon E-2146G)

SPECspeed2017\_int\_peak = 10.4

**CPU2017 License:** 9006

**Test Date:** Dec-2018

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Dec-2018

**Tested by:** NEC Corporation

**Software Availability:** Aug-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-23 09:40:09-0500.

Report generated on 2019-01-22 16:43:02 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.